

ETSI TS 103 683 V1.1.1 (2020-02)



**Mobile Standards Group (MSG);
Testing;
Next Generation eCall High Level Application Protocol (HLAP)
Interoperability Testing**

Standard for Review
Full standard: https://standards.iteh.ai/catalog/standards/sist/b232209-1282-4ecc-bf49-5b09e5767b3c/etsi-ts-103-683-v1.1.1-2020-02

ReferenceDTS/MSG-001128

KeywordseCall, interoperability, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	7
3 Definition of terms, symbols and abbreviations.....	7
3.1 Terms.....	7
3.2 Symbols.....	8
3.3 Abbreviations	8
4 Conventions.....	9
4.1 Interoperability test process.....	9
4.1.1 Principles	9
4.1.2 The test description proforma	9
4.1.3 Interoperable Functions Statement	9
4.2 Tooling	10
4.3 Test Description naming convention	10
4.4 Test Summary	10
5 Test Bed Architecture.....	12
5.1 Test site layout	12
5.2 NG eCall H LAP flow diagram	14
6 Test Configurations	16
6.0 Introduction	16
6.1 Home Interoperability Test Configuration	16
6.2 Home Interoperability Test Configuration with fallback to legacy eCall.....	17
6.3 Visited Interoperability Test Configuration	17
6.4 Multiple IVS Interoperability Test Configuration.....	18
6.5 Home Interoperability Test Configuration rerouting to another PSAP	18
6.6 Home Interoperability Test Configuration without VoIMS support	18
6.7 Default pre-test conditions	19
6.8 Interoperable Functions Statement (IFS).....	19
7 NG eCall test scenarios/descriptions.....	20
7.0 Introduction	20
7.1 Basic test scenarios.....	21
7.1.1 Initiation of manual eCall	21
7.1.2 Initiation of automatic eCall	21
7.1.3 Initiation of test eCall	22
7.1.4 MSD transfer to PSAP supporting IMS eCall.....	22
7.1.5 MSD transfer to PSAP supporting IMS eCall in roaming scenario	23
7.1.6 PSAP initiated callback to IVS and MSD update	24
7.1.7 PSAP initiated call clear-down	26
7.1.8 IVS initiated call clear-down not allowed.....	27
7.1.9 Verification of audio interfaces of IVS and PSAP.....	27
7.1.10 MSD update on request from PSAP	28
7.1.11 IVS behaviour after unsuccessful MSD update	28
7.1.12 IVS behaviour after unacknowledged MSD update.....	29
7.1.13 Format of encoded and decoded MSD in accordance with CEN EN 15722:2015.....	30
7.1.14 MSD transfer via in-band modem to PSAP supporting IMS eCall.....	31
7.2 Advanced test scenarios	32
7.2.1 MSD transfer to PSAP supporting IMS eCall over IPv4.....	32
7.2.2 MSD transfer to PSAP supporting IMS eCall over IPv6.....	32

7.2.3	MSD transfer to PSAP supporting IMS eCall over IPv4(IVS)/IPv6(PSAP)	33
7.2.4	MSD transfer to PSAP not supporting IMS eCall	34
7.2.5	IMS eCall establishment with IMS emergency registration	36
7.2.6	IMS eCall establishment without IMS emergency registration	38
7.2.7	IMS eCall establishment without IMS emergency registration GIBA supported	38
7.3	Advanced IVS test scenarios	39
7.3.1	Fallback to legacy eCall following busy during call setup	39
7.3.2	Fallback to legacy eCall following unavailable response during call setup	41
7.3.3	Fallback to legacy eCall following no-answer during call setup	42
7.3.4	Dropped eCall after MSD has been acknowledged	44
7.3.5	Dropped eCall before call has been established	45
7.3.6	IVS configured for 'eCall only' service (restricted)	46
7.3.7	eCall is attempted when no networks are available (limited service condition with forbidden PLMN on SIM/USIM)	46
7.3.8	MSD transfer to PSAP supporting IMS eCall via PLMN without VoIMS support	47
7.3.9	Termination of manually triggered eCall by vehicle occupant	47
7.3.10	Termination of automatically triggered eCall by vehicle occupant not allowed/not possible	48
7.3.11	Ongoing eCall shall not be disconnected if new trigger is received	48
7.4	Advanced PSAP test scenarios	49
7.4.1	PSAP handling of more than 1 eCall simultaneously	49
7.4.2	PSAP correct MSD additional data decoding	49
7.4.3	Rerouting to another PSAP/emergency control centre	50
7.4.4	PSAP operator user interface	50
Annex A (informative): Source code of MSC figures		51
A.1	Overview	51
History		52

iTeh STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/b22d412-1282-4ccc-bf49-5b09e5767b3c/etsi-ts-103-683-v1.1.1-2020-02>

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Mobile Standards Group (MSG).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document defines Interoperability Test Descriptions for the NG eCall High Level Application Protocol (HLAP).

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 124 229 (V14.10.0): "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3 (3GPP TS 24.229 version 14.10.0 Release 14)".
- [2] ETSI TS 123 167 (V14.6.0): "Universal Mobile Telecommunications System (UMTS); LTE; IP Multimedia Subsystem (IMS) emergency sessions (3GPP TS 23.167 version 14.6.0 Release 14)".
- [3] ETSI TS 123 228 (V14.6.0): "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; IP Multimedia Subsystem (IMS); Stage 2 (3GPP TS 23.228 version 14.6.0 Release 14)".
- [4] CEN TS 17184:2018: "Intelligent transport systems - eSafety - eCall High level application Protocols (HLAP) using IMS packet switched networks".
- [5] EENA Technical Committee Document: "Next Generation eCall".
- [6] ETSI TS 123 401 (V14.10.0): "LTE; General Packet Radio Service (GPRS) enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) access (3GPP TS 23.401 version 14.10.0 Release 14)".
- [7] CEN EN 16072:2015: "Intelligent transport systems - eSafety - Pan European eCall - Operating requirements".
- [8] IETF RFC 8147: "Next-Generation Pan-European eCall".
- [9] ETSI TS 103 428 (V1.1.1): "Mobile Standards Group (MSG); eCall HLAP Interoperability Testing".
- [10] CEN EN 15722:2015: "Intelligent transport systems - ESafety - Ecall minimum set of data".
- [11] ETSI TS 122 101 (V14.7.0): "Universal Mobile Telecommunications System (UMTS); LTE; Service aspects; Service principles (3GPP TS 22.101 version 14.7.0 Release 14)".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI ETR 266: "Methods for Testing and Specification (MTS); Test Purpose style guide".
- [i.2] CEN EN 16062:2011: "Intelligent Transport Systems - eSafety - eCall - High Level Application Requirements (HLAP)".
- [i.3] ETSI EG 202 798 (V1.1.1): "Intelligent Transport Systems (ITS); Testing; Framework for conformance and interoperability testing".
- [i.4] [PlantUML](#).

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

base specification: specification of a protocol, telecommunication service, interface, abstract syntax, encoding rules, or information object

eCall: manually or automatically initiated emergency call, (TS12) from a vehicle, supplemented with a minimum set of emergency related data (MSD), as defined under the EU Commission's eSafety initiative

eCall Over IMS support (ECL): As indicated by the eCall support indicator defined in ETSI TS 123 401 [6].

implementation: instance of the reference specification for which conformity to that reference specification is claimed

IMS eCall: eCall deployed using IMS emergency call in 3GPP Release-14, instead of in-band modem and circuit switched 112

NOTE: This definition is taken from EENA Technical Committee Document [5].

IMS Emergency Service support (EMS): IMS Emergency Services supported as indicated by Emergency Service Support indicator as defined in ETSI TS 123 401 [6].

In-band modem eCall: eCall deployed using in-band modem and circuit switched 112 according to CEN EN 16062:2011 [i.2] and CEN EN 16072:2015 [7]

NOTE: This definition is based on definition in EENA Technical Committee Document [5].

IVS configured for eCall only service (restricted): eCall capable IVS that is not subscribed to other non-emergency services

NOTE: The IVS is not permitted to register on a PLMN except for the purpose of making an eCall, or a test/reconfiguration call to a designated non-emergency number, in accordance with ETSI TS 122 101 [11]. Following power-up the IVS may perform a PLMN search and maintain a list of available networks upon which to register, when an eCall or test/reconfiguration call is activated. Following an eCall or test/reconfiguration call, the IVS de-registers from the serving network within 12 hours.

IVS configured for eCall and other services (unrestricted): eCall capable IVS that has valid subscriptions to access other non-emergency services

NOTE: The IVS may register on a PLMN at any time and may remain registered on a serving network indefinitely.

Minimum Set of Data (MSD): data component of an eCall sent from a vehicle to a Public Safety Answering Point or other designated emergency call centre

NOTE: The MSD has a maximum size of 140 bytes and includes, for example, vehicle identity, location information and time-stamp, as defined in CEN EN 15722:2015 [10].

Next Generation eCall (NG eCall): based on IMS eCall and offering data, multimedia and two-way data

NOTE: This definition is based on definition in EENA Technical Committee Document [5].

Plugfest: interoperability testing event about a standard or a profile where the participants test each other their implementation

PSAP eCall Modem-server: PSAP equipment used to receive, validate and acknowledge the MSD sent from an IVS, to manage the voice call transfer to the PSAP operator and to facilitate callback to the vehicle

NOTE: The eCall modem-server may also support other functions.

reference specification: standard which provides a base specification, or a set of base specifications, or a profile, or a set of profiles, and for conformance to which the ICS proforma and test specifications are written

VoIMS: voice over IMS over PS sessions support as indicated by IMS Voice over PS session supported indication as defined in ETSI TS 123 401 [6]

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

3GPP	Third Generation Partnership Project
ACK	ACKnowledgement
CEN	Comité Européen de Normalisation
CFG	ConFiGuration
CS	Circuit Switched
CSCF	Call Session Control Function
E-CSCF	Emergency CSCF
E-UTRAN	Enhanced UMTS Terrestrial Radio Access Network
ECL	eCall Over IMS support
EMS	IMS Emergency Services
ETR	ETSI Technical Report
ETSI	European Telecommunications Standards Institute
EU	European Union
EUT	Equipment Under Test
GIBA	GPRS-IMS-Bundled-Authentication
GSM	Global System of Mobile telecommunications
HLAP	High Level Application Protocol
HMI	Human Machine Interface
HPLMN	Home PLMN
HSS	Home Subscriber Server
I-CSCF	Interrogating CSCF
IFS	Interoperable Functions Statement
IFS_ID	IFS Identifier
IMEI	International Mobile Equipment Identity

IMS	IP Multimedia Subsystem
IVS	In Vehicle System
LTE	Long Term Evolution
MNO	Mobile Network Operator
MSD	Minimum Set of Data
NACK	Negative Acknowledgement
NG	Next Generation
P-CSCF	Proxy CSCF
PLMN	Public Land Mobile Network
PS	Packet Switched
PSAP	Public Service Answering Point
S-CSCF	Serving CSCF
SIP	Session Initiation Protocol
TD	Test Description
TS11	Teleservice No 11 (Telephony)
TS12	Teleservice No 12 (Emergency Calls)
UMTS	Universal Mobile Telecommunications System
URN	Unique Resource Name
VoIMS	Voice over IMS
VoLTE	Voice over LTE
VPLMN	Visited PLMN

4 Conventions

4.1 Interoperability test process

4.1.1 Principles

The goal of interoperability tests is to check that devices resulting from protocol implementations are able to work together and provide the functionalities provided by the protocols. As necessary, one message may be checked during a test, when a successful functional verification may result from an incorrect behaviour for instance. Detailed protocol checks are part of the conformance testing process and are thus avoided during the interoperability tests.

4.1.2 The test description proforma

The test descriptions are provided in proforma tables following the format described in ETSI EG 202 798 [i.3] and ETSI ETR 266 [i.1]. The following different test event types are considered during the test execution:

- A **stimulus** corresponds to an event that enforces an EUT to proceed with a specific protocol action, like sending a message for instance.
- A **verify** consists of verifying that the EUT behaves according to the expected behaviour (for instance the EUT behaviour shows that it receives the expected message).
- A **configure** corresponds to an action to modify the EUT configuration.
- A **check** ensures the receipt of protocol messages on reference points, with valid content. This "check" event type corresponds to the interoperability testing with conformance check method.

4.1.3 Interoperable Functions Statement

The "Interoperable Functions Statement" (IFS) identifies the standardized functions of an EUT. These functions can be mandatory, optional or conditional (depending on other functions), and depend on the role played by the EUT.

The IFS can also be used as a pro-forma by a vendor to identify the functions that its EUT will support when interoperating with corresponding functions from other vendors.

Item column

The item column contains a number, which identifies the item.

Item description column

The item description column describes in free text each respective item (e.g. parameters, timers, etc.). It implicitly means "is <item description> supported by the implementation?".

IFS ID column

The IFS ID column defines an identifier for this particular IFS item. The IFS ID is in the Test Description field "Applicability" to select/deselect the execution of a test.

Status column

The following notations are used for the status column:

m	mandatory - the capability is required to be supported.
o	optional - the capability may be supported or not.
n/a	not applicable - in the given context, it is impossible to use the capability.
x	prohibited (excluded) - there is a requirement not to use this capability in the given context.
o.i	qualified optional - for mutually exclusive or selectable options from a set. "i" is an integer which identifies a unique group of related optional items and the logic of their selection which is defined immediately following the table.
c.i	conditional - the requirement on the capability ("m", "o", "x" or "n/a") depends on the support of other optional or conditional items. "i" is an integer identifying a unique conditional status expression which is defined immediately following the table.
i	irrelevant (out-of-scope) - capability outside the scope of the reference specification. No answer is requested from the supplier.

NOTE: This use of "i" status is not to be confused with the suffix "i" to the "o" and "c" statuses above.

Support column

The support column shall be filled in by the supplier of the implementation using the following notations:

Y or y	supported by the implementation.
N or n	not supported by the implementation.
N/A or n/a	no answer required (allowed only if the status is n/a, directly or after evaluation of a conditional status).

4.2 Tooling

Message monitoring solutions, including audio recording and event logging, where supported, may be used to facilitate the resolution of any interoperability and/or performance issues that may be encountered during interoperability testing.

4.3 Test Description naming convention

Table 1: TD naming convention

TD <root> [gr] <nn>		
<root> = root applicability	BAS	Basic test
	ADV	Advanced test
[gr] = group	IVS	IVS eCall terminal
	PSAP	PSAP eCall server
		IVS or PSAP
<nn> = sequential number	01 to 99	Sequential numbers

4.4 Test Summary

The detailed test descriptions are defined in the clause 7. It is recommended to conduct all test cases supported by PSAP and IVS. Some of test cases require a fallback to CS (legacy) eCall. The interoperability test cases for CS domain are specified in ETSI TS 103 428 [9].

The test scenarios of the present document are split in 4 groups:

- 1) The basic scenarios, which shall be executed during all interoperability test sessions, covering the mandatory features of a NG eCall device (IVS and PSAP).
- 2) The advanced test scenarios, to do additional testing which goes beyond the basic test scenarios. These scenarios are focusing on IVS and PSAP features.
- 3) The advanced IVS test scenarios, to do additional testing which goes beyond the basic test scenarios. These scenarios are focusing only on IVS features.
- 4) The advanced PSAP test scenarios, to do additional testing which goes beyond the basic test scenarios. These scenarios are focusing only on PSAP features.

The basic test scenarios in Table 2 are foreseen to be executed during all interoperability test sessions, either with real IVS and PSAP, but also with testing devices simulating an IVS or a PSAP.

Table 2: Basic Tests

Test case ID	Title
TD_BAS_01	Initiation of manual eCall
TD_BAS_02	Initiation of automatic eCall
TD_BAS_03	Initiation of test eCall
TD_BAS_04	MSD transfer to PSAP supporting IMS eCall
TD_BAS_05	MSD transfer to PSAP supporting IMS eCall in roaming scenario
TD_BAS_06	PSAP initiated callback to IVS and MSD update
TD_BAS_07	PSAP initiated call clear-down
TD_BAS_08	IVS initiated call clear-down not allowed
TD_BAS_09	Verification of audio interfaces of IVS and PSAP
TD_BAS_10	MSD update on request from PSAP
TD_BAS_11	IVS behaviour after unsuccessful MSD update
TD_BAS_12	IVS behaviour after unacknowledged MSD update
TD_BAS_13	Format of encoded and decoded MSD in accordance with CEN EN 15722:2015 [10]
TD_BAS_14	MSD transfer via in-band modem to PSAP supporting IMS eCall

The advanced test scenarios in Tables 3, 4 and 5 are foreseen to do additional testing which goes beyond the basic test scenarios.

Table 3: Advanced Tests for PSAP and IVS

Test case ID	Title
TD_ADV_01	MSD transfer to PSAP supporting IMS eCall over IPv4
TD_ADV_02	MSD transfer to PSAP supporting IMS eCall over IPv6
TD_ADV_03	MSD transfer to PSAP supporting IMS eCall over IPv4(IVS)/IPv6(PSAP)
TD_ADV_04	MSD transfer to PSAP not supporting IMS eCall
TD_ADV_05	IMS eCall establishment with IMS emergency registration
TD_ADV_06	IMS eCall establishment without IMS emergency registration
TD_ADV_07	IMS eCall establishment without IMS emergency registration GIBA supported

Table 4: Advanced Tests for IVS

Test case ID	Title
TD_ADV_IVS_01	Fallback to legacy eCall following busy during call setup
TD_ADV_IVS_02	Fallback to legacy eCall following unavailable response during call setup
TD_ADV_IVS_03	Fallback to legacy eCall following no-answer during call setup
TD_ADV_IVS_04	Dropped eCall after MSD has been acknowledged
TD_ADV_IVS_05	Dropped eCall before call has been established
TD_ADV_IVS_06	IVS configured for 'eCall only' service (restricted)
TD_ADV_IVS_07	eCall is attempted when no networks are available (limited service condition with forbidden PLMN on SIM/USIM)
TD_ADV_IVS_08	MSD transfer to PSAP supporting IMS eCall via PLMN without VoIMS support
TD_ADV_IVS_09	Termination of manually triggered eCall by vehicle occupant
TD_ADV_IVS_10	Termination of automatically triggered eCall by vehicle occupant not allowed/not possible
TD_ADV_IVS_11	Ongoing eCall shall not be disconnected if new trigger is received

Table 5: Advanced Tests for PSAP

Test case ID	Title
TD_ADV_PSAP_01	PSAP handling of more than 1 eCall simultaneously
TD_ADV_PSAP_02	PSAP correct MSD additional data decoding
TD_ADV_PSAP_03	Rerouting to another PSAP/emergency control centre
TD_ADV_PSAP_04	PSAP operator user interface

5 Test Bed Architecture

5.1 Test site layout

The generic test bed used to carry out interoperability tests, is summarized in the below Figure 1.

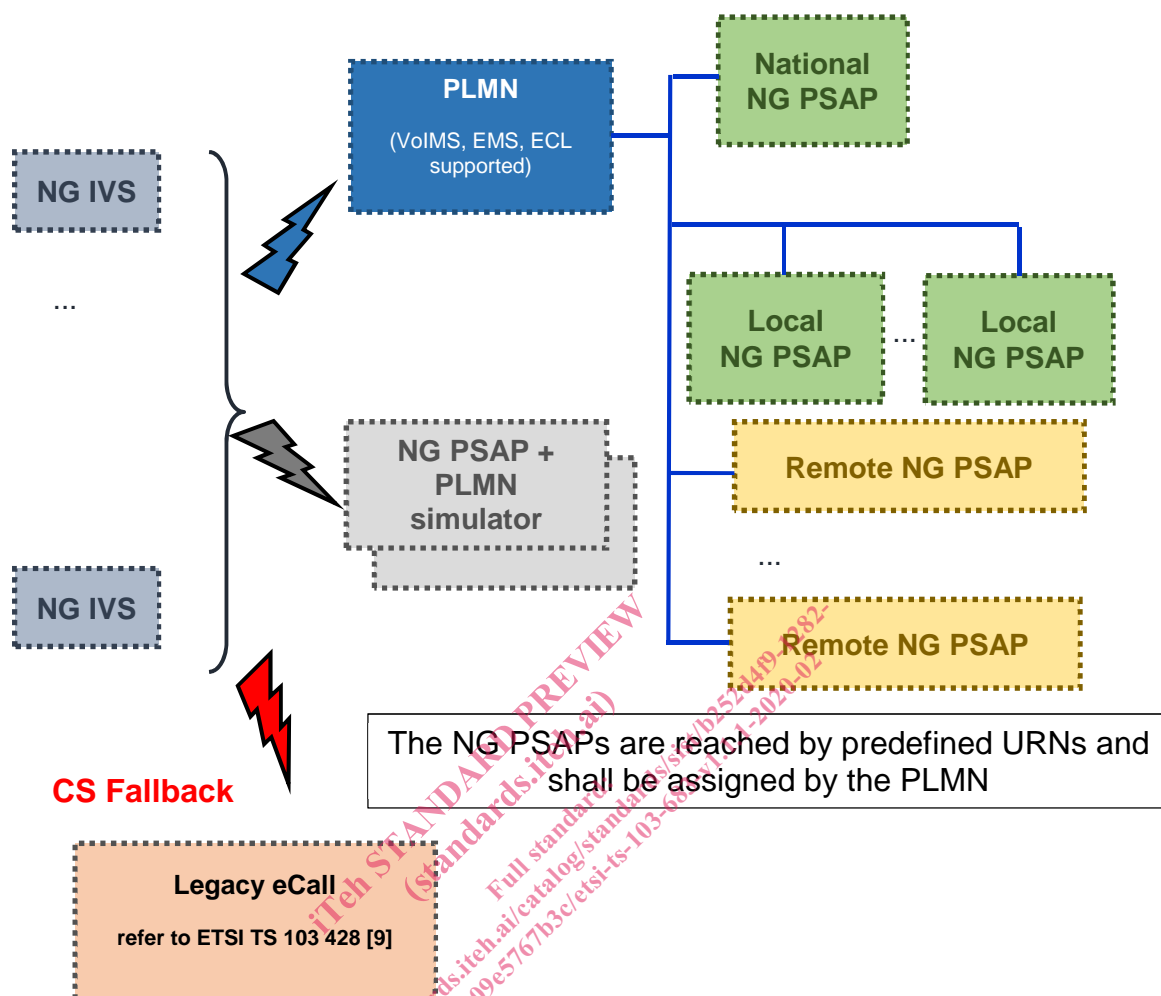


Figure 1: Architecture

In normal operation conditions, the NG IVS establishes an NG eCall via correct URN. This call setting is then interpreted by the mobile network (PLMN) as a requirement to connect the NG IVS with the most appropriate NG PSAP, able to handle NG eCalls, accordingly to CEN TS 17184:2018 [4].

However, during an NG eCall interoperability event, an NG IVS needs to be connected to a given NG PSAP in order to carry out pairing test sessions, following the test scenarios provided in the present document. The selection of the NG PSAP is therefore achieved by the use of the pre-defined URNs (see Table 6), if supported (configured) by the PLMN operator.

For the purpose of carrying out tests under real conditions, different options are available:

- Using test systems providing PLMN and NG PSAP simulation (connection in shielded cases or via cable).
- Using different non-standardized URNs, if the local authorities do not allow using the standardized URNs connections and thus reaching the real PSAP.