
**Information technology — Sensor
networks: Sensor Network Reference
Architecture (SNRA) —**

**Part 4:
Entity models**

iTeh STANDARD PREVIEW
*Technologies de l'information — Réseaux de capteurs: Architecture de
référence pour réseaux de capteurs —
(standards.iteh.ai)
Partie 4: Modèles des entités*

[ISO/IEC 29182-4:2013](https://standards.iso.org/iso/iec/29182-4-2013)

<https://standards.iteh.ai/catalog/standards/sist/d082073b-e870-40d3-8505-0b77fe85fdef/iso-iec-29182-4-2013>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 29182-4:2013](https://standards.iteh.ai/catalog/standards/sist/d082073b-e870-40d3-8505-0b77fe85fdef/iso-iec-29182-4-2013)

<https://standards.iteh.ai/catalog/standards/sist/d082073b-e870-40d3-8505-0b77fe85fdef/iso-iec-29182-4-2013>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	1
5 Overview	2
6 Physical entities	6
6.1 Sensor nodes	6
6.2 Gateways	10
6.3 Other networks	10
6.4 Service providers	10
6.5 Users	10
7 Functional entities	11
7.1 Sensor node hardware layer	11
7.2 Basic functions layer	11
7.3 Service layer	13
7.4 Application layer	16
7.5 Cross-layer management	17
Bibliography	22

<https://standards.iteh.ai/catalog/standards/sist/d082073b-e870-40d3-8505-0b77fe85fdef/iso-iec-29182-4-2013>
 (standards.iteh.ai)

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 29182 consists of the following parts, under the general title *Information technology — Sensor networks: Sensor Network Reference Architecture (SNRA)*:

- *Part 1: General overview and requirements*
- *Part 2: Vocabulary and terminology*
- *Part 3: Reference architecture views*
- *Part 4: Entity models*
- *Part 5: Interface definitions*
- *Part 7: Interoperability guidelines*

ITEH STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/d082073b-e870-40d3-8505-0b77fe85fdef/iso-iec-29182-4-2013>

The following part is under preparation:

- *Part 6: Applications*

Introduction

A wide range of applications has been proposed for sensor networks. In practice, however, sensor networks have been built and deployed for a relatively small number of applications. This is partly due to the lack of a business case for certain applications and partly due to technical challenges in building a non-trivial sensor network of reasonable complexity. The main reason for this impediment is the multi-disciplinary expertise – such as sensors, communications and networking, signal processing, electronics, computing, and cyber security – required to design a sensor network. Presently, the design process is so complex that one can leverage little from one sensor network design to another. It appears as if one has to start from almost scratch every time one wishes to design and deploy a sensor network. Yet, upon closer inspection, there are many commonalities in instantiations of sensor networks that realize various applications. These commonalities include similarities in the choice of network architecture and the entities/functional blocks that are used in the architecture.

The purpose of the ISO/IEC 29182 series is to

- provide guidance to facilitate the design and development of sensor networks,
- improve interoperability of sensor networks, and
- make sensor network components plug-and-play, so that it becomes fairly easy to add/remove sensor nodes to/from an existing sensor network.

The ISO/IEC 29182 series can be used by sensor network designers, software developers, system integrators, and service providers to meet customer requirements, including any applicable interoperability requirements.

The ISO/IEC 29182 series comprises seven parts. Brief descriptions of these parts are given next.

ISO/IEC 29182-1 provides a general overview and the requirements for the sensor network reference architecture.

ISO/IEC 29182-2 provides definitions for the terminology and vocabulary used in the reference architecture.

ISO/IEC 29182-3 presents the reference architecture from various viewpoints, such as business, operational, system, technical, functional, and logical views.

This part of ISO/IEC 29182 categorizes the entities comprising the reference architecture into two classes of physical and functional entities and presents models for the entities.

ISO/IEC 29182-5 provides detailed information on the interfaces among various entities in the reference architecture.

ISO/IEC 29182-6 provides detailed information on the development of International Standardized Profiles.

ISO/IEC 29182-7 provides design principles for the reference architecture that take the interoperability requirements into account.

There are no requirements for compliance in the ISO/IEC 29182 series. Users should ensure that the sensor nodes, and the related sensor network, are compliant with the application or deployment governing body.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC 29182-4:2013

<https://standards.iteh.ai/catalog/standards/sist/d082073b-e870-40d3-8505-0b77fe85fdef/iso-iec-29182-4-2013>

Information technology — Sensor networks: Sensor Network Reference Architecture (SNRA) —

Part 4: Entity models

1 Scope

This part of ISO/IEC 29182 presents models for the entities that enable sensor network applications and services according to the Sensor Network Reference Architecture (SNRA).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 29182-2, *Information technology — Sensor networks: Sensor Network Reference Architecture (SNRA) — Part 2: Vocabulary and terminology*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 29182-2 apply.

4 Abbreviated terms

3G	3rd Generation
4G	4th Generation
GNSS	Global Navigation Satellite System
GPS	Global Positioning System
ICT	Information and Communication Technology
IEEE	Institute of Electrical and Electronics Engineers
IP	Internet Protocol
IT	Information Technology
LBS	Location-Based Services
MAC	Medium Access Control
OSI	Open Systems Interconnection
PHY	Physical
PII	Personally Identifiable Information

QoS	Quality of Service
RF	Radio Frequency
RFID	Radio Frequency IDentification
SCM	Source Configuration Management
SDP	Service Discovery Protocol
SNRA	Sensor Network Reference Architecture
TEDS	Transducer Electronic Data Sheet

5 Overview

The purpose of this part of ISO/IEC 29182 is to provide basic information about and high-level models for various entities that comprise a sensor network. Entities can be roughly categorized into two classes, physical and functional. Physical entities are pieces of hardware and actual devices or components thereof that form the network, such as sensor nodes and gateways. For example, while a sensor node is a physical entity, so are any of the sensors in that node. A functional entity, on the other hand, represents a certain task that may be carried out on one or more types of physical entity. For example, data acquisition and collaborative information processing are both functional entities. While the former is carried out by the sensors, the latter is done “collaboratively” by sensor nodes, service providers, and users (or their machines, to be more precise). Routing and authentication are other examples of functional entities. More often than not, functional entities are pieces of code that run on physical entities.

Each entity model presented in this document is a description of the function/role of that entity. An attempt has been made to provide more detailed models for entities that are specific to sensor networks and typically not found in general-purpose communication networks. Examples of such physical entities include sensors and actuators. Similarly, more detailed models have been provided for functional entities such as data processing, self-localization, group management/clustering, collaborative information processing, and device management. A more detailed model may include an input-output relationship for what the entity does, some features of the entity that characterize its capabilities, and a taxonomy of various ways in which the entity may be implemented.

[Figures 1](#) and [2](#) provide an overall view of the entities modelled in this document. [Figure 1](#) is an amalgamation of Figure 3 in ISO/IEC 29182-1[1] and Figure 4 in ISO/IEC 29182-3[2]. It shows the physical entities that form a sensor network and how these entities are connected to each other. The blow-up part of the figure is borrowed from ISO/IEC 29182-3 and it shows the internal structure of a sensor node. It implies that actuator(s), although associated with sensor nodes, may not physically reside in sensor nodes. The rest of the figure comes from ISO/IEC 29182-1 and it depicts a more complex instantiation of a sensor network than the other cases presented in Figures 1 and 2 in ISO/IEC 29182-1. [Figure 2](#) is the same as Figure 7 in ISO/IEC 29182-3. It has been reproduced in this document for ease of reference.

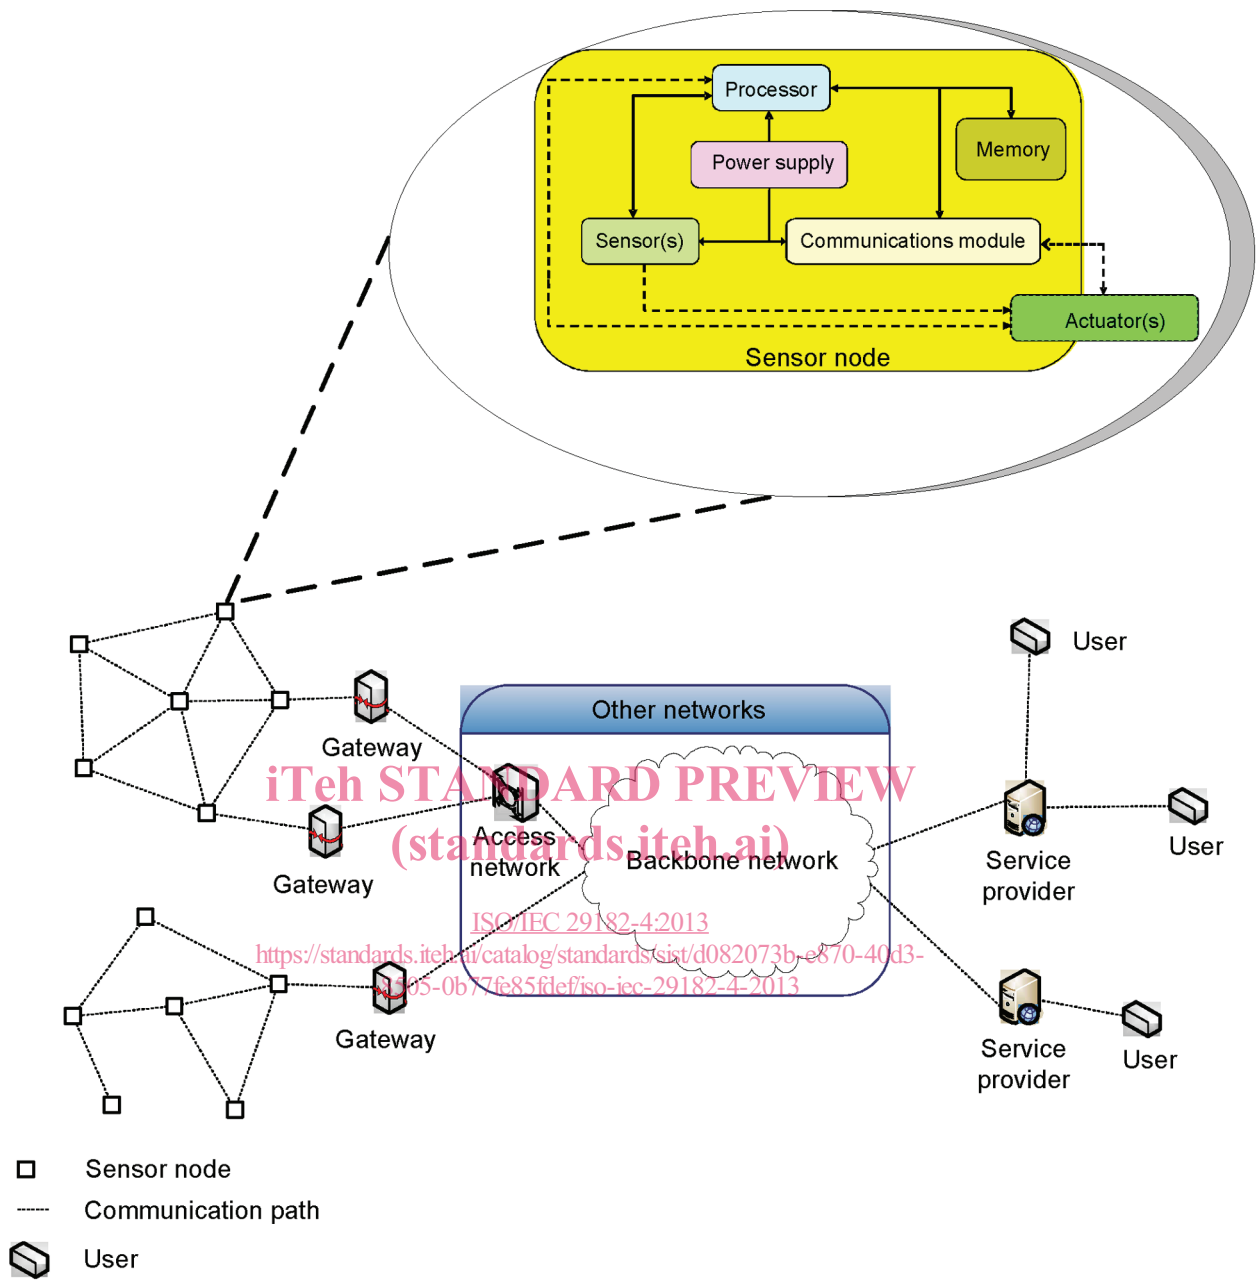


Figure 1 — Physical entities of a sensor network

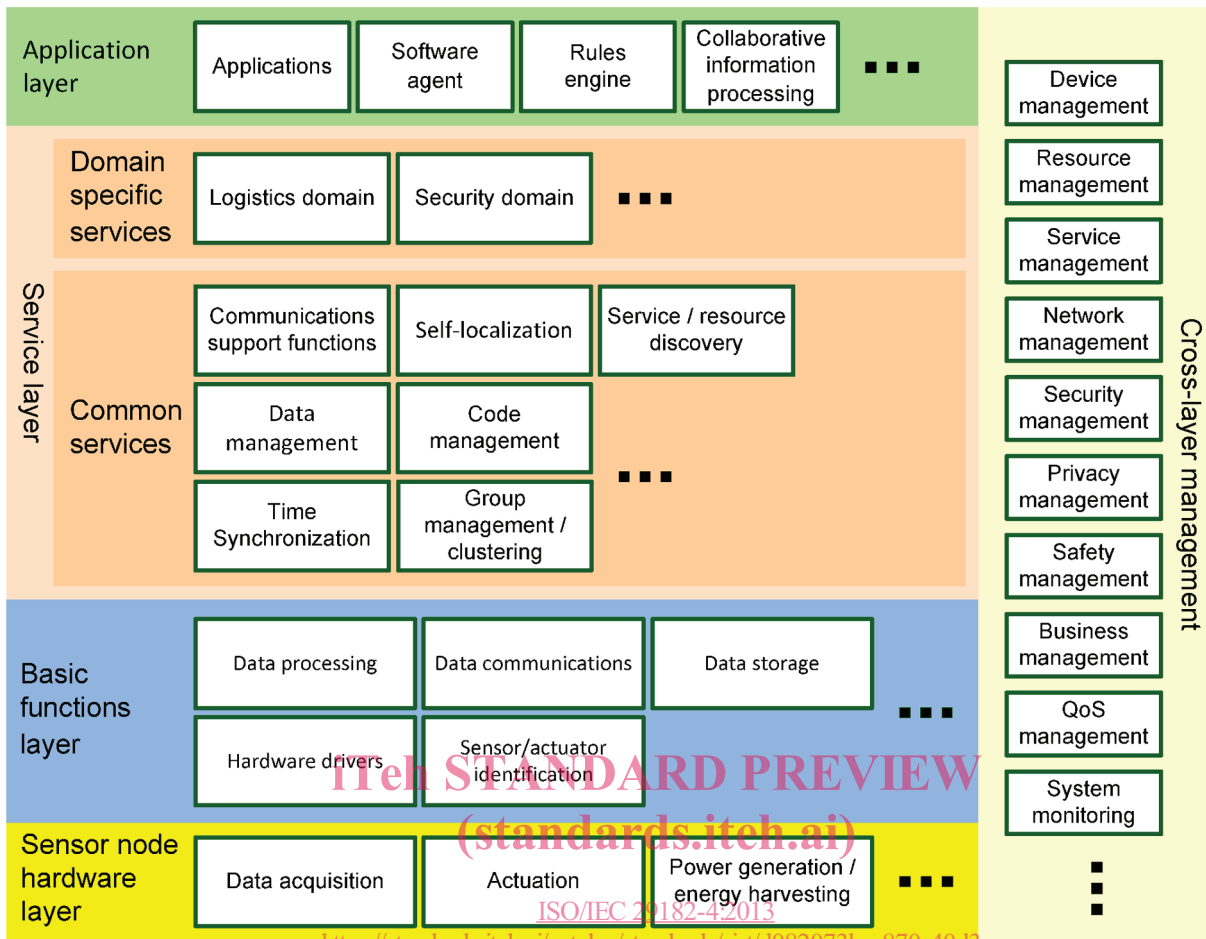


Figure 2 — Functional entities of a sensor network

The distinction between physical and functional entities in a sensor network and how they relate to each other can at times be confusing. Table 1 is an attempt to remedy this problem. It shows all the physical entities a functional entity could be associated with. The word “could” has been used here, because some physical entities may not be present in a given sensor network. For example, if there are no service providers in the overall architecture, which would be the case in a stand-alone sensor network, then one cannot say that there is an association between the collaborative information processing functional entity and service providers. In other words, the reader is urged to think of Table 1 as representative of certain possibilities, but not covering all possible ways of which entities might be present in the sensor network and how they might be configured.

Table 1 — Interrelationships between physical and functional entities in a sensor network

		Physical entities										
		Sensor nodes		Gateways	Other networks		Service providers	Users				
		Actuators	Sensors		Access networks	Backbone network						
Functional entities	Sensor node hardware layer	Data acquisition	•									
		Actuation		•								
		Power generation / energy harvesting				•						
	Basic func-tions layer	Data processing	•		•	•						
		Data communications		•			•	•	•	•	•	
		Data storage				•				•	•	
		Hardware drivers	•	•	•							
		Sensor/actuator identification	•	•	•							
	Service layer	Common services	Communications support functions		•	•	•		•	•	•	•
			Self-localization	•		•	•	•				
			Service/resource discovery			•					•	•
			Data management			•	•				•	•
			Code management			•	•		•		•	•
			Time synchronization			•	•				•	•
			Group management / clustering			•	•	•			•	
		Domain specific services			•					•		
	Application layer	Applications			•					•		
		Software agent			•		•			•	•	
		Rules engine			•					•	•	
		Collaborative information processing	•		•	•				•	•	
	Cross-layer management	Device management	•	•	•		•					
		Resource management	•	•	•	•	•			•	•	
		Service management								•	•	
		Network management			•	•	•			•	•	
		Security management			•	•	•		•	•	•	
		Privacy management										
		Safety management										
		Business management				•	•			•	•	
		QoS management	•	•	•	•	•		•		•	
System monitoring		•	•	•	•	•		•		•		

6 Physical entities

6.1 Sensor nodes

6.1.1 Overview

As it was stated earlier and depicted in the upper part of [Figure 1](#), a sensor node comprises several sub-entities whose models are presented next. Note that the actuator(s), if at all present, may not physically reside inside the sensor node.

6.1.2 Sensors

A sensor measures a physical attribute, such as temperature, humidity, or level of carbon monoxide in the air, and converts it into an electric voltage/current. This conversion may be direct or indirect. While in the former case the attribute is directly converted into an electric voltage/current, in the latter case the attribute is converted into a sequence of one or more intermediate attributes before finally getting converted into an electric voltage/current. For example, a thermometer may measure temperature and convert it into physical displacement of some object and then convert that displacement into an electric voltage/current. The sensor output voltage/current may be in analog or digital form. In the former case an analog to digital converter (ADC) is used to convert the analog electric voltage/current into a finite-length sequence of bits (binary digits) that constitutes a binary representation of the voltage/current.

Therefore, an appropriate model for a sensor with analog output is an input-output relationship that characterizes the conversion from the attribute being measured by the sensor into the output electric voltage/current. The relationship may occasionally be characterized through a mathematical formula or more frequently through a xy-plot. For example, [Figure 3](#) shows the output voltage of a temperature sensor versus the input temperature. As the temperature increases, the output voltage decreases, which is an indication of a negative temperature coefficient.

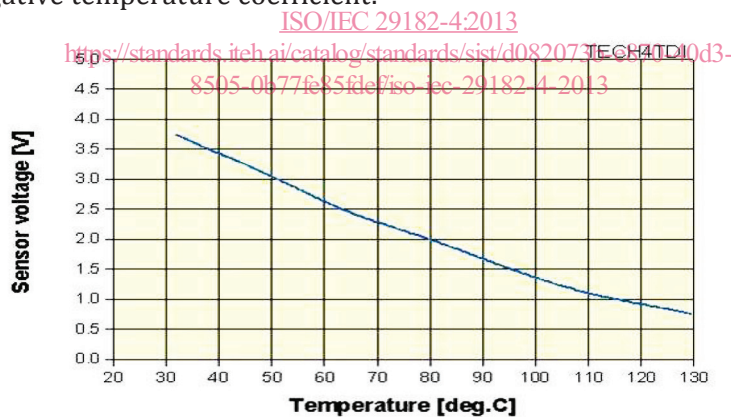


Figure 3 — Input-output relationship of a temperature sensor

On the other hand, an appropriate model for a sensor with digital output is a quantizer input-output plot or table. The former is a staircase xy-plot that represents the analog physical attribute on the horizontal axis and the analog value represented by the sensor binary output on the vertical axis. [Figure 4](#) shows a quantizer input-output plot.