



**Rail Telecommunications (RT);
Next Generation Communication System;
Radio performance simulations and
evaluations in rail environment;
Part 1: Long Term Evolution (LTE)**

Telecommunications (R)evolution 5G Generation Communication Standards Performance simulations Scenarios in rail environments Long Term Evolution (LTE)

Reference

RTR/RT-0051

Keywords

FRMCS, LTE, radio, railways, simulation

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
Executive summary	5
Introduction	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	7
3 Definition of terms, symbols and abbreviations.....	8
3.1 Terms.....	8
3.2 Symbols.....	8
3.3 Abbreviations	8
4 Assumptions and parameters for simulations and evaluations.....	10
4.1 Introduction	10
4.2 Simulation tools.....	10
4.3 Scenarios	11
4.4 Bandwidth and transmit power.....	12
4.4.1 Bandwidths	12
4.4.1.1 900 MHz band.....	12
4.4.1.2 1 900 MHz band.....	12
4.4.2 Transmit powers	13
4.4.2.1 900 MHz band.....	13
4.4.2.2 1 900 MHz band.....	13
4.5 Antenna diagrams.....	14
4.5.1 Antenna diagrams at the base station	14
4.5.1.1 For 900 MHz band	14
4.5.1.2 For 1 900 MHz band	14
4.5.2 Antenna diagrams at the UE	14
4.6 Radio propagation aspects.....	14
4.6.1 Radio propagation model.....	14
4.6.2 Conclusion	16
4.7 Frequency reuse scheme.....	16
4.8 Summary	16
4.9 Outcomes of the simulations	18
5 Simulation results	18
5.1 Results set 1.....	18
5.1.1 Description.....	18
5.1.2 Specific assumptions and parameters	20
5.1.2.0 Frequency reuse scheme	20
5.1.2.1 FDD 900 MHz band.....	20
5.1.2.2 TDD 1 900 MHz band.....	22
5.1.3 Results	22
5.1.3.1 Introduction.....	22
5.1.3.2 Results for 900 MHz band	23
5.1.3.2.1 Results at 1,4 MHz - First round	23
5.1.3.2.2 Results at 1,4 MHz - Second round.....	25
5.1.3.2.3 Results at 3 MHz	27
5.1.3.2.4 Results at 5 MHz	30
5.1.3.3 Results for 1 900 MHz band	34
5.1.4 Notes and remarks	40
5.1.4.1 Notes and remarks on first round of results (900 MHz band)	40

5.1.4.2	Notes and remarks on second round of results (900 MHz band)	41
5.1.4.3	Notes and remarks for results in 1 900 MHz band	43
5.2	Results set 2 (900 MHz band)	43
5.2.1	Description	43
5.2.1.1	Lab setup high level description	43
5.2.1.2	Lab setup: 3GPP RF Channel Emulator	44
5.2.1.3	Lab setup: FRMCS Traffic Generator and Analyser	45
5.2.2	Specific assumptions and parameters	45
5.2.3	Results	45
5.2.4	Notes and remarks	45
5.3	Results set 3 (900 MHz band)	45
5.3.1	Description	45
5.3.2	Specific assumptions and parameters	46
5.3.2.1	Common assumptions	46
5.3.2.2	Hilly channel model	47
5.3.2.3	Rural channel model	47
5.3.3	Results	49
5.3.3.1	Hilly channel model	49
5.3.3.2	Rural channel model	49
5.3.4	Notes and remarks	51
6	Results evaluation	52
6.1	Analysis at 900 MHz	52
6.1.1	General	52
6.1.2	Overhead analysis	52
6.1.2.1	General	52
6.1.2.2	IP stack, PDCP and RLC overhead	52
6.1.2.3	Physical layer overhead	53
6.1.2.4	Link-level comparison	53
6.1.3	Train speed impact	54
6.1.4	Neighbouring cells interference impact	56
6.1.5	HARQ impact estimation	56
6.1.6	Results comparison and <i>net throughputs</i> at hand-over point	58
6.2	Analysis at 1 900 MHz	59
6.2.1	Overhead analysis	59
6.2.2	Train speed impact	59
6.2.3	MIMO impact	60
6.2.4	<i>Net throughput</i> at cell edge	60
7	Conclusion	61
Annex A:	Theoretical peak throughput for LTE	63
Annex B:	Throughput curves for simulation results set 1	64
B.1	First round of simulations (900 MHz)	64
B.2	Second round of simulations (900 MHz)	73
Annex C:	Data Throughput Measurements for results set 3	121
Annex D:	Antenna diagrams	123
Annex E:	Propagation models	128
Annex F:	Change history	129
History	130

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Railway Telecommunications (RT).

The present document is part 1 of a multi-part deliverable covering radio performance simulations and evaluations in rail environment, as identified below:

Part 1: "Long Term Evolution (LTE)";

Part 2: "New Radio (NR)".

Modal verbs terminology

In the present document "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Executive summary

In order to assess 3GPP LTE radio performance in a rail environment, three scenarios have been defined: Rural, Hilly and Urban, representing various radio conditions typical to rail environment. Each scenario has been defined with its radio parameters, load condition and train speeds.

UIC and E-UIC spectrum bands have been assumed, with bandwidth of 1,4 MHz, 3 MHz and 5 MHz, corresponding to possible deployments with LTE and GSM-R co-existence and deployment with a standalone LTE.

Three different studies are described. One is based on simulation with a software chain tool using a Monte-Carlo statistical approach, including multiple cells in a linear deployment along the track. The two others are based on laboratory radio test bench, featuring hardware communication devices and wireless channel emulators, but not taking into account multiple cells interferences.

The present document includes results from software chain tool study and from one of the two laboratory radio test bench study.

The impact of using a TDD mode in other frequency bands will need to be added to the present document.

Introduction

3GPP LTE radio access is one candidate for the radio access technology to be used for the Future Rail Mobile Communications System (FRMCS). In the present document, the term FRMCS refers -unless stated otherwise- to the radio part of the communication system.

Radio performance evaluation of an LTE system could be done by simulation, through software and processing resources only, or through a test bench incorporating pieces of equipment emulating parts of the chain, e.g. the RF. In both cases, it is important to align the parameters and the assumptions made in the simulation and in the evaluation chain to be able to reflect better a deployment in a rail environment, and to better compare and understand the simulation and the evaluation results.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/ac9ae396-96aa-4c90-9218-4cd499a9adc4/etsi-tr-103-554-1-v1.3.1-2020-10>

1 Scope

The present document:

- Defines the simulation parameters relevant to rail environment relating to 3GPP LTE radio performance. This includes in particular operating frequency bands, bandwidths, deployment scenario (inter-site distance), and antenna characteristics, transmit powers and channel models, along with relevant metrics to be evaluated.
- Collects and analyse the simulation results of an LTE system in the rail environment operating in the 900 MHz frequency band (UIC and E-UIC bands).
- Collects and analyse the simulation results of an LTE system in the rail environment operating in a 1 900 MHz frequency band.
- Identifies limitations of an LTE system in the rail environment.

2 References

2.1 Normative references

Normative references are not applicable in the present document.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI TS 145 005 (V14.4.0) (04-2018): "Digital cellular telecommunications system (Phase 2+) (GSM); GSM/EDGE Radio transmission and reception (3GPP TS 45.005 version 14.4.0 Release 14)".
- [i.2] ETSI TS 136 104 (V14.7.0) (04-2018): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) radio transmission and reception (3GPP TS 36.104 version 14.7.0 Release 14)".
- [i.3] ETSI TS 136 101 (V14.7.0) (04-2018): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception (3GPP TS 36.101 version 14.7.0 Release 14)".
- [i.4] Recommendation ITU-R M.2135-1 (12-2009): "Guidelines for evaluation of radio interface technologies for IMT advanced".
- [i.5] IST-4-027756 Winner II D1.1.2 V1.2 Winner II Part I: "Channel Models", European Commission, Deliverable IST-WINNER D.
- [i.6] Ikuno, J. Colom, Martin Wrulich, and Markus Rupp.: "Performance and modelling of LTE H-ARQ." Proc. International ITG Workshop on Smart Antennas (WSA 2009), Berlin, Germany, 2009.
- [i.7] ETSI TS 136 211 (V14.6.0) (04-2018): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Physical channels and modulation (3GPP TS 36.211 version 14.6.0 Release 14)".

- [i.8] Recommendation ITU-R M.1225 (1997): "Guidelines for evaluation of radio transmission technologies for IMT-2000".
- [i.9] European Integrated Railway Radio Enhanced Network System Requirements Specification, UIC CODE 951, GSM-R Operators Group, December 2015.
- [i.10] ETSI TR 145 050 (V15.0.0) (07-2018): "Digital cellular telecommunications system (Phase 2+) (GSM); GSM/EDGE Background for Radio Frequency (RF) requirements (3GPP TR 45.050 version 15.0.0 Release 15)".
- [i.11] Kapsch CarrierCom: "Power limitations in the extension part of the ER-GSM band", Contribution to CEPT FM56(17)047, December 2017.
- NOTE: Available at https://cept.org/Documents/fm-56/39947/fm56-17-047_power-limitations-in-the-extension-part-of-the-er-gsm-band.
- [i.12] Loïc Brunel, Hervé Bonneville, Akl Charaf and Émilie Masson: "System-Level Evaluation of Next-Generation Radio Communication System for Train Operation Services", Proceedings of 7th Transport Research Arena TRA 2018, April 16-19, 2018.
- [i.13] ECC PT1(19)131: "FRMCS deployment parameters to be used in SE7 studies".

3 Definition of terms, symbols and abbreviations

3.1 Terms

Void.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

λ wavelength

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACS	Adjacent Channel Selectivity
AMC	Adaptive Modulation and Coding
AWGN	Additive White Gaussian Noise
BS	Base Station
BTS	Base Transceiver Station
BW	BandWidth
CDF	Cumulative Distribution Function
CDL	Clustered Delay Line
CoMP	Coordinated Multi Point
COST	Cooperation of Scientific and Technical
CP	Cyclic Prefix
DL	Down Link
ECC	European electronic Communications Committee
EIRENE	European Integrated Railway radio Enhanced Network
EIRP	Effective Isotropic Radiated Power
eNB	evolved Node B
ETU	Extended Typical Urban model
E-UTRA	Evolved UMTS Terrestrial Radio Access
FDD	Frequency Division Duplex
FEC	Forward Error Correction
FRMCS	Future Rail Mobile Communications System

FSTD	Frequency Switched Transmit Diversity
GSM	Global System for Mobile communications
GSM-R	Global System for Mobile communication for Railway application
HARQ	Hybrid Automatic Repeat-Request
HO	Hand Over
HST	High Speed Train
ICIC	Inter-Cell Interference Coordination
IMT	International Mobile Telecommunications
IP	Internet Protocol
ISD	Inter Site Distance
ISI	Inter-Symbol Interference
ITU-R	International Telecommunication Union - Radio communication sector
LOS	Line Of Sight
LTE	Long Term Evolution
MAC	Media Access Control
MCS	Modulation and Coding Scheme
MIMO	Multiple Input, Multiple Output
MISO	Multiple Input, Single Output
MOS	Mean Opinion Score
MRS	Mobile Relay Station
NLOS	Non Line Of Sight
NR	New Radio
OFDM	Orthogonal Frequency Division Multiplexing
PBCH	Physical Broadcast Channel
PDCCH	Physical Downlink Control Channel
PDCP	Packet Data Convergence Protocol
PDP	Power Delay Profile
PER	Packet Error Rate
PHY	PHYsical layer
PUCCH	Physical Uplink Control Channel
QAM	Quadrature Amplitude Modulation
QCI	QoS Class Identifier
RB	Resource Block
REC	Railways Emergency Call
RF	Radio Frequency
RLC	Radio Link Control
RT	Rail Telecommunications
SFBC	Space-Frequency Block Coding
SGW	Serving Gateway
SIMO	Single Input, Multiple Output
SINR	Signal to Interference-plus-Noise Ratio
SISO	Single Input, Single Output
SNR	Signal to Noise Ratio
SRS	System Requirement Specification
SSF	Special Sub-Frame
TCP	Transmission Control Protocol
TDD	Time Duplex Division
TRX	Transmitter/Receiver
UDP	User Datagram Protocol
UE	User Equipment
UIC	Union Internationale des Chemins de fer
UL	Up Link
UMTS	Universal Mobile Telecommunications System
USB	Universal Serial Bus

4 Assumptions and parameters for simulations and evaluations

4.1 Introduction

In the scope of the present document, the following points are addressed:

- Simulations take into account railway specifics.
- Simulations are flexible in order to simulate different system configurations, parameter settings and scenarios.
- Consideration of different carrier band-widths (at least 1,4 MHz, 3 MHz and 5 MHz for 900 MHz band, 10 MHz for 1 900 MHz band).
- Consideration of TDD (for 1 900 MHz band) and FDD (for 900 MHz band) duplex modes.
- Consideration of different subscriber and train densities and distributions.
- Consideration of FRMCS system parameters (e.g. Cyclic Prefix).
- Different power classes of FRMCS equipment.
- Different antenna radiation patterns and tilts.
- SISO, SIMO, MISO und MIMO.
- Different installation heights of antennas.
- Different distances and densities of fixed transmitter equipment (eNB).
- Different specified and appropriate coding and modulation schemes.
- Different 3GPP Releases (e.g. LTE: ≥ 13) to take into account new features, e.g. performance improvements for high speed.

4.2 Simulation tools

Software simulations are made at radio level, i.e. above the physical layer as depicted in Figure 1. Overhead like pilots and cyclic prefixes are taken in to account, but not the overhead that are added by layers above PHY, in particular PDCP and IP headers.

Other simulations, e.g. hardware simulations and laboratory tests, could have a reference point at application level.

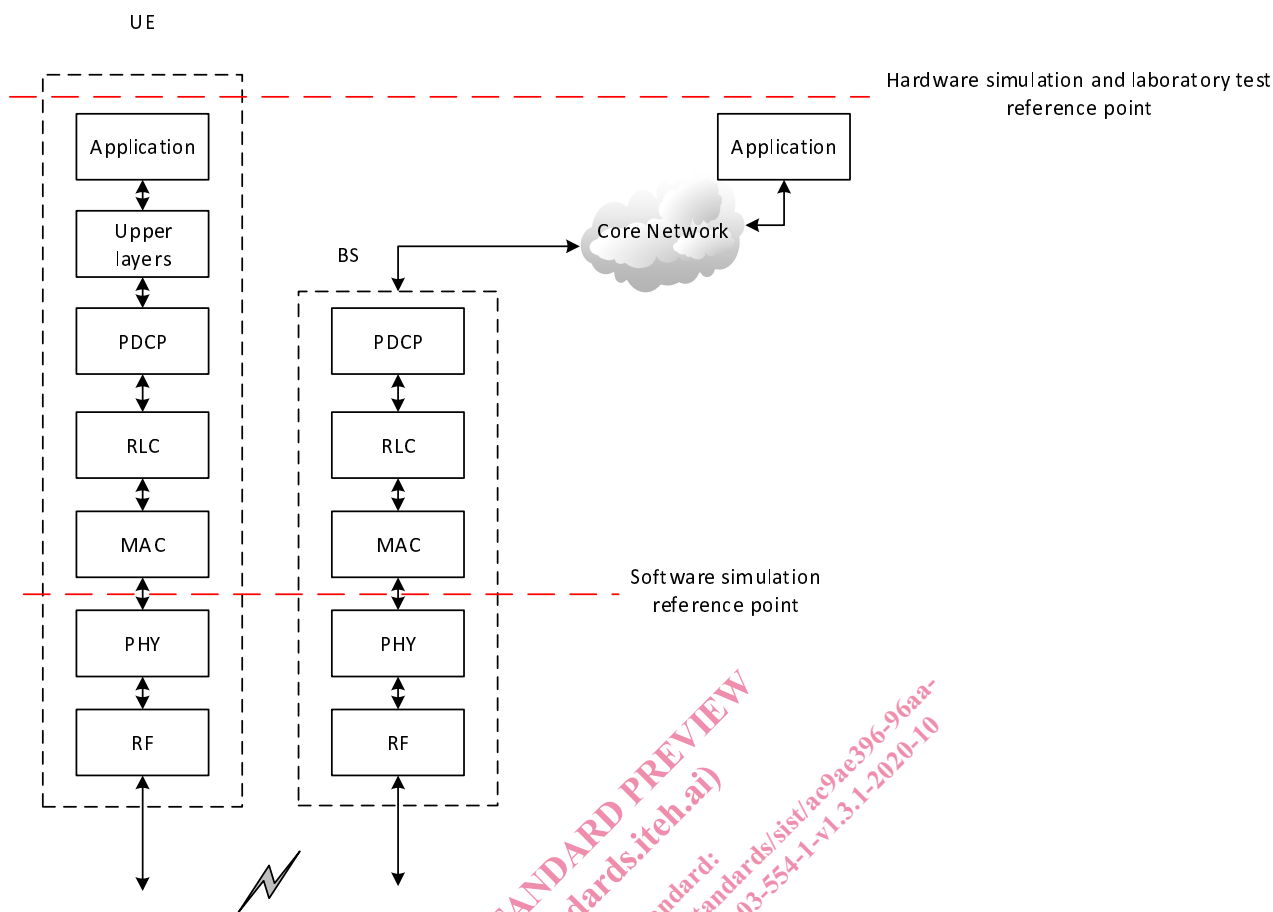


Figure 1: Reference point for the software simulations

4.3 Scenarios

The objective is to define the minimum number of scenarios which cover the majority of the radio environment.

Three scenarios have been retained: Urban, Rural, and Hilly. Urban is relative to areas where train density is high, but move at moderate speed. Rural scenario typically intends to model high speed lines. Hilly scenario intends to handle more complex situations from radio propagation point of view, with in particular extensive multi-path propagation.

Tunnels are complex scenarios, since they depend widely on tunnel shape and tunnel/train relative geometry. They are not considered in the present document as they would require a more long and thorough work.

Only train-ground communications are considered in the present document. Handset or shunting area scenarios are for further study.

Whether it is possible to have several antennas on trains roof tops and what could be their characteristic needs further discussions.

4.4 Bandwidth and transmit power

4.4.1 Bandwidths

4.4.1.1 900 MHz band

The band is operated in FDD. Three scenarios are considered on bandwidths of 1,4 MHz, 3 MHz and 5 MHz in the UIC and E-UIC bands, as depicted in Figure 2:

- 1) Scenario 1 considers GSM-R in UIC band as per today, with the addition of a 1,4 MHz LTE carrier in the upper part of E-UIC band. This scenario corresponds to a migration phase, with co-existence of both GSM-R and LTE systems.
- 2) Scenario 2 is an extension of scenario 1 with an LTE carrier extended to 3 MHz in the E-UIC band.
- 3) Scenario 3 assumes a deployment with no GSM-R and one LTE 5 MHz carrier in UIC band, overlapping the E-UIC band.

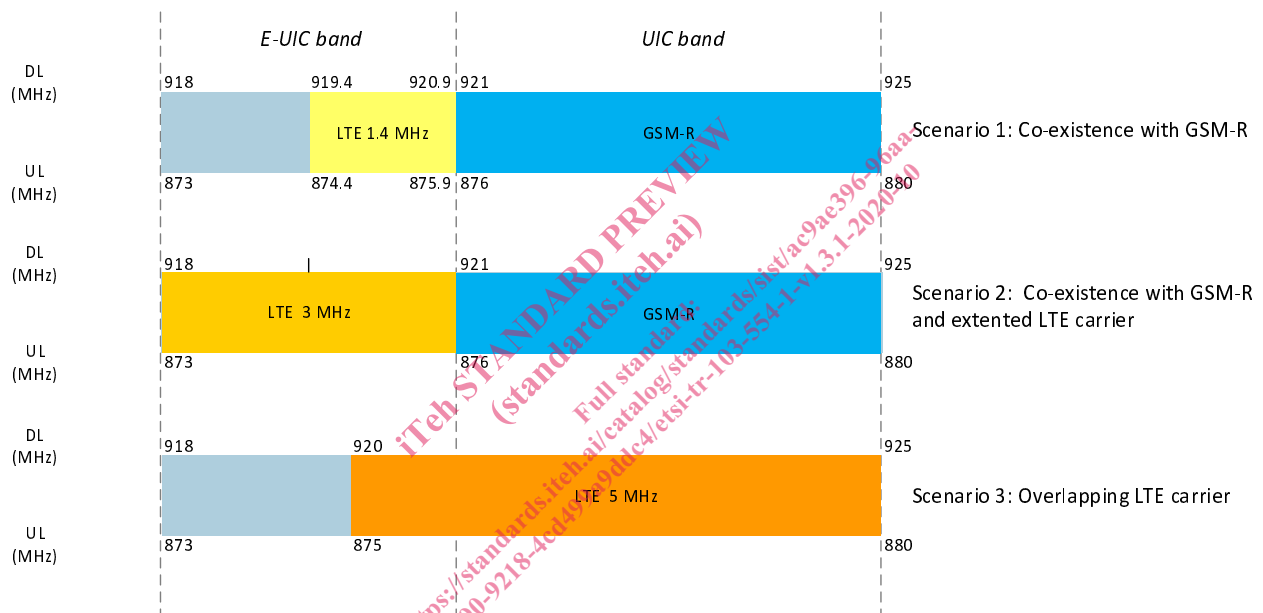


Figure 2: Carriers and bandwidths in the deployment scenarios considered

4.4.1.2 1 900 MHz band

The band is operated in TDD, with 10 MHz channel bandwidth within 1 900 MHz - 1 910 MHz frequency range.

In LTE Release 8, seven TDD configurations are specified (Table 1). Two of them are selected for the study:

- Configuration 1: providing 4 uplink subframes, 4 downlink subframes and two special subframes. This configuration is designated as 50 %/50 % (UL, DL).
- Configuration 0: providing 6 uplink subframes, 2 downlink subframes and two special subframes. This configuration is designated as 75 %/25 % (UL, DL).

The above percentage are just an indication while actual percentages of UL, DL depend on the special subframe configuration and the associated overhead (see clause 6.2.2).

Table 1: UL/DL frame configuration in LTE Rel.8 [i.7]

Configurati on	3GPP relea se	Downlink to uplink switch point periodicity (ms)	Subframe number										Number of subframes / frame		
			0	1	2	3	4	5	6	7	8	9	DL	U L	SS F
0	8	5	D	S	U	U	U	D	S	U	U	U	2	6	2
1	8	5	D	S	U	U	D	D	S	U	U	D	4	4	2
2	8	5	D	S	U	D	D	D	S	U	D	D	6	2	2
3	8	10	D	S	U	U	U	D	D	D	D	D	6	3	1
4	8	10	D	S	U	U	D	D	D	D	D	D	7	2	1
5	8	10	D	S	U	D	D	D	D	D	D	D	8	1	1
6	8	5	D	S	U	U	U	D	S	U	U	D	3	5	2

Dynamic TDD extensions introduced in later LTE releases are not considered.

However, the commercial availability of LTE chipsets with support of configuration 0 could be limited, due for example of lack of conformance testing.

4.4.2 Transmit powers

4.4.2.1 900 MHz band

Transmit power in the E-UIC band is subject to limitations in case of FRMCS system deployment uncoordinated with commercial systems operating in neighbouring bands.

The method to compute the maximum transmit power derives the impact from the adjacent channel selectivity related specifications (wideband blocking and narrow band blocking), takes into account applicable effects (0,8 dB desensitization, slope of the filtering, etc.) as well as corrections resulting from spurious emissions from base station transmission and from UE. Power limitations and ACS (Adjacent Channel Selectivity) have been found as not relevant for the present document.

Summary of the acceptable maximum transmit power of a FRMCS system in case of uncoordinated deployment is shown in Table 2.

Table 2: FRMCS acceptable transmitted power at eNB connector taking into account impact of BS Tx spurious emissions and Noise Rise from UE

FRMCS 1,4 MHz channel centre frequency (MHz)	918,7			920,3		
Standard under consideration in adjacent bands	UMTS	LTE	Multi-Standard	UMTS	LTE	Multi-Standard
FRMCS acceptable Tx power (dBm)	24,2	22,2	22,2	48,8	45,8	48,8

In coordinated scenario, the maximum transmit power at 918,7 MHz can be the same than at 920,3 MHz.

More detailed information can be found in [i.11].

4.4.2.2 1 900 MHz band

Conversely to 900 MHz band, where the transmit power limitation is defined at the base station antenna connector, transmit power limitation in the 1 900 MHz band is defined through base station EIRP.

BTS EIRP 1 900 MHz: 40 dBm and 63 dBm (incl. feeder losses and antenna gain).