

DRAFT INTERNATIONAL STANDARD

ISO/DIS 10110-1

ISO/TC 172/SC 1

Secretariat: DIN

Voting begins on:
2018-05-23

Voting terminates on:
2018-08-15

Optics and photonics — Preparation of drawings for optical elements and systems —

Part 1: General

*Optique et photonique — Indications sur les dessins pour éléments et systèmes optiques —
Partie 1: Généralités*

ICS: 01.100.20; 37.020

ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/77b89b4-94ff-42fc-a8d1-42369e82c883/iso-10110-1-2019>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.



Reference number
ISO/DIS 10110-1:2018(E)

© ISO 2018

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/77b89b4-94ff-42fc-a8d1-42369e82c883/iso-10110-1-2019>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Fundamental stipulations	2
5 Presentation and dimensioning	3
5.1 Drawing format.....	3
5.1.1 General.....	3
5.1.2 Drawing field.....	3
5.1.3 Table field.....	4
5.1.4 Title field.....	5
5.1.5 Alternative drawing layout.....	5
5.1.6 Examples.....	5
5.2 Views.....	7
5.3 Global and Local Coordinate Systems.....	9
5.4 Axes.....	10
5.5 Leader lines.....	11
5.6 Test regions.....	11
5.7 Test volumes.....	12
5.8 Dimensioning.....	13
5.8.1 General.....	13
5.8.2 Radius of curvature.....	14
5.8.3 Thickness.....	15
5.8.4 Diameter.....	15
5.8.5 Presentation of shapes of edges, bevels and chamfers.....	16
5.8.6 Linear dimensions.....	18
5.8.7 Angles.....	19
5.8.8 Special surfaces.....	20
5.9 Material specification.....	20
5.10 Indication of tolerances and various properties.....	21
5.10.1 Tolerances for linear and angular dimensions.....	21
5.10.2 Tolerances for the position of the local coordinate systems.....	21
5.10.3 Optical properties and tolerances.....	21
5.10.4 Optical subassembly.....	22
6 Additional indications for optical layout drawings	23
6.1 General.....	23
6.2 Axial separations.....	24
6.2.1 General.....	24
6.2.2 Fixed axial separations.....	24
6.2.3 Adjustable axial separations.....	25
6.2.4 Variable axial separations.....	25
6.3 Images, pupils, field stops and other apertures.....	26
Annex A (informative) Examples of drawings of optical elements	28
Bibliography	45

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 172, *Optics and photonics*, Subcommittee SC 1, *Fundamental standards*.

This third edition cancels and replaces ISO 10110-1:2006 and ISO 10110-10:2004, which have been technically revised and merged into one single document.

The main changes to the document include:

- a) Drawing scale and the reference wavelength are required to be included on the drawing;
- b) provisions have been added to allow coordinate systems to be defined for each surface and for the part as a whole;
- c) new tabular formats have been added to allow more surfaces on a tabular drawing, partially tabulated drawings, and new types of assembly drawings;
- d) a new notation for special surfaces has been added;
- e) in addition, many more examples of drawings and notations have been provided;
- f) and various detailed notes have been added, and corrections and modifications have been made for improved clarity.

A list of all parts in the ISO 10110- series can be found on the ISO website.

Optics and photonics — Preparation of drawings for optical elements and systems —

Part 1: General

1 Scope

This document specifies the general layout of drawings and provides examples of indications in the ISO 10110- series, which standardizes drawing indications for optical elements and systems.

This document specifies the presentation in drawings of the characteristics, including the tolerances, of optical elements and systems. This document also includes the popular tabular format, formerly presented in ISO 10110-10. This tabular format, now described in 5.1, is the preferred format for ISO 10110 drawings.

Rules for preparation of technical drawings as well as for dimensioning and tolerancing are given in various ISO Standards. These general standards apply to optical elements and systems only if the necessary rules are not given in the various parts of ISO 10110.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 128-24, *Technical drawings — General principles of presentation — Part 24: Lines on mechanical engineering drawings*

ISO 406, *Technical drawings — Tolerancing of linear and angular dimensions*

ISO 7944, *Optics and optical instruments — Reference wavelengths*

ISO 8015, *Geometrical product specifications (GPS) — Fundamentals — Concepts, principles and rules*

ISO 10110-2¹⁾, *Optics and optical instruments — Preparation of drawings for optical elements and systems — Part 2: Material imperfections — Stress birefringence*

ISO 10110-3¹⁾, *Optics and optical instruments — Preparation of drawings for optical elements and systems — Part 3: Material imperfections — Bubbles and inclusions*

ISO 10110-4¹⁾, *Optics and optical instruments — Preparation of drawings for optical elements and systems — Part 4: Material imperfections — Inhomogeneity and striae*

ISO 10110-5, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 5: Surface form tolerances*

ISO 10110-6, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 6: Centring tolerances*

ISO 10110-7, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 7: Surface imperfections*

1) ISO 10110-2, ISO 10110-3, and ISO 10110-4 are to be withdrawn and replaced by ISO 10110-18.

ISO 10110-8, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 8: Surface texture; roughness and waviness*

ISO 10110-9, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 9: Surface treatment and coating*

ISO 10110-11, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 11: Non-toleranced data*

ISO 10110-12, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 12: Aspheric surfaces*

ISO 10110-14, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 14: Wavefront deformation tolerance*

ISO 10110-17, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 17: Laser irradiation damage threshold*

ISO 10110-18, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 18: Stress birefringence, bubbles and inclusions, homogeneity, and striae*

ISO 10110-19, *Optics and photonics — Preparation of drawings for optical elements and systems — Part 19: General description of surfaces and components*

ISO 12123, *Optics and photonics — Specification of raw optical glass*

ISO 13715, *Technical product documentation — Edges of undefined shape — Indication and dimensioning*

ISO 80000-1, *Quantities and units — Part 1: General*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Fundamental stipulations

All indications in drawings for optical elements and systems shall apply to the finished optical component or assembly, i.e., to its final form as described on the drawing, except where other parts of ISO 10110 stipulate otherwise or if explicitly stated on the drawing.

Whenever details or symbols specified in this document are found to be inadequate to clearly define the requirement, the information should be supplemented by a note or special instruction (see 5.1.2).

All linear dimensions are in millimetres, unless otherwise stated.

All units shall be shown using either a decimal comma or a decimal point, in accordance with ISO 80000-1. One or the other format should be used; the two conventions shall not be mixed on one drawing. Delimiters for the thousands place shall never be used, regardless of the decimal format.

All optical and dimensional data refer to the reference temperature of 20 °C²⁾, unless specified otherwise.

2) 20 °C is the reference temperature in accordance with ISO 1. In the 1996 edition of ISO 10110-1, the default value for the reference temperature was 22 °C.

Unless specified elsewhere, the omission of a permissible deviation or material imperfection from the drawing shall indicate that the provisions of ISO 10110-11 apply.

Surface form and transmitted wavefront error shall be specified in units of nanometers or, if preferred, micrometers or fringe spacings. Because of the existence of older (national) standards for optical drawings, a possibility of incorrect interpretation of data exists. For this reason, a reference to ISO 10110 shall appear on each drawing. In addition, as described in ISO 7944, wavelengths other than e-line or d-line may be used as the reference wavelength. Therefore if waves or fringe spacings are used, the reference wavelength shall always be indicated³⁾. For example:

"Indications in accordance with ISO 10110; $\lambda = 546,07 \text{ nm}$ "

or

"Ind. acc. ISO 10110; $\lambda = 632,8 \text{ nm}$ "

These indications should preferably be associated with the title of the drawing (see [Annex A](#) as well as [Figures 1](#) and [2](#)).

While it is preferred to only use one wavelength in an optical element drawing, the usage of other wavelengths is permitted, e.g. 546,07 nm in general but indicating a different wavelength for refractive index and Abbe number (n_e , v_d , etc.). In those cases, the different wavelength strictly applies only to the material property indicated with the different wavelength. Any other value not separately indicated shall be considered using the general wavelength.

NOTE For legacy drawings created prior to the publication of this revision, the default wavelength was 546,07 nm.

5 Presentation and dimensioning

5.1 Drawing format

5.1.1 General

The preferred layout of a drawing of optical elements or subassemblies is the tabular format. It was originally described in ISO 10110-10, but has been incorporated here for ease of use. All of the rules regarding line type, notation and symbology given below apply to drawings in a tabular format, unless they are explicitly contradicted by this part of the standard.

The tabulated drawing shall consist of the following three fields (see [Figures 1](#) and [2](#) for sample layouts):

- drawing field in accordance with [5.1.2](#);
- table field in accordance with [5.1.3](#);
- title field in accordance with [5.1.4](#).

5.1.2 Drawing field

In this field, a schematic drawing of the optical element (e.g. lens, mirror, or prism) or cemented assembly shall be given, together with all information not given in the table field. A drawing scale shall be indicated and the drawing shall be a true-to-scale technical drawing.

It is sometimes desirable to exaggerate the surface deviations for non-spherical surfaces for clarity. If this is desired, a separate inset drawing not-to-scale is permitted. It shall be indicated that the inset drawing is not-to-scale; e.g. by giving an exaggeration factor along the z-axis.

3) In earlier editions of ISO 10110-1, the default value for the reference wave length was 546,07 nm.

The definition of a local coordinate system for each surface is possible. In this case, for every surface on the drawing the coordinate system shall be indicated in the Table field. Centring tolerances and (if applicable) the datum axis for centring specification shall be indicated on the drawing as applicable per ISO 10110-6. Additionally, the surface texture specification (see ISO 10110-8) may be shown either in the drawing or the table field.

Notes, instructions and additional information are allowed within the drawing field using a leader line, or may be numbered and tabulated, with a notes table placed in the drawing field in any convenient location. Each note shall have a number for ease of reference.

5.1.3 Table field

This field contains dimensions, tolerances, surface treatment and coating references, permissible material imperfections of the optical element or cemented assembly, and local coordinate system references, if any. The table field is subdivided into subfields.

The number and contents of the subfields depend on the type of component or assembly being specified. Whenever possible, the table subfields should follow the path of the light. [Table 1](#) lists detailed descriptions of the properties which may be indicated. In the event that the local coordinate system for each surface is provided, it shall be directly below the surface label. See [Clause 5.3](#) for more information and [Figures A.16](#) and [A.17](#) for examples of local coordinates.

- a) In the case of a single element with two optical surfaces:
- the left subfield refers to the left surface (or, if desired, surface 1) of the optical element;
 - the central subfield refers to the material specification;
 - the right subfield refers to the right surface (or, if desired surface 2) of the optical element.

See [Figures A.1, A.2, A.3](#) and [A.4](#).

- b) In the case of a single element with three or more optical surfaces:
- each surface subfield (e.g. A1, A2, etc.) shall be labelled, and the surface indicated in the drawing;
 - the subfield labelled “Material” shall be for the material specifications;
 - the subfields can be horizontally or vertically aligned;
 - whenever possible, the table subfields should follow the path of the light.

See [Figures A.5, A.6, A.7](#) and [A.8](#).

- c) In the case of a cemented assembly:
- the minimum number of subfields equals the number of surfaces;
 - additional subfields may be included which identify the element information such as element number, drawing number, or part number, either in the same row as the surface subfields or above the surface subfields. For clarity, a label for these additional subfields is recommended;
 - cemented or contacted surfaces are counted as one surface, and information about the interface such as tolerances on the thickness and wedge of the cement or contact area may be given in the surface field.

See [Figures A.9](#) and [A.10](#).

- d) In the case of a cemented assembly without individual element drawings; fully tabulated:
- the number of subfields depends upon the number of elements;
 - each element has a subfield for a left surface, a material, and a right surface;

- each interface between elements has a subfield where information about the interface such as tolerances on the thickness and wedge of the cement or contact area are shown.

See [Figure A.11](#).

- e) In the case of a cemented assembly without individual element drawings; partially tabulated:
- the number of subfields depends upon the number of elements;
 - each element has a subfield for a left surface and a right surface;
 - each interface between elements has a subfield where information about the interface such as tolerances on the thickness and wedge of the cement or contact area are shown;
 - the materials tolerances are indicated with a leader line in the drawing field.

See [Figure A.12](#).

- f) In the case of a system (e.g. an assembly with air spaces) with individual element drawings; partially tabulated:
- the number of subfields depends upon the number of elements;
 - an additional table of system attributes may also be shown.

See [Figure 36](#).

5.1.4 Title field

This field is provided for general indications. This shall include a reference to ISO 10110, the general wavelength, and other indications such as name, type and/or reference number of the optical element or cemented assembly, part number, designer and/or approver's name, and company name and logo, if desired.

5.1.5 Alternative drawing layout

While the tabular format is preferred, it is not required. An alternative layout is allowed which has only a drawing field and a title field. In this case, all surface and materials tolerances are indicated in the drawing field with leader lines to the appropriate material or surface.

See [Figures A.13, A.14](#) and A.15.

5.1.6 Examples

[Annex A](#) gives examples of indications for optical elements and cemented assemblies.



<p><i>Drawing field</i> <i>Contents in accordance with 5.1.2</i></p> <p><i>Table field</i> <i>Contents in accordance with 5.1.3</i></p> <p>↙ ↓ ↘</p>		
Surface 1	Material specification	Surface 2
R \emptyset_e Protective chamfer λ 3/ 4/ 5/  6/	n v 0/ 1/ 2/	R \emptyset_e Protective chamfer λ 3/ 4/ 5/  6/
<p>Indications in accordance with ISO 10110</p> <p><i>Title field</i> <i>Indications in accordance with 5.1.4</i> $\lambda = 633 \text{ nm}$</p>		

Figure 1 — Tabular indication of data for a single element

<p style="text-align: center;"><i>Drawing field</i> Contents in accordance with 5.1.2</p> <p style="text-align: center;"><i>Table field</i> Contents in accordance with 5.1.3</p> <p style="text-align: center;">↙ ↘ ↙ ↘</p>			
Surface 1	Surface 2	Surface 3	Surface 4
\varnothing_e λ 4/ 6/	\varnothing_e λ 4/ 6/ Cement:	\varnothing_e λ 4/ 6/ Cement:	\varnothing_e λ 4/ 6/
Indications in accordance with ISO 10110		<p style="text-align: center;"><i>Title field</i> Indication in accordance with 5.1.4 $\lambda = 546,07 \text{ nm}$</p>	

NOTE 5/, 13/ and/or 15/ specifications can be added to the table field if appropriate.

Figure 2 — Tabular indication of data for a cemented assembly (triplet)

5.2 Views

Optical elements shall be shown with incident light entering from the left and the optical axis horizontal, unless otherwise specified. Rotationally invariant parts and assemblies can be shown with just one cross-section drawing.

The preferred method is that components be drawn in cross section and hatched with short-long-short strokes in accordance with ISO 128-50. Back edges and hidden lines should normally be omitted (see [Figure 3](#)). However, for the sake of clarity, it can be necessary to include such lines.




Figure 3 — Hatching

Components of subassemblies, such as cemented components, shall be hatched in alternate directions.

For the purpose of simplification, optical parts may be drawn without hatching (see [Figure 4](#)). Mixing of hatched and unhatched parts in one drawing shall not be used.

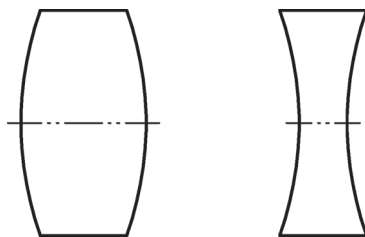


Figure 4 — Simplified drawings of lens elements

Lens elements with surfaces having two meridians of symmetry, such as cylindrical and toric surfaces, shall be drawn in two cross sections corresponding to these meridians (see [Figures 5](#) and [6](#)).




Figure 5 — Rectangular cylindrical lens element