

SLOVENSKI STANDARD

SIST-TP CLC/TR 50607-10:2016

01-marec-2016

Distribucija satelitskih signalov po enojnem koaksialnem kablu - 10. del: Smernice za izvedbo

Satellite signal distribution over a single coaxial cable - Part 10: Implementation guideline

Verteilen von Satellitensignalen über ein Koaxialkabel - Teil 10: Anwendungsleitfaden

Distribution de signaux satellites sur un seul câble coaxial - Partie 10: Lignes directrices de mise en oeuvre

STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: CLC/TR 50607-10:2015
SIST-TP CLC/TR 50607-10:2016
<https://standards.iteh.ai/catalog/standards/sist/cedb8c28-bdce-4b5a-8073-33f93a72821e/sist-tp-clc-tr-50607-10-2016>

ICS:

33.060.40	Kabelski razdelilni sistemi	Cabled distribution systems
33.120.10	Koaksialni kabli. Valovodi	Coaxial cables. Waveguides

SIST-TP CLC/TR 50607-10:2016

en,fr,de

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST-TP CLC/TR 50607-10:2016](https://standards.iteh.ai/catalog/standards/sist/eedb8e28-bdef-4b5a-8073-33f93a72821e/sist-tp-clc-tr-50607-10-2016)

<https://standards.iteh.ai/catalog/standards/sist/eedb8e28-bdef-4b5a-8073-33f93a72821e/sist-tp-clc-tr-50607-10-2016>

TECHNICAL REPORT
RAPPORT TECHNIQUE
TECHNISCHER BERICHT

CLC/TR 50607-10

November 2015

ICS 33.060.40

English Version

**Satellite signal distribution over a single coaxial cable -
Part 10: Implementation guideline**

Distribution de signaux satellites sur un seul câble coaxial -
Partie 10: Lignes directrices de mise en œuvre

Verteilen von Satellitensignalen über ein Koaxialkabel -
Teil 10: Anwendungsleitfaden

This Technical Report was approved by CENELEC on 2015-09-14.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST-TP CLC/TR 50607-10:2016](https://standards.iteh.ai/catalog/standards/sist/cedb8e28-bdef-4b5a-8073-33f93a72821e/sist-tp-clc-tr-50607-10-2016)

<https://standards.iteh.ai/catalog/standards/sist/cedb8e28-bdef-4b5a-8073-33f93a72821e/sist-tp-clc-tr-50607-10-2016>



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

European foreword	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Terms, definitions and abbreviations	5
3.1 Terms and definitions	5
3.2 Abbreviations	5
4 Standard applications	5
4.1 General note for all application examples	5
4.2 SCD2 Universal LNB	6
4.3 SCD2 Multi-switch with feed by Quatro LNB	6
4.4 SCD2 LNB with wideband architecture	7
4.5 SCD2 Multi-switch with wideband feed	8
4.6 SCD2 multi-switch (two satellite reception)	9
4.7 SCD2 C-Band LNB	9
4.8 SCD2 Ka-Band LNB (dual wideband hardware)	10
4.9 SCD2 multi-switch with Ka-Band LNB (dual wideband feed)	10
4.10 SCD2 Ka-Band LNB (ultra-wideband hardware)	11
5 Conclusion	11

Figures

Figure 1 — SCD2 Universal- LNB — Example for Ku Band	6
Figure 2 — SCD2 Multi-switch with standard feed by Universal LNB — Example for Ku Band	6
Figure 3 — SCD2 LNB with wideband architecture — Example for Ku Band	7
Figure 4 — SCD2 Multi-switch with wideband feed — Example for Ku Band	8
Figure 5 — SCD2 multi-switch (two-satellite reception)	9
Figure 6 — SCD2 C-Band LNB	9
Figure 7 — SCD2 Ka-Band LNB (dual wideband hardware)	10
Figure 8 — SCD2 multi-switch with Ka-Band LNB (dual wideband feed)	10
Figure 9 — SCD2 Ka-Band LNB (ultra-wideband hardware)	11

European foreword

This document (CLC/TR 50607-10:2015) has been prepared by CLC/TC 209, "Cable networks for television signals, sound signals and interactive services".

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST-TP CLC/TR 50607-10:2016

<https://standards.iteh.ai/catalog/standards/sist/eedb8e28-bdef-4b5a-8073-33f93a72821e/sist-tp-clc-tr-50607-10-2016>

Introduction

EN 50607 specifies the second generation of channel stacking systems for satellite reception. The second generation allows more reception possibilities by increasing the number of user bands and the number of satellite feeds.

This Technical Report provides implementation examples to assist manufacturers and installers of satellite distribution and satellite receiving equipment to implement EN 50607 in the most convenient way and to ease installation of products according to EN 50607.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST-TP CLC/TR 50607-10:2016](https://standards.iteh.ai/catalog/standards/sist/eedb8e28-bdef-4b5a-8073-33f93a72821e/sist-tp-clc-tr-50607-10-2016)

<https://standards.iteh.ai/catalog/standards/sist/eedb8e28-bdef-4b5a-8073-33f93a72821e/sist-tp-clc-tr-50607-10-2016>

1 Scope

This Technical Report describes a number of different satellite reception scenarios and how to use SCD2 here. In particular, Universal and Wideband LNB architectures for different SHF bands (Ku-, Ka- and C-Band) are taken into account.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 50607, *Satellite signal distribution over a single coaxial cable - Second generation*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 50607 apply.

3.2 Abbreviations

For the purposes of this document, the abbreviations given in EN 50607 apply.

4 Standard applications

4.1 General note for all application examples

The following examples show block diagrams for one user band only. For more user bands, switch matrix and converter blocks can be multiplied accordingly.

Function blocks are simplified (no pre-selection filters etc.).

Data format is simplified (offset of 100 MHz in transmitted data is ignored).

Only analogue converters are shown, the examples can be adapted for dCSS solutions accordingly.

Basically, the examples describe applications with:

- a) Universal LNB (see 4.2);
- b) Multi-switch with feed by Quatro LNB (see 4.3);
- c) LNB's with wideband architecture (see 4.4.);
- d) Multi-switch with wideband feed see (4.5);
- e) Two satellite reception (see 4.6);
- f) C-Band LNB's (see 4.7);
- g) Universal Ka Band LNB with dual wideband hardware (see 4.8);
- h) Multi-switch with feed by LNB (dual wideband feed) in 4.9;
- i) Ka Band LNB (ultra-wideband hardware) in 4.10.

4.2 SCD2 Universal LNB

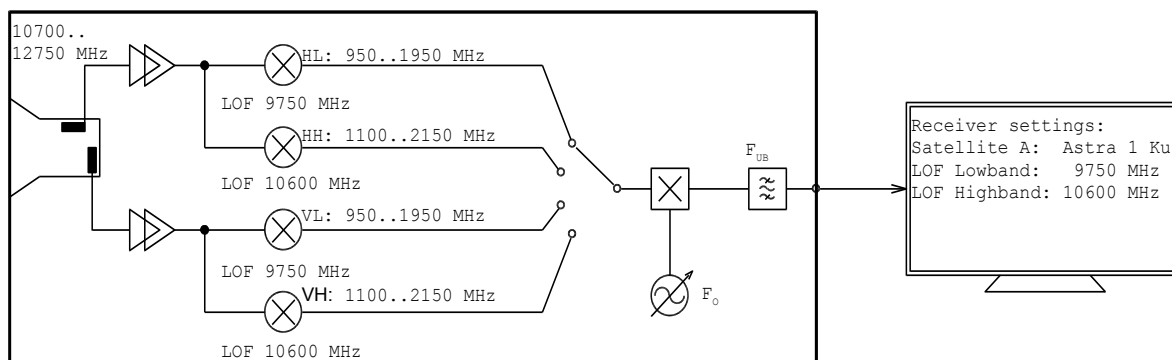


Figure 1 — SCD2 Universal- LNB — Example for Ku Band

This example shows a typical Universal LNB with a bank switch and one channel-stacking converter. The bank switch is controlled using the SCD2 bits .0 ("band") and .1 ("polarity"). The oscillator of the CSS converter is controlled by requested IF frequency from receiver plus frequency of the user band. In the receiver, the LOFs are set accordingly to the real LOFs of the LNB.

EXAMPLE Receiver is set to UB1 with 1 280 MHz. Desired program is 11 494 MHz, low band, horizontal. Receiver is configured to LOF 9 750 MHz for low band. Receiver calculates $IF = 11\,494\text{ MHz} - 9\,750\text{ MHz} = 1\,744\text{ MHz}$. This information is sent in SCD2 data format. To convert 1 744 MHz to 1 280 MHz, the SCD2 converter sets the oscillator to $F_o = 3\,024\text{ MHz}$.

NOTE Concerning LNB configuration (entering of LO frequencies for Low band and High band in), the necessary configuration measures by the installer are the same as for legacy DiSEqC LNBs. The procedure described above of course is also valid for LNBs operating in other frequency bands (for example Ka Band). An application with a Universal LNB which covers a frequency range of more than 2,05 GHz (dual wideband hardware) is described in 4.8.

4.3 SCD2 Multi-switch with feed by Quatro LNB

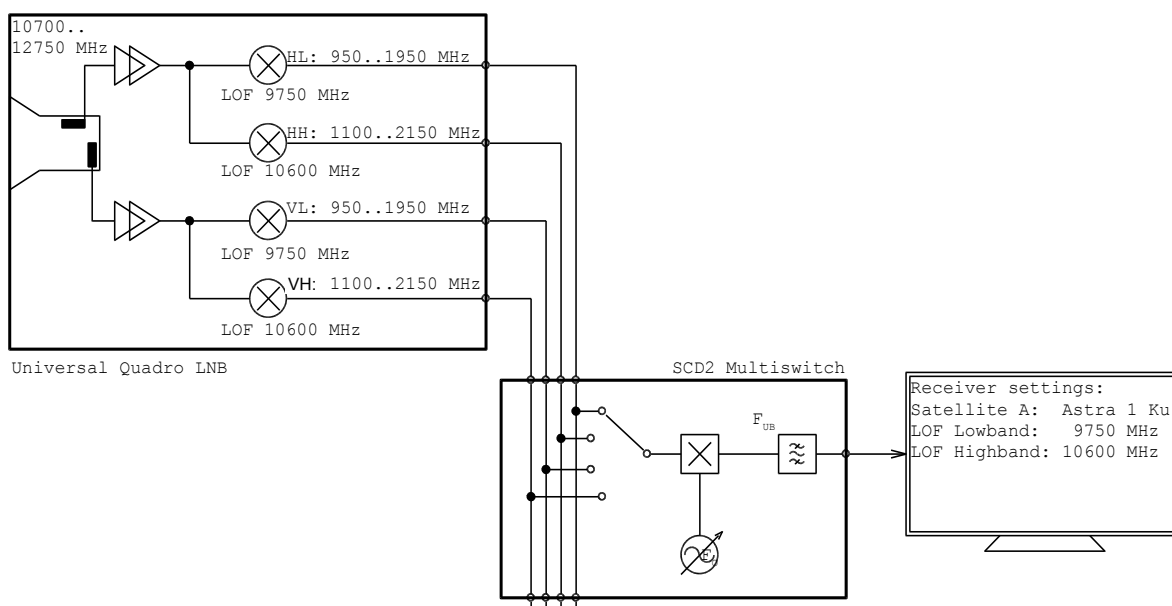


Figure 2 — SCD2 Multi-switch with standard feed by Universal LNB — Example for Ku Band

This example shows a typical application of a CSS multi-switch with a standard L-Band signal provided by a Quatro LNB. The bank switch of the CSS converter is controlled using the SCD2 bits .0 ("band") and .1 ("polarity"). The oscillator of the CSS converter is controlled by requested IF frequency from receiver plus frequency of the user band. In the receiver, the LOFs are set accordingly to the real LOFs of the LNB.

4.4 SCD2 LNB with wideband architecture

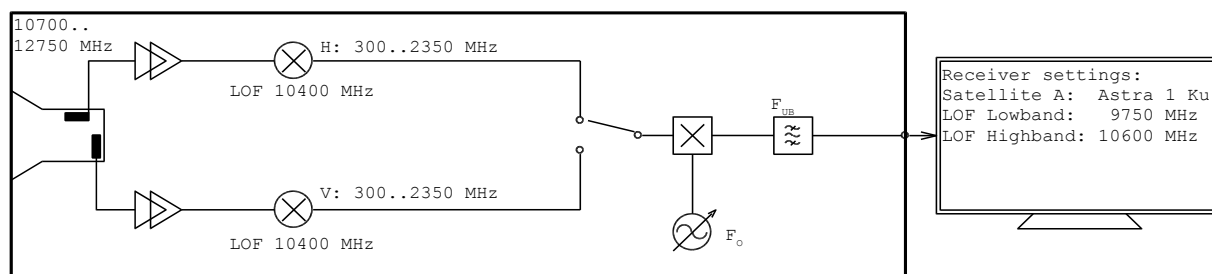


Figure 3 — SCD2 LNB with wideband architecture — Example for Ku Band

SCD2 also supports CSS LNBs using wideband architecture. In the above example, only one LOF with $F = 10\,400$ MHz is used. Functionality of a Universal LNB with standard band architecture is emulated; therefore, the receiver does not need special settings. The polarity switch is controlled using the SCD2 bit .1 ("polarity"). A band switch is emulated by adding an offset to the frequency of the CSS conversion oscillator. The offset depends on the SCD2 bit .0 ("band") and is -650 MHz for low band and $+200$ MHz for high band. SCD2 Universal Wide-Band LNBs using other LO frequencies than $10\,400$ MHz can be realised by using other offset frequencies (e.g. -450 MHz and $+400$ MHz for LOF = $10\,200$ MHz).

EXAMPLE 1 Receiver is set to UB1 with $1\,280$ MHz. Desired program is at $11\,494$ MHz, low band, horizontal. Receiver is configured to LOF $9\,750$ MHz for low band. Receiver calculates $IF = 11\,494\text{ MHz} - 9\,750\text{ MHz} = 1\,744\text{ MHz}$. This information is sent in SCD2 data format. In the SCD2 converter, low band request is received, so with this wide-band LNB hardware, the desired program can be found 650 MHz lower than with standard Universal LNB hardware. To convert the required channel $1\,744$ MHz to $1\,280$ MHz, the SCD2 converter sets oscillator to $F_o = 1\,744\text{ MHz} - 650\text{ MHz} + 1\,280\text{ MHz} = 2\,374\text{ MHz}$.

EXAMPLE 2 Receiver is set to UB1 with $1\,280$ MHz. Desired program is at $11\,836$ MHz, high band, horizontal. Receiver is configured to LOF $10\,600$ MHz for high band. Receiver calculates $IF = 11\,836\text{ MHz} - 10\,600\text{ MHz} = 1\,236\text{ MHz}$. This information is sent in SCD2 data format. In the SCD2 converter, high band request is received, so with this wide-band hardware, the desired program can be found 200 MHz higher than with standard L-Band hardware. To convert the required channel $1\,236$ MHz to $1\,280$ MHz, the SCD2 converter sets oscillator to $F_o = 1\,236\text{ MHz} + 200\text{ MHz} + 1\,280\text{ MHz} = 2\,716\text{ MHz}$.

NOTE Because Universal LNB emulation is used, the necessary configuration measures (entering LO frequencies in the STB menu) are equivalent to the NOTE in 4.2.