

SLOVENSKI STANDARD
oSIST prEN 303 681-2 V1.1.2:2020
01-julij-2020

Radijski sistemi z možnostjo preoblikovanja (RRS) - Informacijski modeli in protokoli za radijsko opremo (RE) za splošno arhitekturo preoblikovanja programske opreme - 2. del: Splošni spremenljivi radiofrekvenčni vmesnik (gRRFI)

Reconfigurable Radio Systems (RRS) - Radio Equipment (RE) information models and protocols for generalized software reconfiguration architecture - Part 2: generalized Reconfigurable Radio Frequency Interface (gRRFI)

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

Ta slovenski standard je istoveten z: ETSI EN 303 681-2 V1.1.2 (2020-03)

[SIST EN 303 681-2 V1.1.2:2020](https://standards.iteh.ai/catalog/standards/sist/46e1fa7a-0bf6-471a-923e-6cf5e48b57ef/sist-en-303-681-2-v1-1-2-2020)

<https://standards.iteh.ai/catalog/standards/sist/46e1fa7a-0bf6-471a-923e-6cf5e48b57ef/sist-en-303-681-2-v1-1-2-2020>

ICS:

33.060.01	Radijske komunikacije na splošno	Radiocommunications in general
35.200	Vmesniška in povezovalna oprema	Interface and interconnection equipment

oSIST prEN 303 681-2 V1.1.2:2020 **en**

Draft **ETSI EN 303 681-2** V1.1.2 (2020-03)



**Reconfigurable Radio Systems (RRS);
Radio Equipment (RE) information models and protocols
for generalized software reconfiguration architecture;
Part 2: generalized Reconfigurable
Radio Frequency Interface (gRRFI)**

[SIST EN 303 681-2 V1.1.2:2020](https://standards.iteh.ai/catalog/standards/sist/46e1fa7a-0bf6-471a-923e-6cf5e48b57ef/sist-en-303-681-2-v1-1-2-2020)

<https://standards.iteh.ai/catalog/standards/sist/46e1fa7a-0bf6-471a-923e-6cf5e48b57ef/sist-en-303-681-2-v1-1-2-2020>

Reference

REN/RRS-0229

Keywords

interface, radio, SDR

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

(<https://standards.iteh.ai>)

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Modal verbs terminology.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Definition of terms, symbols and abbreviations.....	6
3.1 Terms.....	6
3.2 Symbols.....	8
3.3 Abbreviations	8
4 Introduction	8
5 System Identification.....	10
5.1 Radio Computer Structure.....	10
5.2 URA	12
5.3 RF Transceiver	12
5.4 RF Interfaces	12
5.5 Radio Computer RF System Requirement Mapping.....	12
6 Notational Tools	13
6.1 Notational Tool for Information Model Classes.....	13
6.2 Notational Tool for Interface Classes.....	13
7 Information Model for Radio Computer	13
7.1 Radio Computer	13
7.2 Class Definitions for Information Model	16
8 Interface Definition	21
8.1 Interface Overview	21
8.2 Spectrum Control Services	24
8.2.1 Overview on Spectrum Control Services.....	24
8.2.2 Messages for Spectrum Control Services	24
8.3 Power Control Services	25
8.3.1 Overview on Power Control Services.....	25
8.3.2 Messages for Power Control Services	25
8.4 Antenna Management Services	25
8.4.1 Overview on Antenna Management Services.....	25
8.4.2 Messages for Antenna Management Services.....	26
8.5 Tx/Rx Chain Control Services.....	26
8.5.1 Overview on Tx/Rx Chain Control Services	26
8.5.2 Messages for Tx/Rx Chain Control Services	26
8.6 RVM Protection Services	27
8.6.1 Overview on RVM Protection Services.....	27
8.6.2 Messages for RVM Protection Services	28
8.7 Class Definitions for Interface.....	28
Annex A (informative): Abstract Data Definitions.....	31
Annex B (informative): gRRFI Qualification Methods for Validation	35
History	36

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This draft European Standard (EN) has been produced by ETSI Technical Committee Reconfigurable Radio Systems (RRS), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure.

The present document is part 2 of a multi-part deliverable covering the Radio Equipment (RE) information models and protocols, as identified below:

Part 1: "generalized Multiradio Interface (gMURI)";

Part 2: "generalized Reconfigurable Radio Frequency Interface (gRRFI)";

Part 3: "generalized Unified Radio Application Interface (gURAI)";

Part 4: "generalized Radio Programming Interface (gRPI)".

Proposed national transposition dates

Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Modal verbs terminology

In the present document **"shall"**, **"shall not"**, **"should"**, **"should not"**, **"may"**, **"need not"**, **"will"**, **"will not"**, **"can"** and **"cannot"** are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"must" and **"must not"** are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document defines an information model and protocol for generalized reconfigurable radio frequency interface for reconfigurable REs except for reconfigurable mobile devices which are covered in [i.7] to [i.12]. The work is based on the Use Cases defined in ETSI TR 103 585 [i.1], on the system requirements defined in ETSI EN 303 641 [1] and on the radio reconfiguration related architecture for reconfigurable RE defined in ETSI EN 303 648 [i.2].

The present document will be based on ETSI EN 303 146-2 [i.10] and provide a generalized interface definition for the generalized Reconfigurable Radio Frequency Interface.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 303 641: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) reconfiguration requirements".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI TR 103 585: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) reconfiguration use cases".
- [i.2] ETSI EN 303 648: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) reconfiguration architecture".
- [i.3] IEEE 1900.4™-2009: "IEEE Standard for Architectural Building Blocks Enabling Network-Device Distributed Decision Making for Optimized Radio Resource Usage in Heterogeneous Wireless Access Networks".
- [i.4] DigRFSM Working Group: "MIPI® Alliance Specification for DigRFSM v4".
- [i.5] Recommendation ITU-T X.680: "Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation".
- [i.6] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of Radio Equipment and repealing Directive 1999/5/EC.

- [i.7] ETSI EN 302 969: "Reconfigurable Radio Systems (RRS); Radio Reconfiguration related Requirements for Mobile Devices".
- [i.8] ETSI EN 303 095: "Reconfigurable Radio Systems (RRS); Radio reconfiguration related architecture for Mobile Devices (MD)".
- [i.9] ETSI EN 303 146-1: "Reconfigurable Radio Systems (RRS); Mobile Device (MD) information models and protocols; Part 1: Multiradio Interface (MURI)".
- [i.10] ETSI EN 303 146-2: "Reconfigurable Radio Systems (RRS); Mobile Device (MD) information models and protocols; Part 2: Reconfigurable Radio Frequency Interface (RRFI)".
- [i.11] ETSI EN 303 146-3: "Reconfigurable Radio Systems (RRS); Mobile Device (MD) information models and protocols; Part 3: Unified Radio Application Interface (URAI)".
- [i.12] ETSI EN 303 146-4: "Reconfigurable Radio Systems (RRS); Mobile Device (MD) information models and protocols; Part 4: Radio Programming Interface (RPI)".
- [i.13] ETSI EN 303 681-1: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) information models and protocols for generalized software reconfiguration architecture; Part 1: generalized Multiradio Interface (gMURI)".
- [i.14] ETSI EN 303 681-3: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) information models and protocols for generalized software reconfiguration architecture; Part 3: generalized Unified Radio Application Interface (gURAI)".
- [i.15] ETSI EN 303 681-4: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) information models and protocols for generalized software reconfiguration architecture; Part 4: generalized Radio Programming Interface (gRPI)".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

association: logical communication link to a Radio Access Network or a peer equipment

NOTE 1: Typically, some control signalling is necessary to maintain the association. No user data transfer may occur with only an association present, but a data flow may be established into an association for this purpose.

NOTE 2: Peer equipment is any communication counterpart of a reconfigurable Radio Equipment. It can be reached by establishing a logical communication link (i.e. an association) between the reconfigurable Radio Equipment and peer equipment.

channel: designated part of the information transfer capability having specified characteristics, provided at the user network interface

NOTE: It is the over-the-air wireless propagation channel which is used to convey an information signal from transmitter to receiver. This definition is specified in ETSI EN 303 648 [i.2].

Communication Services Layer (CSL): layer related to communication services supporting generic applications

NOTE: A communication services layer supports generic applications like Internet access. In the present document, it consists of Administrator, Mobility Policy Manager (MPM), Networking stack and Monitor.

link: connection from one location to another through a given Radio Access Technology for the purpose of transmitting and receiving digital information

NOTE: Each Link is conveyed over a given Channel.

Radio Application (RA): software which enforces the generation of the transmit RF signals or the decoding of the receive RF signals

NOTE 1: The software is executed on a particular radio platform or an RVM as part of the radio platform.

NOTE 2: RAs might have different forms of representation. They are represented as:

- source codes including Radio Library calls of Radio Library native implementation and Radio HAL calls;
- IRs including Radio Library calls of Radio Library native implementation and radio HAL calls;
- executable codes for a particular radio platform.

Radio Computer (RC): part of Radio Equipment working under ROS control and on which RAs are executed

NOTE: A Radio Computer typically includes programmable processors, hardware accelerators, peripherals, software, etc. RF part is considered to be part of peripherals.

Radio Control Framework (RCF): control framework which, as a part of the OS, extends OS capabilities in terms of radio resource management

NOTE: RCF is a control framework which consists of Configuration Manager (CM), Radio Connection Manager (RCM), Flow Controller (FC), Multiradio Controller (MRC) and Resource Manager (RM) which is typically part of OS.

Radio Equipment (RE): *"an electrical or electronic product, which intentionally emits and/or receives radio waves for the purpose of radio communication and/or radiodetermination, or an electrical or electronic product which must be completed with an accessory, such as antenna, so as to intentionally emit and/or receive radio waves for the purpose of radio communication and/or radiodetermination".*

NOTE: The definition above is as defined in the Radio Equipment Directive, Article 2(1)(1) [i.6].

Radio Frequency (RF) transceiver: part of radio platform converting, for transmission, baseband signals into radio signals, and, for reception, radio signals into baseband signals

Radio Operating System (ROS): any appropriate OS empowered by RCF

NOTE: ROS provides RCF capabilities as well as traditional management capabilities related to management of radio platform such as resource management, file system support, unified access to hardware resources, etc.

radio platform: part of radio equipment hardware which relates to radio processing capability, including programmable components, hardware accelerators, RF transceiver, and antenna(s)

NOTE: A Radio Platform is a piece of hardware capable of generating RF signals or receiving RF signals. By nature, it is heterogeneous hardware including different processing elements such as fixed accelerators, e.g. Application-Specific Integrated Circuit (ASIC), or reconfigurable accelerators, e.g. FPGAs, etc.

Radio Virtual Machine (RVM): abstract machine which supports reactive and concurrent executions

NOTE: An RVM may be implemented as a controlled execution environment which allows the selection of a trade-off between flexibility of base band code development and required (re-)certification efforts.

reconfigurable mobile device: mobile device with radio communication capabilities providing support for radio reconfiguration

NOTE: Reconfigurable mobile devices include but are not limited to: smartphones, feature phones, tablets, and laptops.

reconfigurable Radio Equipment: Radio Equipment with radio communication capabilities providing support for radio reconfiguration

NOTE: Reconfigurable Radio Equipment includes Smartphones, Feature phones, Tablets, Laptops, Connected Vehicle communication platform, Network platform, IoT device, etc.

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACK	ACKnowledgement
ACKM	ACKnowledgement with Modification
AP	Application Processor
ASIC	Application-Specific Integrated Circuit
ASN.1	Abstract Syntax Notation One
BBIC	Base-Band Integrated Circuit
BLER	Block Error Rate
CSL	Communication Services Layer
EU	European Union
gMURI	generalized Multiradio Interface
gRPI	generalized Radio Programming Interface
gRRFI	generalized Reconfigurable Radio Frequency Interface
gURAI	generalized Unified Radio Applications Interface
MIMO	Multiple Input Multiple Output
MPM	Mobility Policy Manager
NACK	Negative ACKnowledgement
OOB	Out Of Band
OS	Operating System
RA	Radio Application
RAN	Radio Access Network
RAP	Radio Application Package
RAT	Radio Access Technology
RC	Radio Computer
RCF	Radio Control Framework
RCID	Radio Computer Identification
RE	Radio Equipment
RERC	Radio Equipment Reconfiguration Class
RF	Radio Frequency
RFIC	Radio Frequency Integrated Circuit
ROS	Radio Operating System
RRFI	Reconfigurable Radio Frequency Interface
RVM	Radio Virtual Machine
RX	Reception
SINR	Signal to Interference plus Noise Ratio
TR	Technical Report
UML	Unified Modeling Language
URA	Unified Radio Applications

4 Introduction

A reconfigurable RE is capable of running multiple radios simultaneously, changing the set of radios by loading new Radio Application Packages (RAP) and setting their parameters. All Radio Applications (RAs) are called Unified Radio Applications (URAs) when they exhibit a common behaviour from the reconfigurable RE's point of view in ETSI EN 303 648 [i.2]. In order to run multiple URAs, the reconfigurable RE will include Communication Services Layer (CSL), Radio Control Frameworks (RCFs), Radio Platforms and 4 sets of interfaces for their interconnection.

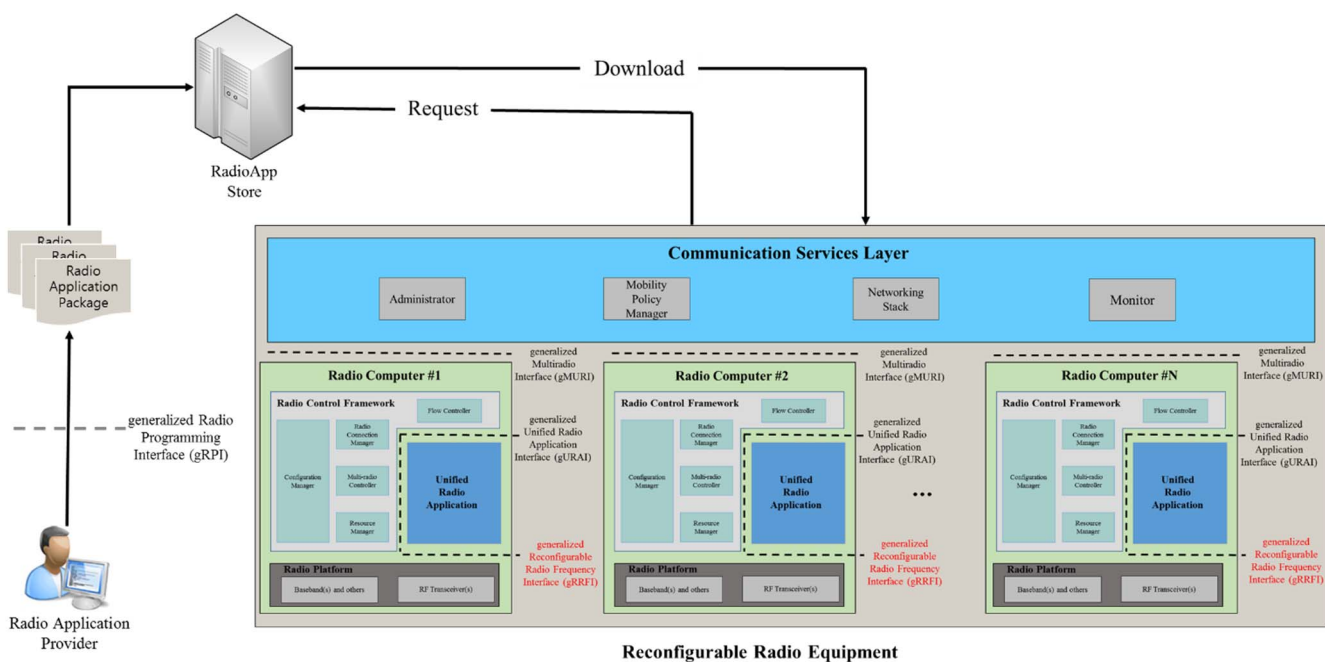


Figure 4.1: Four sets of interfaces for reconfigurable RE

Figure 4.1 illustrates the reconfigurable RE architecture with the 4 sets of interfaces, i.e.:

- gMURI for interfacing CSL and RCF (in ETSI EN 303 681-1 [i.13]).
- gRRFI for interfacing URA and RF Transceiver, which is the scope of the present document.
- gURAI for interfacing URA and RCF (in ETSI EN 303 681-3 [i.14]).
- gRPI for allowing an independent and uniform production of RAs (in ETSI EN 303 681-4 [i.15]).

The present document defines gRRFI.

SIST EN 303 681-2 V1.1.2:2020

<https://standards.iteh.ai/catalog/standards/sist/46e1fa7a-0bf6-471a-923e-6cf5e48b57ef/sist-en-303-681-2-v1-1-2-2020>