



**Digital cellular telecommunications system (Phase 2+) (GSM);  
Universal Mobile Telecommunications System (UMTS);  
LTE;  
5G;  
(U)SIM Application Programming Interface (API);  
(U)SIM API for Java™ Card  
(3GPP TS 31.130 version 14.2.1 Release 14)**



---

**Reference**

RTS/TSGC-0631130ve21

---

**Keywords**

5G,GSM,LTE,UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

**3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

**GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope .....	6
2 References .....	6
3 Definitions and abbreviations.....	7
3.1 Definitions .....	7
3.2 Abbreviations .....	7
4 Description .....	7
4.0 Overview .....	7
4.1 (U)SIM Java Card™ Architecture.....	8
5 File Access API.....	8
6 (U)SAT Framework .....	8
6.0 Overview .....	8
6.1 Applet triggering .....	9
6.1.1 Exception Handling .....	9
6.2 Definition of Events .....	9
6.3 Registration .....	13
6.4 Proactive command handling .....	13
6.5 Envelope response handling .....	14
6.6 System Handler management .....	14
6.7 (U)SAT Framework behaviour.....	15
7 UICC toolkit applet .....	15
8 Geo Location API.....	15
<b>Annex A (normative): Java Card™ (U)SIM API.....</b>	<b>16</b>
<b>Annex B (normative): Java Card™ (U)SIM API identifiers .....</b>	<b>17</b>
<b>Annex C (normative): (U)SIM API package version management .....</b>	<b>18</b>
<b>Annex D (normative): USIM API jar files .....</b>	<b>19</b>
<b>Annex E (informative): Change History .....</b>	<b>20</b>
History .....	22

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

**ITEH STANDARD PREVIEW**  
(standards.iteh.ai)

Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/249aee3c-60b5-4297-988b-031482d564a4/etsi-ts-131-130-v14.2.1-2020-04>

---

# 1 Scope

The present document defines the (U)SIM Application Programming Interface extending the "UICC API for Java Card™" [2].

This API allows to develop a (U)SAT application running together with a (U)SIM application and using GSM/3G network features.

The present document includes information applicable to network operators, service providers, server – (U)SIM – and database manufacturers.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] ETSI TS 101 220: "Integrated Circuit Cards (ICC); ETSI numbering system for telecommunication; Application providers (AID)".
- [2] ETSI TS 102 241 V13.0.0: "UICC API for Java Card™"
- [3] 3GPP TS 31.102: "Characteristics of the USIM Application".
- [4] 3GPP TS 51.011 Release 4: "Specification of the Subscriber Identity Module- Mobile Equipment (SIM – ME) interface".
- [5] 3GPP TS 23.041: "Technical realization of Cell Broadcast Service (CBS)".
- [6] 3GPP TS 31.101: "UICC terminal interface; Physical and logical characteristics".
- [7] 3GPP TS 31.111: "USIM Application Toolkit (USAT)".
- [8] 3GPP TS 51.014 Release 4: "Specification of the SIM Application Toolkit for the Subscriber Identity Module – Mobile Equipment (SIM – ME) interface".
- [9] 3GPP TS 31.115: "Secured packet structure for the (U)SIM Toolkit applications".
- [10] 3GPP TS 23.040: "Technical realization of the Short Message Service (SMS)".
- [11] ORACLE "Application Programming Interface, Java Card™ Platform, 3.0.1 Classic Edition".
- [12] ORACLE "Runtime Environment Specification, Java Card™ Platform, 3.0.1 Classic Edition".
- [13] ORACLE "Virtual Machine Specification Java Card™ Platform, 3.0.1 Classic Edition".

Note: ORACLE Java Card™ Specifications can be downloaded at <http://docs.oracle.com/javame/javacard/javacard.html>

- [14] 3GPP TS 23.032: "Universal Geographical Area Description (GAD)".
- [15] IEC 61162-1: "Maritime navigation and radio communication equipment and systems – Digital interfaces".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions defined in ETSI TS 102 241 [2] apply.

**(U)SAT Framework** : (U)SAT extension of the CAT Runtime Environment.

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations defined in ETSI TS 102 241 [2] apply.

---

## 4 Description

### 4.0 Overview

This API is an extension to the ETSI TS 102 241 [2] "UICC API for Java Card™" and requires the implementation of this specification.

The classes and interfaces described in this specification inherit functionality from the classes and interfaces specified in the "UICC API for Java Card™".

The (U)SAT Framework described in this specification is an extension of the CAT Runtime Environment defined in ETSI TS 102 241 [2].

**ITeH STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/siv/249ae23c-60b5-4297-988b-031482d564a4/etsi-ts-131-130-v14-2-1-2020-04>



## 4.1 (U)SIM Java Card™ Architecture

The overall architecture of the (U)SIM API is based on the "UICC API for Java Card™" defined in ETSI TS 102 241 [2].

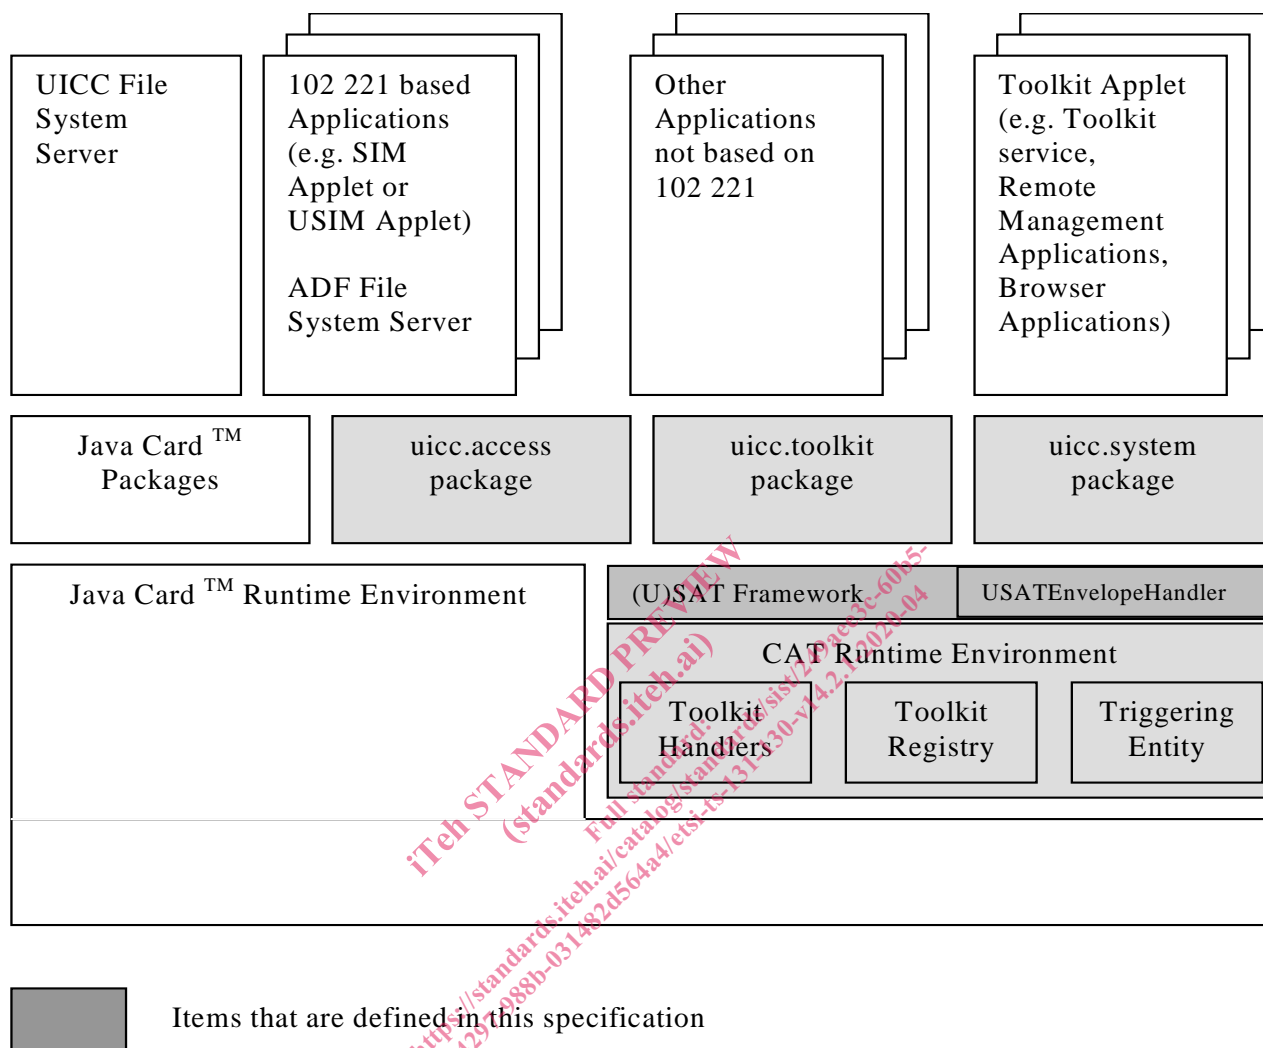


Figure 1: (U)SIM Java Card™ Architecture

## 5 File Access API

The (U)SIM file access API consists of the package *uicc.usim.access*. This package defines additional constants to those defined in the *uicc.access* package from ETSI TS 102 241 [2]. The access to the file system, defined in TS 51.011 [4] and TS 31.102 [3], is the one specified in ETSI TS 102 241 [2] via the UICC *FileView* Interface. When selecting a cyclic file the current record number is defined, this applies also to files located under DF<sub>GSM</sub>.

## 6 (U)SAT Framework

### 6.0 Overview

The (U)SIM toolkit API consists of the *uicc.usim.toolkit* package for toolkit features defined in TS 31.111 [7] and TS 51.014 [8], and is based on the *uicc.toolkit* package defined in ETSI TS 102 241 [2].

## 6.1 Applet triggering

See ETSI TS 102 241 [2].

### 6.1.1 Exception Handling

The following clause describes the handling of exceptions by the (U)SAT Framework in addition to the behaviour defined in ETSI TS 102 241 [2] for the CAT Runtime Environment.

If an Applet triggered by `EVENT_FORMATTED_SMS_PP_ENV` event throws an `ISOException` with the reason code (0x6FXX), it shall be sent to the terminal.

Other Exceptions shall not be propagated to the terminal.

## 6.2 Definition of Events

The following events can trigger a Toolkit Applet in addition to the events defined in ETSI TS 102 241 [2], all short values are reserved in ETSI TS 102 241 [2]:

**Table 1: (U)SAT event list**

Event Name	Reserved short value
<code>EVENT_FORMATTED_SMS_PP_ENV</code>	2
<code>EVENT_FORMATTED_SMS_PP_UPD</code>	3
<code>EVENT_UNFORMATTED_SMS_PP_ENV</code>	4
<code>EVENT_UNFORMATTED_SMS_PP_UPD</code>	5
<code>EVENT_UNFORMATTED_SMS_CB</code>	6
<code>EVENT_MO_SHORT_MESSAGE_CONTROL_BY_NAA</code>	10
<code>EVENT_FORMATTED_SMS_CB</code>	24
<code>EVENT_EVENT_DOWNLOAD_IWLAN_ACCESS_STATUS</code>	30
<code>EVENT_EVENT_DOWNLOAD_NETWORK_REJECTION</code>	31
<code>EVENT_EVENT_DOWNLOAD_CSG_CELL_SELECTION</code>	33
<code>EVENT_EVENT_DOWNLOAD_DATA_CONNECTION_STATUS_CHANGE</code>	37
<code>EVENT_FORMATTED_USSD</code>	121
<code>EVENT_UNFORMATTED_USSD</code>	122
<code>EVENT_EVENT_DOWNLOAD_IMS_REGISTRATION</code>	119
<code>EVENT_EVENT_DOWNLOAD_INCOMING_IMS_DATA</code>	120

*EVENT\_FORMATTED\_SMS\_PP\_ENV*, *EVENT\_UNFORMATTED\_SMS\_PP\_ENV*,  
*EVENT\_FORMATTED\_SMS\_PP\_UPD*, *EVENT\_UNFORMATTED\_SMS\_PP\_UPD*

There are two ways for a card to receive a Short Message Point to Point: via an `ENVELOPE(SMS-PP DOWNLOAD)` APDU as defined in TS 31.111 [7] and TS 51.014 [8] or an `UPDATE RECORD EFSMS` APDU as defined in TS 31.102 [3] and TS 51.011 [4]. The `EFSMS` can be either located under the `DFTelecom` or under any ADF as defined in TS 31.102 [3] and TS 51.011 [4].

The received Short Message may be:

- formatted according to TS 31.115 [9] or an other protocol to identify explicitly the toolkit applet for which the message is sent;
- unformatted (e.g. a toolkit applet specific protocol ) then the (U)SAT Framework will pass this data to all registered toolkit applets.

When the Short Message is received as Concatenated Short Messages as defined in TS 23.040 [10], it is the responsibility of the (U)SAT Framework to link single Short Messages together to re – assemble the original message before any further processing. The original Short Message shall be placed in one SMS TPDU TLV (with TP-UDL field coded on one octet) included in the *USATEnvelopeHandler*. The concatenation control headers used to re-assemble the short messages in the correct order shall not be present in the SMS TPDU. The TP-elements of the SMS TPDU and the Address (TS – Service-Centre-Address) shall correspond to the ones in the last received Short Message (independently of the Sequence number of Information-Element-Data).