



Designation: D522 – 93a(Reapproved 2008)

## Standard Test Methods for Mandrel Bend Test of Attached Organic Coatings<sup>1</sup>

This standard is issued under the fixed designation D522; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

*This standard has been approved for use by agencies of the Department of Defense.*

### 1. Scope

1.1 These test methods cover the determination of the resistance to cracking (flexibility) of attached organic coatings on substrates of sheet metal or rubber-type materials.

1.2 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

### 2. Referenced Documents

2.1 *ASTM Standards:*<sup>2</sup>

**D823** Practices for Producing Films of Uniform Thickness of Paint, Varnish, and Related Products on Test Panels

**D1005** Test Method for Measurement of Dry-Film Thickness of Organic Coatings Using Micrometers

**D1186** Test Methods for Nondestructive Measurement of Dry Film Thickness of Nonmagnetic Coatings Applied to a Ferrous Base (Withdrawn 2006)<sup>3</sup>

**D1400** Test Method for Nondestructive Measurement of Dry Film Thickness of Nonconductive Coatings Applied to a Nonferrous Metal Base (Withdrawn 2006)<sup>3</sup>

### 3. Summary of Test Method

3.1 The coating materials under test are applied at uniform thickness to panels of sheet metal or rubber-type materials. After drying or curing the coated panels are bent over a

<sup>1</sup> These test methods are under the jurisdiction of ASTM Committee D01 on Paint and Related Coatings, Materials, and Applications and are the direct responsibility of Subcommittee D01.23 on Physical Properties of Applied Paint Films.

Current edition approved Feb. 15, 2008. Published February 2008. Originally approved in 1939. Last previous edition approved in 2001 as D522 – 93a (2001). DOI: 10.1520/D0522-93AR08.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, [www.astm.org](http://www.astm.org), or contact ASTM Customer Service at [service@astm.org](mailto:service@astm.org). For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>3</sup> The last approved version of this historical standard is referenced on [www.astm.org](http://www.astm.org).

mandrel and the resistance to cracking of the coating is determined. In Test Method A the coated panels are bent over a conical mandrel. In Test Method B the coated panels are bent over cylindrical mandrels of various diameters.

### 4. Significance and Use

4.1 Coatings attached to substrates are elongated when the substrates are bent during the manufacture of articles or when the articles are abused in service. These test methods have been useful in rating attached coatings for their ability to resist cracking when elongated. They have been useful in evaluating the flexibility of coatings on flexible substrates.

### 5. Test Specimen

5.1 *Substrates:*

5.1.1 If the purpose of the test is to determine the percent of elongation of the coating material, the substrate shall be cold-rolled steel strip 0.8 mm ( $\frac{1}{32}$  in.) (22 gage) thick.

5.1.2 If the purpose of the test is to rate the coated material for resistance to cracking, the substrate may be any type of sheet metal or rubber-type material (for example, steel, aluminum, tinplate, or synthetic rubber). The thickness of the sheet metal may be less than 0.8 mm ( $\frac{1}{32}$  in.) and the thickness of the rubber-type materials may be as great as 13 mm ( $\frac{1}{2}$  in.).

5.1.3 The recommended panel size is 100 mm (4 in.) in width and 150 mm (6 in.) in length. The maximum size that the conical mandrel can accommodate is 115 mm (4½ in.) wide and 190 mm (7½ in.) long.

5.1.4 The surface preparation of the substrate shall be agreed upon between the purchaser and the seller. Prior to the application of the coating, round slightly the edges of metal panels to remove burrs in order to eliminate anomalous edge effects.

NOTE 1—If elongations are to be determined for coatings applied to substrates other than 0.8 mm ( $\frac{1}{32}$  in.) thick cold-rolled steel, they must be measured with a special mandrel jig as described in Appendix X1.2.

5.2 *Coated Panels:*

5.2.1 Apply uniform coatings of the materials under test to the substrates in accordance with Practices D823 and air dry or bake under conditions mutually agreeable to the purchaser and the seller. If percent elongation is to be measured, a minimum thickness of 1.0 mil is required on 0.8 mm ( $\frac{1}{32}$  in.) thick

cold-rolled steel. Perform a minimum of three determinations of coating thickness on each of the specimens in accordance with Test Methods D1005, D1186, or D1400.

5.2.2 From precoated sheets cut at least three specimens of the size given in 5.1.3. Use only plane (flat) sheets and round the edges of the panels slightly as in 5.1.4. The coating surface shall be free of oil and other foreign matter that might increase the flexibility of the coating or interfere with the observation for cracking. Measure the film thickness as in 5.2.1.

**6. Conditioning and Number of Tests**

6.1 Condition the test specimens for at least 24 h at 23 ± 2°C (73.5 ± 3.5°F) and 50 ± 5 % relative humidity, and test in the same environment or immediately on removal therefrom unless otherwise specified by the purchaser and seller.

6.2 Test at least three replicate specimens in Test Method A and at least two replicate specimens in Test Method B at each mandrel diameter of interest.

**TEST METHOD A—CONICAL MANDREL TEST**

**7. Apparatus**

7.1 *Conical Mandrel Tester*, consisting of a metal cone, a rotating panel-bending arm, and panel clamps, all mounted on a metal base as illustrated in Fig. 1.

7.1.1 *Cone*, smooth steel, 8 in. (200 mm) in length, with a diameter of 3 mm (1/8 in.) at one end and a diameter of 38 mm (1 1/2 in.) at the other end.

**8. Procedure**

8.1 With the operating lever of the apparatus in a horizontal position, slip the test specimen between the mandrel and the drawbar with the finish side towards the drawbar. Rigidly clamp the specimen in a vertical position adjacent to the mandrel by placing the long edge behind the clamping bar in such a manner that the panel is always set up to the narrow end of the mandrel. Slip two sheets of No. 1 brown kraft wrapping paper, substrate 30, thoroughly lubricated on each side with talc, between the specimen and the drawbar and hold in position only by the pressure of the drawbar against the paper.

8.2 Move the lever through about 180° at uniform velocity to bend the specimen approximately 135°. If the purpose of the test is to measure elongation, the bend should be 15 s. To determine crack resistance under more simulated use conditions, the bend time should be about 1 s unless an alternative time is agreed upon between the producer and the user.

8.3 Examine the bent surface of the specimen immediately with the unaided eye for cracking. Having determined and suitably marked the end of the crack farthest from the small end of the mandrel, which shall be considered as the end point, bring the drawbar to the starting position and remove the panel from the mandrel. Measure the distance from the farthest end of the crack to the small end of the mandrel. This distance is used to compute the elongation. The mandrel diameter at which cracking ceased is taken as the resistance to cracking value.

NOTE 2—In some cases, the measured distance is used as a measure of crack resistance.

**9. Calculation**

9.1 When required, determine the elongation of the finish from the plotted curve in Fig. 2. This curve represents the relationship between the percent elongation and the diameter of the conical mandrel for a 1.0 mil coating thickness. The relation between the distance along the conical mandrel and the corresponding diameter has also been plotted on this curve.

9.2 Adjust the percent elongation value obtained from Fig. 2 for coating thickness by adding the correction obtained from Fig. 3.

NOTE 3—*Example*—Suppose visual examination of the finish on the bent cold-rolled steel specimens 0.8 mm (1/32 in.) in thickness shows that the end of the first crack in the coating is at a distance of 75 mm (3 in.) from the small end of the cone. From Fig. 2 determine the percent elongation of the film from the measured crack distance, in this example 5.2 %. To correct for coating thickness add the value obtained in Fig. 3. At a crack distance of 75 mm (3 in.) the correction per 25 µm (1 mil) of coating thickness is 0.3 %. If the film thickness in the example is 50 µm (2 mils), the actual percent elongation is 5.2 + (2 × 0.3) = 5.8 %.

**10. Report**

10.1 Report the following information:

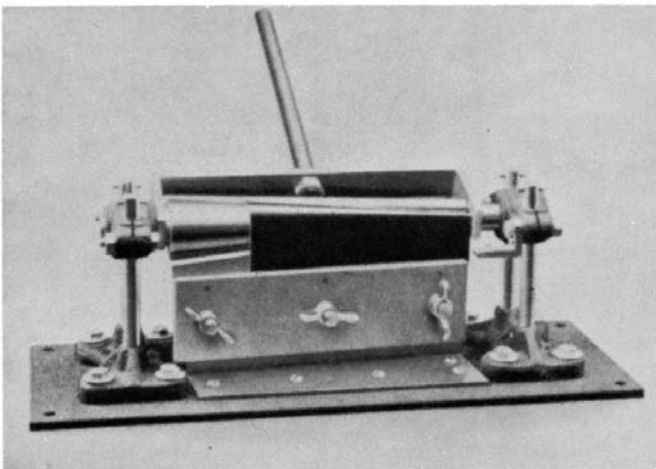


FIG. 1 Conical Mandrel Test Apparatus

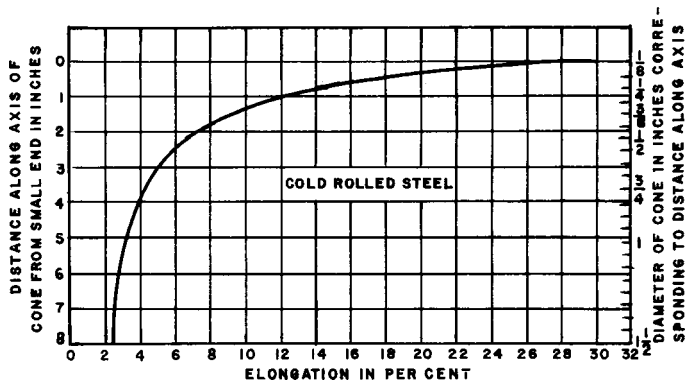


FIG. 2 Distance Along Cone and Corresponding Mandrel Size versus Percent Elongation for Specimens on Cold-Rolled Steel 0.8 mm (1/32 in.) in Thickness