



**Intelligent Transport Systems (ITS);
Vehicular Communications;
GeoNetworking;
Part 4: Geographical addressing and forwarding for
point-to-point and point-to-multipoint communications;
Sub-part 2: Media-dependent functionalities for ITS-G5**

ETSI STANDARDS PREVIEW
https://standards.etsi.org/standards-search/102636-4-2-v1.3.1-2020-08-08/

 Reference

RTS/ITS-00365

 Keywords

addressing, ITS, network, point-to-multipoint,
point-to-point, protocol**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Modal verbs terminology.....	4
Introduction	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Definition of terms, symbols and abbreviations.....	6
3.1 Terms.....	6
3.2 Symbols.....	6
3.3 Abbreviations	7
4 Overview	7
5 DCC functionality at networking & transport layer (DCC_NET) for ITS-G5.....	8
5.1 General	8
5.2 Maintenance of DCC variables	9
5.3 Calculation of the global channel busy ratio <i>CBR_G</i>	10
5.4 DCC_NET	10
6 Addressing, data structure extensions and field settings for ITS-G5	11
6.1 GeoNetworking address	11
6.2 Location table extensions for ITS-G5	11
6.2.1 General.....	11
6.2.2 Definition of additional data elements for the location table entry	11
6.2.3 Maintenance of additional data elements for the location table entry.....	12
6.3 Field settings in the GeoNetworking header	12
6.3.1 General.....	12
6.3.2 Field settings in the <i>Common Header</i>	13
6.3.3 Field settings in the <i>Extended Header</i> of the SHB packet	13
6.4 EtherType	14
7 Extensions of packet handling algorithms for ITS-G5	14
7.1 General	14
7.2 Extensions of SHB packet handling	14
7.2.1 Extensions for source operations	14
7.2.2 Extensions for receiver operations.....	15
8 Mapping of traffic classes to transmission parameters for ITS-G5.....	15
Annex A (normative): GeoNetworking protocol constants for ITS-G5	16
Annex B (informative): Extensions of the GeoNetworking MIB	17
Annex C (informative): Extensions of forwarding algorithms for ITS-G5.....	18
C.1 General	18
C.2 Enhancements of non-area and area Contention-Based Forwarding (CBF) algorithms	19
Annex D (informative): Bibliography.....	20
History	21

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Intelligent Transport Systems (ITS).

The present document is part 4, sub-part 2 of a multi-part deliverable. Full details of the entire series can be found in part 1 [i.1].

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Introduction

The GeoNetworking protocol is a network protocol that provides packet routing in an ad hoc network. It makes use of geographical positions for packet transport. GeoNetworking supports the communication among individual ITS-Ss as well as the distribution of packets in geographical areas.

GeoNetworking can be executed over different ITS access technologies for short-range wireless technologies, such as ITS-G5. In order to reuse the GeoNetworking protocol specification for multiple ITS access technologies, the specification is separated into media-independent and media-dependent functionalities. Media-independent GeoNetworking functionalities are those which are common to all ITS access technologies for short-range wireless communication and are specified in ETSI EN 302 636-4-1 [1]. The present document specifies media-dependent functionalities for GeoNetworking when using the ITS access technology ITS-G5 (see ETSI EN 302 663 [2]). The specification in the present document should be regarded as ITS-G5 specific extensions of the GeoNetworking protocol specified in ETSI EN 302 636-4-1 [1] and does not represent a distinct protocol entity.

1 Scope

The present document specifies the media-dependent functionalities for GeoNetworking defined in ETSI EN 302 636-4-1 [1] over ITS-G5 defined in ETSI EN 302 663 [2] as a network protocol for ad hoc routing in vehicular environments.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 302 636-4-1 (V1.4.1): "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 4: Geographical addressing and forwarding for point-to-point and point-to-multipoint communications; Sub-part 1: Media-Independent Functionality".
- [2] ETSI EN 302 663 (V1.3.1): "Intelligent Transport Systems (ITS); ITS-G5 Access layer specification for Intelligent Transport Systems operating in the 5 GHz frequency band".
- [3] ETSI TS 103 175 (V1.1.1): "Intelligent Transport Systems (ITS); Cross Layer DCC Management Entity for operation in the ITS G5A and ITS G5B medium".
- [4] ETSI TS 102 687 (V1.2.1): "Intelligent Transport Systems (ITS); Decentralized Congestion Control Mechanisms for Intelligent Transport Systems operating in the 5 GHz range; Access layer part".
- [5] ETSI TS 103 301 (V1.3.1): "Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Applications; Facilities layer protocols and communication requirements for infrastructure services".
- [6] Car-2-Car[®] Communication Consortium Version 1.5: "Basic System Profile".

NOTE: Available at <https://www.car-2-car.org/documents/basic-system-profile>.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EN 302 636-1 (V1.2.1): "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 1: Requirements".
- [i.2] ETSI EN 302 665 (V1.1.1): "Intelligent Transport Systems (ITS); Communications Architecture".

- [i.3] ETSI EN 302 571 (V2.1.1): "Intelligent Transport Systems (ITS); Radiocommunications equipment operating in the 5 855 MHz to 5 925 MHz frequency band; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU".
- [i.4] IEEE 802.11TM-2016: "IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks-Specific requirements - Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications".
- [i.5] IEEETM Registration Authority.
- NOTE: Available at <https://standards.ieee.org/content/ieee-standards/en/products-services/regauth/index.html>.
- [i.6] List of assigned EtherTypes at the IEEETM Registration Authority.
- NOTE: Available at <http://standards-oui.ieee.org/ethertype/eth.txt>.

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ETSI EN 302 636-4-1 [1], ETSI EN 302 663 [2], ETSI TS 103 175 [3], ETSI TS 102 687 [4] and the following apply:

1-hop channel busy ratio: highest local channel busy ratio that the ego ITS station has received from its 1-hop neighbourhood over a certain time

2-hop channel busy ratio: highest 1-hop channel busy ratio that the ego ITS station has received from its 1-hop neighbourhood over a certain time

channel busy ratio: time-dependent value between zero and one (both inclusive) representing the fraction of time that the channel was busy

global channel busy ratio: maximum of the local channel busy ratio, the 1-hop channel busy ratio and the 2-hop channel busy ratio

local channel busy ratio: time-dependent value between zero and one (both inclusive) representing the channel busy ratio as perceived locally by a specific ITS station

3.2 Symbols

For the purposes of the present document, the symbols given in ETSI EN 302 636-4-1 [1], ETSI EN 302 663 [2], ETSI TS 103 175 [3], ETSI TS 102 687 [4] and the following apply:

<i>CBR_L_0_Hop</i>	Local channel busy ratio for a specific frequency channel for ego ITS station
<i>CBR_L_1_Hop</i>	Highest received value of <i>CBR_R_0_Hop</i>
<i>CBR_L_2_Hop</i>	Highest received value of <i>CBR_R_1_Hop</i>
<i>CBR_R_0_Hop</i>	Local channel busy ratio <i>CBR_L_0_Hop</i> disseminated in single-hop broadcast packets
<i>CBR_R_1_Hop</i>	Highest received <i>CBR_L_1_Hop</i> disseminated in single-hop broadcast packets
<i>CBR_Target</i>	Intended global channel busy ratio
<i>CBR_G</i>	Global channel busy ratio for a specific frequency channel
<i>T_Cbr</i>	Lifetime of the channel busy ratio
<i>T_Trig</i>	Trigger interval to update <i>CBR_G</i>

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI EN 302 636-4-1 [1], ETSI EN 302 663 [2], ETSI TS 103 175 [3], ETSI TS 102 687 [4] and the following apply:

LocTEX Location Table Entry eXtension

4 Overview

The present document specifies the media-dependent functionalities necessary to run the GeoNetworking protocol defined in ETSI EN 302 636-4-1 [1] over the ITS-G5 access technology defined in ETSI EN 302 663 [2]. The functionalities are:

- Decentralized congestion control (DCC) at the networking & transport layer for the ITS-G5 access technology, specifically information sharing for DCC (DCC_NET) (clause 5).
- Addressing, data structure extensions and field settings in the GeoNetworking headers for ITS-G5 (clause 6).
- Extensions for packet handling of the GeoNetworking protocol for ITS-G5 (clause 7).
- Mapping of traffic classes to transmission parameters for ITS-G5 (clause 8).

The present document also proposes extensions for forwarding algorithms of the GeoNetworking protocol for ITS-G5 (annex C).

Figure 1 illustrates the ITS reference architecture as specified in ETSI EN 302 665 [i.2]. The present document specifies ITS-G5 specific, media-dependent functionalities for the GeoNetworking protocol, which are found in the networking & transport layer.

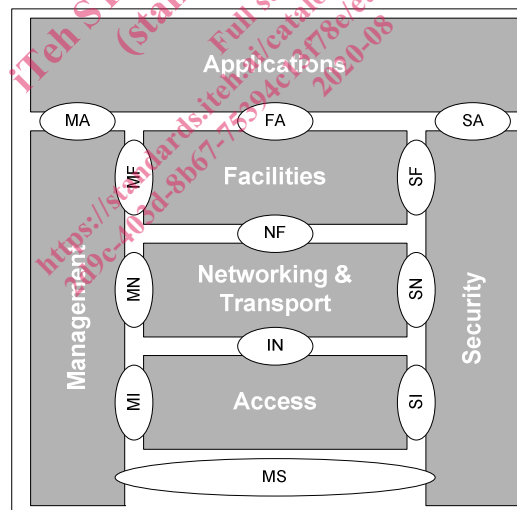


Figure 1: ITS-S reference architecture as specified in ETSI EN 302 665 [i.2]

A GeoNetworking packet transmitted over the ITS-G5 access technology is part of the overall frame/packet structure depicted in figure 2 (without security) and figure 3 (with security), respectively:

- 1) The *MAC header* is the header of the MAC protocol of the ITS-G5 access technology. The MAC protocol adds an additional protocol element for the trailer for the MAC FCS as specified in ITS-G5 defined in ETSI EN 302 663 [2].

NOTE 1: The MAC header is not specified by the present document. However, the GeoNetworking protocol sets the MAC address, or more generally the link layer address, in order to define and identify the next hop of a GeoNetworking packet.

- 2) The LLC header is the header of 802.2 LLC (see ETSI EN 302 663 [2]).

- 3) The *GeoNetworking header* is the header of the GeoNetworking packet as defined in ETSI EN 302 636-4-1 [1] extended for media-dependent GeoNetworking functionality over ITS-G5 as specified in the present document.
- 4) The optional payload represents the user data that are created by upper protocol entities, i.e. the T-SDU or GN6-SDU. It is passed to the GeoNetworking protocol for transmission.

NOTE 2: The general packet structure is shown as seen by the MAC protocol of the ITS-G5 access technology.

NOTE 3: Some GeoNetworking packets do not carry a payload, such as Beacon.




Figure 2: GeoNetworking packet structure over ITS-G5 (without security)




Figure 3: GeoNetworking packet structure over ITS-G5 (with security)

5 DCC functionality at networking & transport layer (DCC_NET) for ITS-G5

5.1 General

An ITS-S operating the ITS-G5 access technology supports Decentralized Congestion Control (DCC) to ensure that the radio channel is not congested by too many transmissions within a certain geographical range (see ETSI EN 302 571 [i.3]). As specified in ETSI TS 103 175 [3], clause 5 "DCC architecture", the DCC functionality is distributed among the entities DCC_FAC, DCC_NET, DCC_ACC and DCC_CROSS at the different layers and entities of the ITS reference architecture (see figure 4).

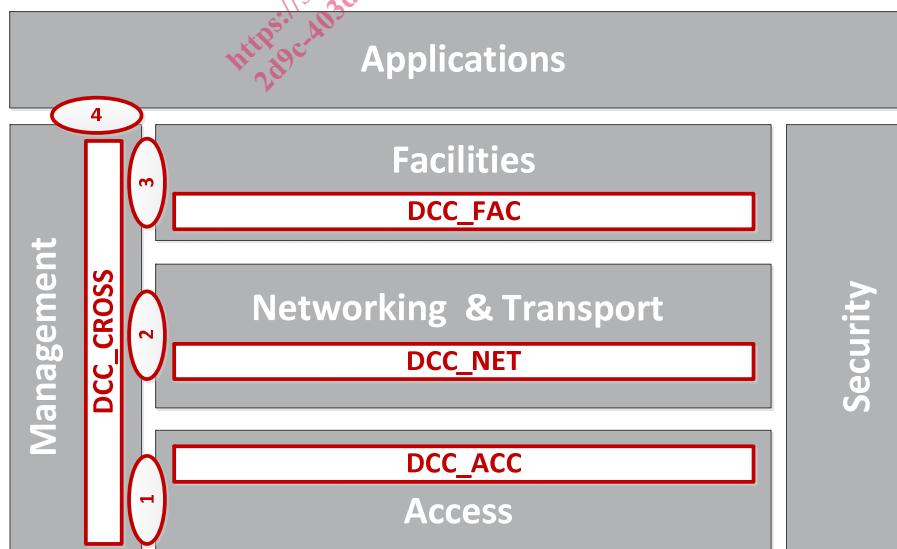


Figure 4: DCC architecture as specified in ETSI TS 103 175 [3]

The GeoNetworking protocol (see ETSI EN 302 636-4-1 [1]) over the ITS-G5 access technology (see ETSI EN 302 663 [2]) provides the DCC functionality over ITS-G5 access technology (DCC_NET). DCC_NET shall support the following functionality:

- maintain DCC state variables as specified in clause 5.2;
- periodically calculate the global Channel Busy Ratio CBR_G as specified in clause 5.3;
- process and provide DCC-related information to the DCC_CROSS entity as specified in clause 5.4;
- store and maintain DCC-related information using the Location Table Entry Extension for ITS-G5 (LocTEX-G5) as specified in clause 6.2;
- transmit and receive DCC-related information to other GeoNetworking routers using the extensions for GeoNetworking packet handling as specified in clause 7.2.

In addition, DCC_NET may provide DCC-related information to the GN forwarding algorithm as specified in annex C.

5.2 Maintenance of DCC variables

If DCC_NET is present, it shall maintain the following DCC variables:

- $CBR_{L_0_Hop}$,
- $CBR_{L_1_Hop}$,
- $CBR_{L_2_Hop}$,
- $CBR_{R_0_Hop}$,
- $CBR_{R_1_Hop}$,
- CBR_G , and
- CBR_{Target} .

The CBR variables are described in detail in table 1.

Table 1: Description of DCC variables in DCC_NET

Parameter	Description
$CBR_{L_0_Hop}$	Measured local channel busy ratio CBR, disseminated to neighbouring ITS-S as $CBR_{R_0_Hop}$. The local CBR measurement is performed in the access layer and specified in ETSI TS 102 687 [4].
$CBR_{L_1_Hop}$	$CBR_{L_1_Hop}$ is the maximum $CBR_{R_0_Hop}$ value received from a neighbouring ITS-S in a given T_{Cbr} interval, i.e. it is the 1-hop channel busy ratio. It is subsequently disseminated to neighbours as $CBR_{R_1_Hop}$.
$CBR_{L_2_Hop}$	$CBR_{L_2_Hop}$ is the maximum $CBR_{R_1_Hop}$ value received from a neighbouring ITS-S in a given T_{Cbr} interval, i.e. it is the 2-hop channel busy ratio. It is calculated locally and not disseminated directly by an ITS-S.
$CBR_{R_0_Hop}$	Disseminated (measured) local channel busy ratio ($CBR_{L_0_Hop}$), i.e. $CBR_{L_0_Hop}$ becomes $CBR_{R_0_Hop}$ when disseminated. At the receiving ITS-S, it becomes $CBR_{L_1_Hop}$.
$CBR_{R_1_Hop}$	Disseminated 1-hop channel busy ratio ($CBR_{L_1_Hop}$), i.e. $CBR_{L_1_Hop}$ becomes $CBR_{R_1_Hop}$ when disseminated. At the receiving ITS-S it becomes $CBR_{L_2_Hop}$.
CBR_G	Global channel busy ratio at ego ITS-S, used in the DCC algorithm (maximum over $CBR_{L_0_Hop}$, $CBR_{L_1_Hop}$ and $CBR_{L_2_Hop}$), see clause 5.3.
CBR_{Target}	Intended global channel busy ratio that DCC tries to achieve. CBR_{Target} is constant and its value shall be the same at DCC_NET and DCC_ACC.

The DCC variables $CBR_R_0_Hop$ and $CBR_R_1_Hop$ are per ITS-S in the location table (see clause 6.2 "Location table extensions for ITS-G5" in the present document), i.e. for every ITS-S, i , in the location table:

- $CBR_R_0_Hop(i)$ is the remote $CBR_L_0_Hop$ received from i ,
- $CBR_R_1_Hop(i)$ is the remote $CBR_L_1_Hop$ received from i .

5.3 Calculation of the global channel busy ratio CBR_G

To calculate CBR_G , the following steps shall be executed at every T_Trig :

The value of T_Trig equals the GeoNetworking protocol constant `itsGNCBRGTriggerInterval`. Within the trigger interval T_Trig , all ITS-S shall start with a random time offset.

The values of $CBR_L_1_Hop(0)$ and $CBR_L_2_Hop(0)$ shall be initialized to 0.

NOTE: The time offset prevents that all ITS-Ss to trigger the calculation of CBR_G at the same time.

Step 1: Calculate the average of $CBR_R_0_Hop(i)$, i.e. (1)

$$\overline{CBR_R_0_Hop} = \frac{1}{n_0} \sum_i CBR_R_0_Hop(i) \forall i \text{ where } CBR_R_0_Hop(i) \text{ is not older than } T_cbr$$

where n_0 is the total number of the $CBR_R_0_Hop$ entries that are not outdated (older than T_Cbr)

Step 2: If $\overline{CBR_R_0_Hop} > CBR_target$ (2)

$CBR_L_1_Hop := \max_i \{ CBR_R_0_Hop(i) \}$ during the last CBR lifetime T_Cbr

Else

Set $CBR_L_1_Hop$ to the second largest $CBR_R_0_Hop(i)$ during the last CBR lifetime T_Cbr

Step 3: Calculate the average of $CBR_R_1_Hop(i)$, i.e. (3)

$$\overline{CBR_R_1_Hop} = \frac{1}{n_1} \sum_i CBR_R_1_Hop(i) \forall i \text{ where } CBR_R_1_Hop(i) \text{ is not older than } T_cbr$$

where n_1 is the total number of the $CBR_R_1_Hop$ entries that are not outdated (older than T_Cbr)

Step 4: If $\overline{CBR_R_1_Hop} > CBR_target$ (4)

$CBR_L_1_Hop := \max_i \{ CBR_R_0_Hop(i) \}$ during the last CBR lifetime T_Cbr

Else

Set $CBR_L_1_Hop$ to the second largest $CBR_R_0_Hop(i)$ during the last CBR lifetime T_Cbr

Step 5: Calculate the global channel busy ratio CBR_G (5)

$$CBR_G(n) = \max (CBR_L_0_Hop (n-1), CBR_L_1_Hop (n), CBR_L_2_Hop (n))$$

where n corresponds to the n th trigger interval, T_trig

The CBR_G value is passed from the DCC_NET entity to the DCC_CROSS entity (see clause 5.4) and input to the DCC algorithm running at the access layer as specified in ETSI TS 102 687 [4].

5.4 DCC_NET

As specified in ETSI TS 103 175 [3], clause 5.3 "DCC_NET", if GeoNetworking over ITS-G5 is used, a DCC_NET entity shall be present.