
**Robots and robotic devices —
Coordinate systems and motion
nomenclatures**

*Robots et composants robotiques — Systèmes de coordonnées et
nomenclatures de mouvements*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 9787:2013](https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013)

<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 9787:2013

<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General rules for coordinate systems and motion nomenclature	3
4.1 Right-hand coordinate systems	3
4.2 Translations	3
4.3 Rotations	3
4.4 Nomenclature for manipulator axes	4
5 Coordinate systems	4
5.1 World coordinate system, $O_0 - X_0 - Y_0 - Z_0$	4
5.2 Base coordinate system, $O_1 - X_1 - Y_1 - Z_1$	4
5.3 Mechanical interface coordinate system, $O_m - X_m - Y_m - Z_m$	5
5.4 Tool coordinate system (TCS), $O_t - X_t - Y_t - Z_t$	6
5.5 Mobile platform coordinate system, $O_p - X_p - Y_p - Z_p$	7
5.6 Task coordinate system, $O_k - X_k - Y_k - Z_k$	7
5.7 Object coordinate system, $O_j - X_j - Y_j - Z_j$	8
5.8 Camera coordinate system, $O_c - X_c - Y_c - Z_c$	8
Annex A (informative) Examples of coordinate systems for different mechanical structures	9
Bibliography	12

ISO 9787:2013

<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 9787 was prepared by Technical Committee ISO/TC 184, *Automation systems and integration*, Subcommittee SC 2, *Robots and robotic devices*.

This third edition of ISO 9787 cancels and replaces the second edition (ISO 9787:1999), which has been technically revised. In particular, the scope has been expanded to include robots operating in both industrial and non-industrial environments.

iteh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 9787:2013](https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013)

<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>

Introduction

This International Standard is one of a series of International Standards dealing with robots and robotic devices, which cover topics including vocabulary, safety, presentation of characteristics, performance criteria and related test methods, and mechanical interfaces. The series of International Standards dealing with robots and robotic devices are interrelated and are related to other International Standards.

[Annex A](#) provides examples of applications for different mechanical structures.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 9787:2013](#)

<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 9787:2013](#)

<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>

Robots and robotic devices — Coordinate systems and motion nomenclatures

1 Scope

This International Standard defines and specifies robot coordinate systems. It also provides nomenclature, including notations, for the basic robot motions. It is intended to aid in robot alignment, testing, and programming.

This International Standard applies to all robots and robotic devices as defined in ISO 8373.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8373:2012, *Robots and robotic devices — Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 8373 and the following apply.

3.1

configuration

set of all joint values that completely determines the shape of the robot at any time

[SOURCE: ISO 8373:2012, 3.5]

3.2

base mounting surface

connection surface between the arm and its supporting structure

[SOURCE: ISO 8373:2012, 3.9]

3.3

mobile platform

assembly of all components of the mobile robot which enables locomotion

[SOURCE: ISO 8373:2012, 3.18, modified — Notes 1 and 2 have been removed.]

3.4

world coordinate system

stationary coordinate system referenced to earth, which is independent of the robot motion

[SOURCE: ISO 8373:2012, 4.7.1]

3.5

base coordinate system

coordinate system referenced to the base mounting surface

[SOURCE: ISO 8373:2012, 4.7.2]

3.6

mechanical interface coordinate system

coordinate system referenced to the mechanical interface

[SOURCE: ISO 8373:2012, 4.7.3]

3.7

tool coordinate system

TCS

coordinate system referenced to the tool or to the end effector attached to the mechanical interface

[SOURCE: ISO 8373:2012, 4.7.5]

3.8

working space

space which can be swept by the wrist reference point increased by the range of rotation or translation of each joint in the wrist

[SOURCE: ISO 8373:2012, 4.8.4]

3.9

tool centre point

TCP

point defined for a given application with regard to the mechanical interface coordinate system

[SOURCE: ISO 8373:2012, 4.9]

3.10

mobile platform origin

mobile platform reference point

origin point of the mobile platform coordinate system

[SOURCE: ISO 8373:2012, 4.11]

ITeH STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>

3.11

task coordinate system

coordinate system referenced to the site of the task, denoted by $O_k - X_k - Y_k - Z_k$

[SOURCE: ISO 14539:2000, 3.3.5]

3.12

object coordinate system

coordinate system referenced to the object, denoted by $O_j - X_j - Y_j - Z_j$

[SOURCE: ISO 14539:2000, 3.3.6]

3.13

camera coordinate system

coordinate system referenced to the sensor which monitors the site of the task, denoted by $O_c - X_c - Y_c - Z_c$

Note 1 to entry: A vision system may be installed to detect the position and orientation of arbitrarily placed objects.

[SOURCE: ISO 14539:2000, 3.3.7]

3.14

grasp-type gripper

gripper that handles an object with finger(s)

[SOURCE: ISO 14539:2000, 4.1.2.1]

4 General rules for coordinate systems and motion nomenclature

4.1 Right-hand coordinate systems

All coordinate systems described in this International Standard are defined by the orthogonal right-hand rule as shown in [Figure 1](#).

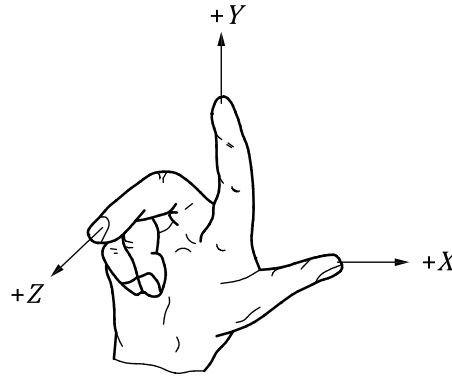


Figure 1 — Right-hand coordinate system

4.2 Translations

Translations along X , Y , and Z axes are expressed in the following way:

+ or $-x$ along X axis;

+ or $-y$ along Y axis;

+ or $-z$ along Z axis.

iTech STANDARD PREVIEW
(standards.iteh.ai)
ISO 9787:2013
<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>

4.3 Rotations

Rotations about X , Y , and Z axes are expressed in the following way:

+ or $-A$ about X axis;


+ or $-B$ about Y axis;

+ or $-C$ about Z axis.

A , B and C are also called roll, pitch and yaw, respectively.

Positive A , B and C are in the directions to advance right-hand screws in the positive X , Y and Z directions, respectively (see [Figure 2](#)).

General rotations are expressed by the combination of individual rotations.

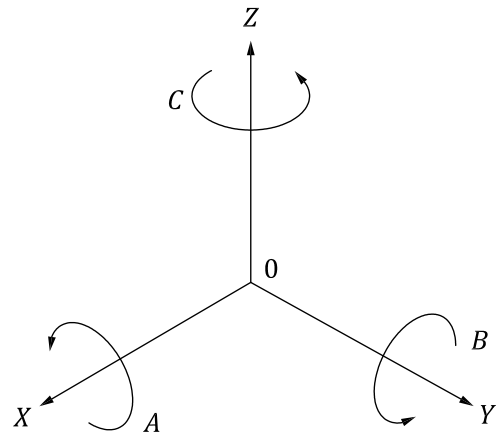

Key

- A roll
- B pitch
- C yaw

Figure 2 — Rotations

4.4 Nomenclature for manipulator axes

If the axes are numerically designated, axis 1 shall be the first motion closest to the base mounting surface, axis 2 the second motion, and so on, and axis *m* the motion to which the mechanical interface is attached.

NOTE Examples are given in [Annex A](#).

iteh STANDARD PREVIEW
 (standards.iteh.ai)
 ISO 9787:2013
<https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-f4ef3b2f6e82/iso-9787-2013>

5 Coordinate systems

5.1 World coordinate system, $O_0 - X_0 - Y_0 - Z_0$

The origin of the world coordinate system, O_0 , shall be defined by the users in accordance with their requirements. The $+Z_0$ axis is collinear but in the opposite direction to the acceleration of gravity vector. The $+X_0$ axis shall be defined by the users in accordance with their requirements (see [Figure 3](#)).

5.2 Base coordinate system, $O_1 - X_1 - Y_1 - Z_1$

The origin of the base coordinate system, O_1 , shall be defined by the manufacturer of the robot. The $+Z_1$ axis is in the direction of the mechanical structure of the robot perpendicularly away from the base mounting surface. The $+X_1$ axis points away from the origin and passes through the projection of the centre of the working space, C_w , onto the plane of the base mounting surface (see [Figures 3](#) and [4](#)). When the robot configuration precludes this convention, the direction of the $+X_1$ axis shall be defined by the manufacturer.

NOTE Examples of the base and mechanical interface coordinate systems are given in [Annex A](#).

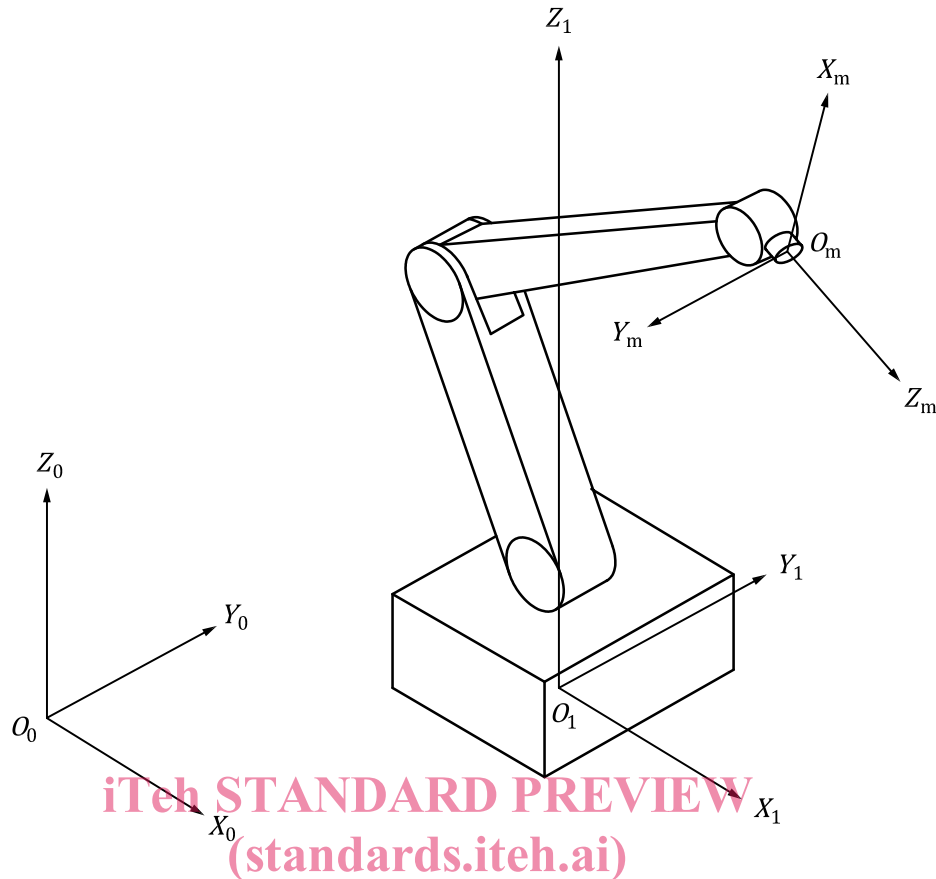


Figure 3 — Examples of coordinate systems

ISO 9787:2013

[https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-](https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-1a71e85c7231-iso-9787-2013)

[1a71e85c7231-iso-9787-2013](https://standards.iteh.ai/catalog/standards/sist/49f6968f-f6fb-408f-af06-1a71e85c7231-iso-9787-2013)

5.3 Mechanical interface coordinate system, O_m - X_m - Y_m - Z_m

The origin of the mechanical interface coordinate system, O_m , is the centre of the mechanical interface. The $+Z_m$ axis points perpendicularly away from the mechanical interface. The $+X_m$ axis is defined as the line parallel to the $+Z_1$ ($+X_1$) axis with the mechanical interface aligned parallel to the plane $Y_1 Z_1$ ($X_1 Y_1$) and the robot primary and secondary axes nearest their mid-positions. When the robot configuration precludes this convention, the position of the primary axes shall be defined by the manufacturer (see [Figure 3](#)).

NOTE Examples of the base and mechanical interface coordinate systems are given in [Annex A](#).