



Designation: ~~D6251/D6251M-01~~ Designation: D 6251/D 6251M – 07^{ε2}

Standard Specification for Wood-Cleated Panelboard Shipping Boxes¹

This standard is issued under the fixed designation D 6251/D 6251M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

^{ε1} NOTE—Sections 4.1.3 and 6.2.3 were editorially corrected in August 2007.

^{ε2} NOTE—Section 2 was editorially corrected in March 2008.

1. Scope

1.1 This specification covers the fabrication and closure of empty and full wood-cleated, hereafter referred to as wood-cleated, panelboard boxes. These boxes are intended for use as containers for domestic and overseas shipment of general materials and supplies, not exceeding 1000 lb [454 kg] depending on box type (see 10.1).

1.2 Wood-cleated panelboard shipping box performance is dependent on its fabricated components and subsequent assembly; therefore, a variety of types, classes, styles, and treatments reflecting varied performance are specified. This specification, however, does not cover wood-cleated panelboard box performance under all atmospheric, handling, shipping, and storage conditions.

1.3 If the use of other construction methods or techniques is acceptable and permitted (see 5.1.17), the resulting packaging systems shall be of equal or better performance than would result from the use of these specified materials and procedures. The appropriate distribution cycle, specified in Practice D 4169, can be used to develop comparative procedures and criteria.

1.4 The values stated in either inch-pound units or SI units are to be regarded separately as standard. Within the text, the SI units are shown in brackets. The values stated in each system are not exact equivalents; therefore, each system must be used independently of the other. Combining values from the two systems may result in nonconformance with the standard. See IEEE/ASTM SI 10 for conversion of units.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of the standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

D 996 Terminology of Packaging and Distribution Environments

D 1990 Practice for Establishing Allowable Properties for Visually-Graded Dimension Lumber from In-Grade Tests of Full-Size Specimens

D 3951 Practice for Commercial Packaging

D 3953 Specification for Strapping, Flat Steel and Seals

D 4169 Practice for Performance Testing of Shipping Containers and Systems

D 4727/D 4727M Specification for Corrugated and Solid Fiberboard Sheet Stock (Container Grade) and Cut Shapes

D 6199 Practice for Quality of Wood Members of Containers and Pallets

F 1667 Specification for Driven Fasteners: Nails, Spikes, and Staples

IEEE/ASTM SI 10 Standard for Use of the International System of Units (SI): The Modern Metric System

2.2 Federal Specifications:

A-A-58078 Plastic Board (For Packaging Applications)³

FF-F-133 Fasteners, Wood Joint, Corrugated – (Saw Edge)³

2.3 Code of Federal Regulations:

CFR Parts 107-180 Title 49, Hazardous Materials Regulations⁴

2.4 APA—The Engineered Wood Association:

¹ This specification is under the jurisdiction of ASTM Committee D10 on Packaging and is the direct responsibility of Subcommittee D10.12 on Shipping Containers, Crates, Pallets, Skids, Skids and Related Structures.

Current edition approved Oct. 10, 2001–June 1, 2007. Published December 2001–July 2007. Originally published as D6251/D6251M-98 approved in 1998. Last previous edition approved in 2001 as D 6251/D 6251M – 001.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from the Federal Supply Service Bureau, Specification Section, Suite 8100, 480 L'Enfant Plaza, SW, Washington, DC 20408.

⁴ Available from the Federal Supply Service Bureau, Specification Section, Suite 8100, 480 L'Enfant Plaza, SW, Washington, DC 20408.



PRP-108 Performance Standards and Policies for Structural-Use Panels⁴
~~PS1-95 Construction and Industrial Plywood⁶~~
~~PS2-92 Performance Standard for Wood-Based Structural-Use Panels^{6,5}~~

2.5 ~~American Wood Preservers' Association (AWPA): American Wood Protection Association (AWPA):~~

~~P8-99 Standard for Oil-Borne Preservatives⁶~~

~~P9-98 Standards for Solvents and Formulations for Organic Preservative Systems⁶~~

2.6 *Hardwood Plywood and Veneer Association:*

~~HPVA HP-1-1994 Hardwood and Decorative Plywood~~

ANSI/HPVA HP-1-2004 American National Standard for Hardwood and Decorative Plywood⁷

2.7 ~~National Lumber Grades Authority (NLGA):~~

~~Standard Grading Rules for Canadian Lumber, 1996 Edition, Printed Dec. 1, 1997—National Institute of Standards and Technology (NIST):~~

~~PS 1-07 Structural Plywood⁵~~

~~PS 2-04 Performance Standard for Wood-Based Structural-Use Panels⁵~~

~~PS 20-05 American Softwood Lumber Standard⁸~~

2.8 *National Hardwood Lumber Association (NHLA):*

Rules for the Measurement and Inspection of Hardwood and Cypress⁹

2.9 *National Motor Freight Traffic Association:*

National Motor Freight Classification¹⁰

2.9 ~~Northeastern Lumber Manufacturers' Association (NELMA):~~

~~Standard Grading Rules: NELMA~~

2.10 *Northern Softwood Lumber Bureau (NSLB):*

~~Standard Grading Rules: NSLB~~

2.11 *Southern Pine Inspection Bureau (SPIB):*

~~1994 Grading Rules for Southern Yellow Pine~~

2.12 *Uniform Classification Committee Standard:*

~~Uniform Freight Classification~~

2.13 *West Coast Lumber Inspection Bureau (WCLIB):*

~~Standard Grading Rules Number 17—WCLIB~~

2.14 *Western Wood Products Association (WWPA):*

~~Western Lumber Grading Rules—98~~

Uniform Freight Classification¹¹

3. Terminology

3.1 General definitions for packaging and distribution environments are found in Terminology D 996.

4. Classification

4.1 *Type* (see 4.3):

4.1.1 *Type I*—Corrugated plastic.

4.1.2 *Type II*—Corrugated and solid fiberboard.

4.1.3 *Type III*—Plywood and oriented strand board (OSB) (only Style A, B, I, and J).—~~Plywood.~~

4.1.4 *Type IV*—Oriented strand board (OSB) (only Style A, B, I, and J).

4.2 *Class:*

4.2.1 *Class 1*—Domestic (see 10.1.1).

4.2.2 *Class 2*—Overseas (see 10.1.2).

4.3 *Style* (see Fig. 1 and 10.1):

⁴ Available from the Superintendent of Documents, US Government Printing Office, Mail Stop: SSOP, Washington, DC 20402-9328.

⁵ Available from the Superintendent of Documents, US Government Printing Office, Mail Stop: SSOP, Washington, DC 20402-9328.

⁶ Available from APA—The Engineered Wood Association, 7011 South 19th Street, Tacoma, WA 98466, <http://www.apawood.org>.

⁶ Available from APA—The Engineered Wood Association, 7011 South 19th Street, P.O. Box 11700, Tacoma, WA 98411-0700.

⁶ Available from American Wood Protection Association (AWPA), P.O. Box 361784, Birmingham, AL 35236-1784, <http://www.awpa.org>.

⁷ Available from American Wood Preservers' Association, P.O. Box 5690, Granbury, TX 76049.

⁷ Available from Hardwood Plywood and Veneer Association (HPVA), P.O. Box 2789, Reston, VA 22090-0789, <http://www.hpva.org>.

⁸ Available from Hardwood Plywood and Veneer Association, P.O. Box 2789, Reston, VA 22090-0789, American National Standards Institute (ANSI) adopted.

⁸ Available from American Lumber Standards Committee (ALSC), P.O. Box 210, Germantown, MD 20875-0210, <http://www.alsc.org>.

⁹ Available from National Lumber Grades Authority, #406-960 Quayside Drive, New Westminster, B.C., Canada, V3M6G2.

⁹ Available from National Hardwood Lumber Association (NHLA), 6830 Raleigh LaGrange Rd., Memphis, TN 38134, <http://www.natllhardwood.org>.

¹⁰ Available from National Motor Freight Traffic Association, American Trucking Associations, 2200 Mill Road, Alexandria, VA 22314.

¹⁰ Available from National Motor Freight Traffic Association (NMFTA), 1001 N. Fairfax St., Suite 600, Alexandria, VA 22314, <http://www.nmfta.org>.

¹¹ Available from Northeastern Lumber Manufacturers Association (NELMA), 272 Tuttle Road, P.O. Box 87A, Cumberland, ME 04021.

¹¹ Available from the Uniform Classification Committee, Tariff Publishing Officer, 151 Ellis St. N.E., Suite 200, Atlanta, GA 30335-6021.

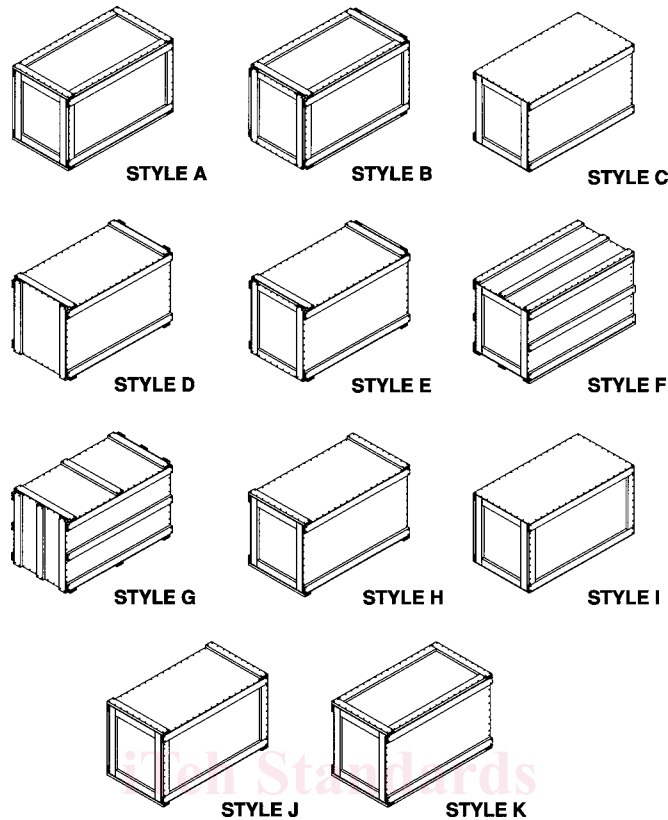


FIG. 1 Styles of Cleated Panel Boxes

4.3.1 *Style A*—Standard box corner (see Fig. 2).

4.3.2 *Style A1*—Type I and II, *Style A*, modified with skids and when specified (see 5.1.3) unnailed top panel closure (see 4.6 and Fig. 3).

4.3.3 *Style B*—Interlocking three-way corners (see Fig. 4).

4.3.4 *Style C through K*—Limited only to Type II, Class 1 (see 5.1.2 and Fig. 1).

4.3.5 *Style A, B, I, and J*—Type III limited only to these styles (see 5.1.2 and Fig. 1)

4.4 *Water-Repellent Wood Preservative* (see 5.1.13):

4.4.1 *Treatment A*— Without water-repellent wood preservative.

4.4.2 *Treatment B*— With water-repellent wood preservative.

4.5 *Load Type* (see 5.1.19 and 10.2):

4.5.1 *Type 1*—Easy.

4.5.2 *Type 2*—Average.

4.5.3 *Type 3*—Difficult.

4.6 *Unnailed Top Panel Closure Option*—When specified (see 4.3.2 and 5.1.3), Type I and II, *Style A1*, or Type III and Type IV, *Style A* or B shall have the top panel modified (see 7.1.8) and closed with flat steel strapping as specified in the Supplemental Requirements. Securing the top panel to the box with other than flat steel strapping shall be prohibited.

4.7 *Part Number*— If required, a specification part number for boxes described in this specification can be formulated (see S3.3).

5. Ordering Information

5.1 Purchasers shall select the preferred permitted options and include the following information in procurement documents:

5.1.1 Specification title, number, and date.

5.1.2 Box type, class, style, preservative treatment, load type, and closure required (see 4.1-4.6, and 6.5).

5.1.3 When Type I and II, *Style A1*; or Type III and IV, *Style A* or B, unnailed top panel closure is required (see 4.3, 4.6, and 7.1.8).


5.1.4 Contents weight (see Tables 2-1-98).

5.1.5 Cleat lumber quality classification required (see 6.3).

5.1.6 Lumber quality used for skid fabrication (see 6.3).

5.1.7 Intermediate cleat requirements for Type III and IV, Class 1 and Class 2, *Style I* and *J* (see 7.2.2).

5.1.8 When skids are not required for boxes with gross weights of 200 lb [91 kg] or 100 lb [45 kg] with dimensions of 48 by

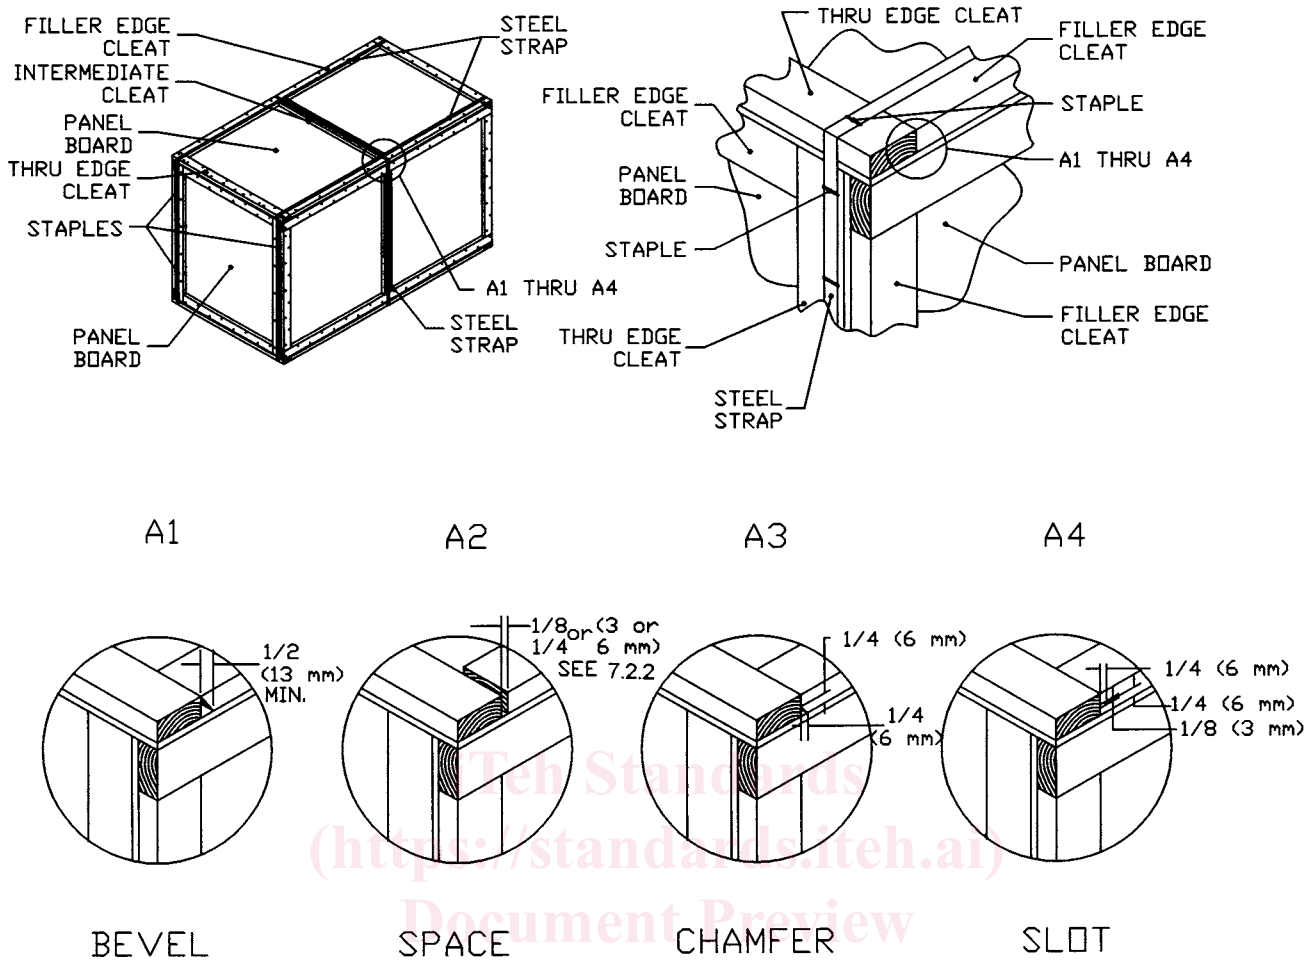

A - FILLER AND INTERMEDIATE CLEAT ENDS AND RELATION TO THROUGH EDGE CLEATS

FIG. 2 Style A Box

24 in. [1219 by 610 mm] or more (see 7.7.2).

5.1.9 When beveled skids are required (see 7.7.2).

5.1.10 When four-way entry skids are required and when 3½ by 4-in. [89 by 102-mm] built-up skids are required (see 7.7.3).

5.1.11 Whether container manufacturer's identification is required (see 7.8).

5.1.11.1 Whether modifications to container manufacturer's identification are required (see 7.8.6).

5.1.12 Box dimensions (inside measurements, panel to panel) specified in order of length by width by depth (see 7.5).

5.1.13 When water-repellent wood preservative treatment is required for plywood and cleats (see 4.4 and 6.5).

5.1.14 Whether boxes are to be shipped assembled or knocked-down (see 9.1).

5.1.15 When Class 1 boxes require external strapping (see S1.1).

5.1.15.1 When Class 2 boxes do not require strapping (see S1.1).

5.1.16 When seal joint specimens are required prior to strapping operations (see S3.1.1).

5.1.17 Whether other construction methods or techniques are acceptable and permitted (see 1.3).

5.1.17.1 Whether proof is required that other construction methods or techniques are acceptable (see 1.3).

5.1.18 Whether sanded plywood and cleats are required (see 6.2.3-26.2.3 and 6.5.3).

5.1.19 Load type (see 4.5).

5.1.20 Whether alternate fastening systems to secure the cleated box panels together are allowed (see 6.4.6).

6. Materials and Manufacture

6.1 *Materials*—It is encouraged that recycled material be used when practical. All recovered, recycled, or virgin materials used in the box manufacture shall meet the requirements of this specification and referenced documents. In addition, materials shall not affect or be affected by the product being packed. Type II panelboard shall have no more than 40 % post consumer recovered material.

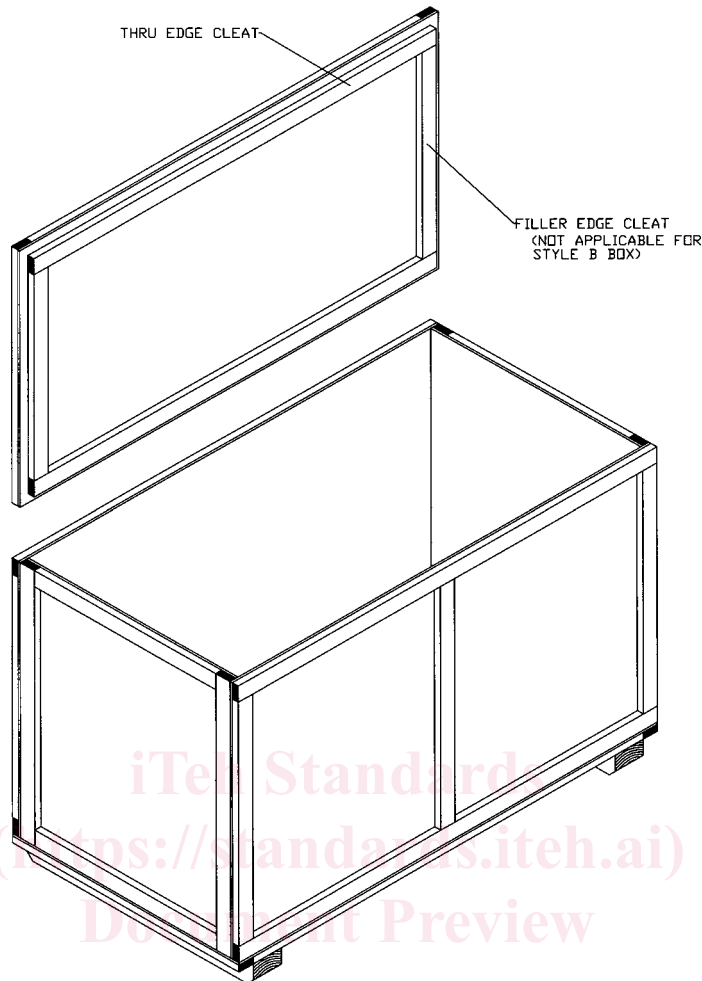


FIG. 3 Unnailed Top Panel Closure

6.2 *Panelboard*—Panelboard shall be as specified (5.1.2).

6.2.1 *Type I*—Panelboard shall be polyethylene, containing ½ % ultraviolet (UV) inhibitor and shall conform to A-A-58078, Type II, or commercial equivalent. The plastic panel basis weight shall be 245 to 255 lb/1000 ft² [1195 to 1245 g/m²].

6.2.2 *Type II*—Panelboard shall be fiberboard conforming to Specification D 4727/D 4727M. Class 1 and Class 2 boxes, singlewall (SW), solid (SF), and V board shall conform to the requirements of 7.1.1.

6.2.3 *Type III*—Panelboard for Class 1 boxes shall conform to HPVA HP-1-1994, Type III, Grade 3-4; or PS1-95, Interior with Exterior Glue, Grade C-D. Panelboard for Class 2 boxes shall conform to HPVA HP-1-1994, Type I, Grade 3-4 or PS1-95, Exterior, Grade C-D.

6.2.3.1 As an alternative, panelboard for Class 1 boxes can also conform to PRP-108, Oriented Strand Board (OSB), Structural I rated sheathing with Exposure 1 designation. The strands shall have a ratio of length to width of approximately 3:1. The strands shall be oriented in one direction in each layer and the strands of one layer shall be perpendicular to the strands in adjacent layers. There shall not be less than three layers in each panel. The strands shall be bonded together with a liquid exterior phenolic or an exterior isocyanate resin. The density of ¾-in. [10 mm] thick OSB panels shall be approximately 39 lb/ft³ [624.7 kg/m³].

6.2.3.2 The plywood thickness shall be specified in Tables 3 and 4. Plywood shall have no defects (knot holes, worm holes, and so forth) extending through more than two panel plies. Unless otherwise specified, plywood shall be unsanded. If smooth finish or sanded panels are required, appropriate sanded grades should be specified in the contract (see—Panelboard for Class 1 boxes shall conform to PS 1-95 Exposure 1 or Exterior panel; or ANSI/HPVA HP-1-2004. Panelboard for Class 2 boxes shall conform to PS 1-95 Exposure 1 or Exterior panel; or ANSI/HPVA HP-1-2004. Unless otherwise specified, plywood shall be unsanded. If smooth finish or sanded panels are required, appropriate sanded grades should be specified in the contract (see 5.1.18). End grain joints shall be prohibited for Grade 4 veneers. When the plywood is specified to be surface treated with water-repellent wood preservative, the treatment shall be as specified in—). The plywood thickness shall be specified in Tables 2 and 3. Plywood shall have no defects (knot holes, worm holes, and so forth) extending through the panel. When the plywood is specified to be surface treated with water-repellant wood preservative, the treatment shall be as specified in 6.5.

6.2.4 *Type IV*—Panelboard for Class 1 boxes shall conform to PS 2-04 Exposure 1 or Exterior panels. Panelboard for Class 2 boxes shall conform to PS 2-04 Exposure 1 or Exterior panels; or ANSI/HPVA HP-1-2004.

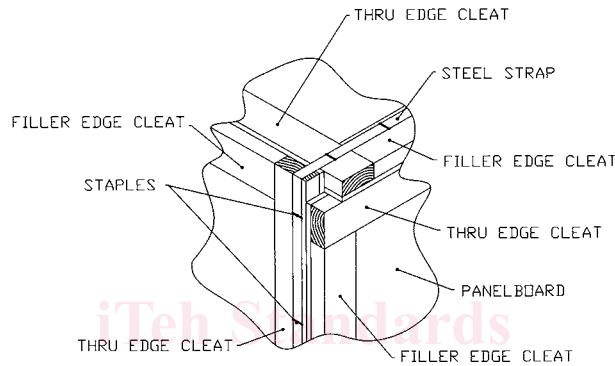
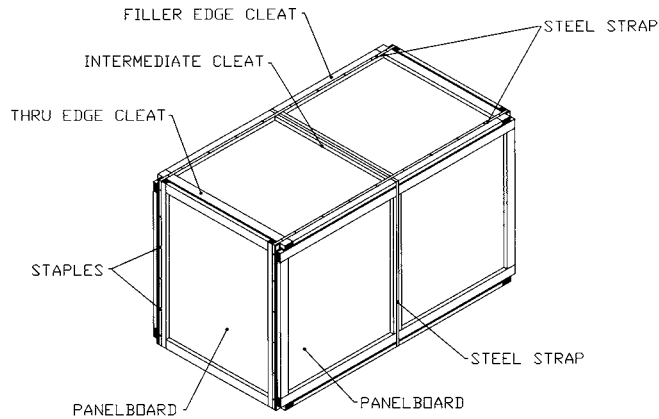


FIG. 4 Style B Box

TABLE-2_1 Type II Corrugated and Solid Fiberboard Requirements

Contents Weight Lb [kg]		Class 1		Class 2
Exceeding	Not Exceeding	CF D SW Grades ^A	SF D Grades ^A	SF Grades ^{A,B}
0	75	200	200	V3S or V4S
[0]	[34]			
75	150	275	275	V3S or V4S
[34]	[68]			
150	200	350	350	V3S or V4S
[68]	[91]			
200	300	350	350	...
[91]	[136]			
300	400	...	500	...
[136]	[181]			

^A As defined in Specification D 4727/D 4727M CF or SF (corrugated or solid fiberboard), D (domestic), SW (single-wall), grades as stated.

^B Class 2 boxes are limited to Style A or B and shall not exceed 48-in. [1219-mm] length, 36-in. [914-mm] width, or 36-in. [914-mm] depth.

6.3 **Lumber**—Lumber for cleats shall conform to Practice D6199, Class 2 (see 7.2) or Table 1, as specified (see—As specified in 5.1.5). Lumber for skids shall conform to Practice D6199, Class 3 or in accordance with Table 1, as specified (see—lumber cleats shall conform to Practice D 6199, Class 2, PS 20-05 or the NHLA Rules. As specified in 5.1.6)—, skids shall conform to Practice D 6199 class 3, PS 20-05 or the NHLA Rules.

6.4 **Fasteners**—Testing is not required for fasteners specified in 6.4.1-6.4.3 when used to join panelboard to wood in panel fabrication.

6.4.1 **Nails**—Nails shall be made of steel wire and shall conform to Specification F 1667 and as specified in 7.1 and 7.4.

6.4.2 **Staples or Wire Stitches**—Staples or wire stitches shall be made of steel wire not less than 0.0625 in. diameter (16 gauge), [1.59 mm]. The crown bearing surface (the underside) shall be not less than 5/16 in. [8 mm] long except that for Type II boxes the bearing surface shall be not less than 1/2 in. [13 mm] long.

6.4.3 **Single-Leg Fasteners**—Single-leg fasteners shall be formed automatically into a nail from sheared off bright, smooth, knurled, or helically fluted low-carbon steel. Medium carbon steel (stiff-stock) minimum 0.072-in. (15-gauge) [1.83-mm] diameter

TABLE 3 2 Type III, Class 1 Plywood Requirements

Contents Weight lb [kg]		Plywood Min Thickness ^A	
Contents Weight lb [kg]		Panel Min Thickness ^A	
Exceeding	Not Exceeding	PS1-95 and PRP-108 ^{B,C,D} in. [mm]	HPVA HP-1-94 ^{B,E} in. [mm]
Exceeding	Not Exceeding	PS1-95, PS 2-04, and PRP-108 ^{B,C,D} in. [mm]	HPVA HP-1-04 ^{B,E} in. [mm]
0	75	5/16 ^{F,G}	1/8
[0]	[34]	[8]	[3.2]
75	150	5/16 ^{F,G}	1/8
[34]	[68]	[8]	[3.2]
150	300	5/16 ^{F,G}	3/16 ^F
[68]	[136]	[8]	[4.8]
300	500	5/16 ^F	3/16
[136]	[227]	[8]	[4.8]
500	800	5/16	1/4
[227]	[363]	[8]	[6.4]
800	1000	3/8	5/16
[363]	[454]	[9.5]	[8]

^A Commercial tolerances shall apply.
^B See 6.2.3.
^C Alternatively low-density plywood conforming to HPVA HP-1-1994 (see 6.2.3) may be used.
^D OSB panelboard conforming to APA PRP-108 or PS- 2-9204 and shall be limited to Style A, B, I, and B J boxes.
^E Low density plywood conforming to HPVA HP-1-94 (see 6.2.3) shall not be used.
^F 3/20 in. [3.8 mm] min. thick plywood conforming to HPVA HP-1-4992004, Type III, Grade 4, may be used in place of the 5/16 in. [8 mm]. (3/20-in. [3.8-mm] thick plywood is not a standard thickness in PS1-95).
^G At the option of the supplier, 1/4-in. [6.4-mm] sanded plywood may be furnished.

wire may also be used. Fasteners are driven subsequently by a special machine at a rapid rate, with sheared-bevel or sheared-square point. For Type I and II boxes, the nail length, before driving, shall be a minimum of 1/8 in. [3 mm] longer than the thickness of the material being joined. For Type III and IV boxes, the nail length, before driving, shall be a minimum of 1/2 in. [13 mm] longer than the thickness of the material being joined. The automatic machine for driving shall be provided with needle-point knives, a J-clinch plate, and a 1/32-in. [1-mm] countersink. Single-leg fasteners shall not be used in joining panelboard to cleats.

6.4.4 *Other Fastenings*— Other single-leg fasteners, preformed or formed from wire, fastenings may be used to the extent specified in 7.1 but must be tested in accordance with 8.1. Steel wire used to form these fasteners shall have a diameter of not less than 0.0625 in. (16 gauge) [1.59 mm]. If wire other than round wire is used, the cross section area shall be equal to that of 0.0625 in. round wire. Fastener points and shanks shall be determined by the test specified in 8.1 for the applicable application and when driven, shall not split the wood members. The fastener withdrawal resistance shall be equal to nails specified in 6.4.1. These fasteners, when used, shall be driven so as to provide a minimum clinch of 1/8 in. [3 mm] and shall not be used with plywood and OSB less than 1/4 in. [6.4 mm] thick.

6.4.5 *Corrugated Fasteners*—Corrugated fasteners shall only be used on Type I and II boxes and shall conform to FF-F-133, FF-F-133, or commercial equivalent, and as specified in 7.1.

6.4.6 *Alternate Fastening Systems* —If the use of alternate fastening systems is acceptable or permitted (see 5.1.20), these systems can be used to secure the box cleated panels together (see 7.6).

6.5 *Water-Repellent Wood Preservative* —Water-repellent wood preservative shall be composed of either a 2 % copper naphthenate, a 3 % zinc naphthenate, or a 1.8 % oxine copper (formerly referred to as copper-8-quinolinolate) solution. Treating solutions shall conform to AWWA Standard P8 or P9.

6.5.1 *Type I and II*— When specified (see 4.4 and 5.1.13) Type I and II boxes shall have the wood cleats treated with a water-repellent wood preservative specified in 6.5 applied by immersion.

6.5.2 *Type III and IV*— Under some conditions of exposure, Type III and IV boxes may become stained and discolored by molds and mildew. Such staining is undesirable when the identification markings may become obscured. Water-repellent preservatives are effective in retarding mildew and similar stains. Type III and IV boxes shall be treated such that the plywood absorbs and OSB absorb not less than 2.2-lb/100 ft² [10.74 kg/100 m²] water-repellent wood preservative.

6.5.3 When sanded plywood and cleats are specified (see 5.1.18, and 6.2.3-2, and 6.2.3), the plywood shall be sanded prior to surface treatment. Wood shall be preserved by immersing in wood preservative for a minimum of three minutes prior to use in panel fabrication. There shall be evidence of discoloration of the plywood and wood cleats when tested in 8.4 for presence of



TABLE 4 3 Type III, Class 2 Plywood Requirements

Contents Weight lb [kg]		Plywood Min Thickness ^A							
		Panel Min Thickness ^A							
		Type 1 and 2 Loads		Type 3 Load		Type 1 and 2 Loads		Type 3 Load	
Exceeding	Not Exceeding	PS1-95 ^{B,C} in. [mm]		HPVA HP-1-94 ^{B,D} in. [mm]		PS1-95 ^{B,C} in. [mm]		HPVA HP-1-94 ^{B,D} in. [mm]	
Exceeding	Not Exceeding	PS1-95, PS 2-04, and PRP-108 ^{B,C} in. [mm]		HPVA HP-1-04 ^{B,D} in. [mm]		PS1-95, PS 2-04, and PRP-108 ^{B,C} in. [mm]		HPVA HP-1-04 ^{B,D} in. [mm]	
		Style		Style		Style		Style	
		A and B	I and J ^E	A and B	I and J ^E	A and B	I and J ^{E,F}	A and B	I and J ^{E,F}
0	100	5/16 ^G	3/8	3/16 ^H	5/16	5/16 ^G	3/8	3/16 ^F	5/16
[0]	[45]	[8]	[9.5]	[4.8]	[8]	[8]	[9.5]	[4.8]	[8]
100	200	5/16 ^G	3/8	3/16 ^H	5/16	5/16 ^G	3/8	3/16	5/16
[45]	[91]	[8]	[9.5]	[4.8]	[8]	[8]	[9.5]	[4.8]	[8]
200	300	5/16 ^G	1/2	3/16	3/8	5/16	15/32	1/4	3/8
[91]	[136]	[8]	[12.7]	[4.8]	[9.5]	[8]	[11.9]	[6.4]	[9.5]
300	400	5/16 ^G	1/2	3/16	3/8	5/16	15/32	1/4	3/8
[136]	[181]	[8]	[12.7]	[4.8]	[9.5]	[8]	[11.9]	[6.4]	[9.5]
400	500	5/16 ^G	1/2	3/16	3/8	5/16	19/32	1/4	1/2
[181]	[227]	[8]	[12.7]	[4.8]	[9.5]	[8]	[15.1]	[6.4]	[12.7]
500	600	5/16	1/2	1/4	3/8	5/16	19/32	1/4	1/2
[227]	[272]	[8]	[12.7]	[6.4]	[9.5]	[8]	[15.1]	[6.4]	[12.7]
600	800	3/8	5/8	5/16	1/2	3/8	19/32	5/16	5/8
[272]	[363]	[9.5]	[15.9]	[8]	[12.7]	[9.5]	[15.1]	[8]	[15.9]
800	1000	3/8	5/8	5/16	1/2	1/2	19/32	3/8	5/8
[363]	[454]	[9.5]	[15.9]	[8]	[12.7]	[12.7]	[15.1]	[9.5]	[15.9]

^A Commercial tolerances shall apply.

^B See 6.2.3.

^C Alternatively low density plywood conforming to HPVA HP-1-1994 (see 6.2.3) may be used.

^D Low density plywood conforming to HPVA HP-1-94 (see 6.2.3) shall not be used.

^E Only Style I and J, top and bottom panels, all other panels as specified for Style A and B.

^F For Air Force shipments, Style I and J contents maximum weight shall be 150 lb [65 kg].

^G At the option of the supplier, 1/4-in. [6.3-mm] sanded plywood may be furnished.

^H 3/20 in. [3.8 mm] min. thick plywood conforming to HPVA HP-1-1994, Type I, Grade 4, may be used in place of the 3/16-in. [4.8-mm] thick plywood. (3/20-in. [3.8-mm] thick plywood is not a standard thickness in PS1-95 or PS 2-04).

TABLE 5 4 Cleat Sizes for Type I Panels

Contents Weight lb [kg]		Class 1 Cleat Size in. [mm] ^A		Class 2 Cleat Size in. [mm] ^A	
Exceeding	Not Exceeding	Min Width	Min Thickness	Min Width	Min Thickness
0	100	1 3/4	3/4	1 3/4	3/4
[0]	[45]	[35]	[16]	[35]	[16]
100	150	1 3/4	3/4	2 1/4	3/4
[45]	[68]	[35]	[16]	[45]	[16]
150	225	2 5/8	3/4	2 5/8	3/4
[68]	[102]	[54]	[16]	[54]	[16]
225	250	3	3/4	3	3/4
[102]	[113]	[64]	[16]	[64]	[16]
250	300	3	3/4	3	3/4
[113]	[136]	[64]	[16]	[64]	[16]
300	350	3	3/4	3	3/4
[136]	[159]	[64]	[16]	[64]	[16]
350	400	3	3/4	3	3/4
[159]	[181]	[64]	[16]	[64]	[16]
400	500	3	3/4
[181]	[227]	[64]	[16]

^A Practice D 6199 dimension requirements apply.

preservative. The preservative shall be dry prior to assembling cleats to the panelboard or painting the cleats (see 6.5.5). When boxes are painted, wood preservation shall be accomplished prior to paint application.

6.5.4 In general, the copper naphthenate solution is the preferred wood preservative unless end items to be packaged in these boxes are food items not packaged in sealed metal cans or materials which might be adversely effected by residual solvents from the wood preservative. The purchaser should be consulted if there is a question concerning the appropriate wood preservative (see 5.1.2).

6.5.5 *Preservative Dryness*—Boxes, or box parts, shall be dried prior to assembling or painting after water-repellent wood preservative is applied. There shall be an absence of discoloration when tested as specified in 8.4.3.

TABLE 6 5 Cleat Sizes for Type II Panels

Class 1					
Box Style	Contents Weight lb [kg]		Min Cleat Size, min ^A		
	Exceeding	Not Exceeding	Thickness		Width
			Group I and II Woods in. [mm]	Group III and IV Woods in. [mm]	All Groups of Woods in. [mm]
C thru K	0 [0]	75 [34]	1/16 [16]	5/8 [14]	1 1/2 [32]
C thru K	74 [35]	150 [68]	3/4 [16]	1 1/16 [16]	1 11/16 [37]
A and B	0 [0]	75 [34]	5/8 [14]	9/16 [13]	1 1/2 (32)
A and B	75 [34]	150 [68]	1 1/16 [16]	5/8 [14]	1 11/16 [37]
A and B	150 [68]	300 [136]	3/4 [16]	1 1/16 [16]	1 3/4 [35]
A and B	300 [136]	400 [181]	1 [19]	1 3/16 [16]	1 3/4 [35]

Class 2				
Box Style	Contents Weight lb [kg]		Cleat Min Size for all Wood Groups in. [mm] ^A	
	Exceeding	Not Exceeding	Thickness, min	Width, min
A or B Only	0 [0]	200 [91]	3/4 [16]	1 3/4 [35]

^A Practice D 6199 dimension requirements apply.

TABLE 7 6 Cleat Sizes for Type III, Class 1 Panels

Box Style	Contents Weight lb [kg]		Cleat Size ^{A,B} in. [mm]	
	Exceeding	Not Exceeding	Thickness	Width
	0 [0]	75 [34]	3/4 [16]	1 3/8 [29]
	75 [34]	150 [68]	3/4 [16]	1 3/4 [35]
	150 [68]	300 [136]	3/4 [16]	1 3/4 [35]
	300 [136]	500 [227]	3/4 [16]	1 3/4 [35]
	500 [227]	800 [363]	3/4 [16]	2 1/4 [45]
	800 [363]	1000 [454]	3/4 [16]	2 5/8 [54]

^A Practice D 6199 dimension requirements apply.

^B All wood groups.

7. Construction

7.1 *Panel Fabrication*—Panels shall be fabricated by nailing, stapling, or gluing panelboard to cleats placed as shown in Figs. 1-7 and as specified in 7.2.

7.1.1 *Type I and II Panelboard*—Panelboard material as specified in 6.2.1 and 6.2.2 shall be joined to cleats by fasteners or adhesives to make a panel for a box to carry contents weight as specified in Table 1. Panelboard for one and two piece panels shall be as specified in 7.1.4-7.1.6. The contents weight for Type I panel boxes shall not exceed 500 lb [227 kg] for Class 1 nor more than 400 lb [181 kg] for Class 2. The contents weight for Type II boxes shall not exceed 400 lb [181 kg] for Class 1 nor more than 200 lb [91 kg] for Class 2. The contents weight for Type III boxes shall not exceed 1000 lb [454 kg] for Class 1 or Class 2. Adhesives shall not be used to secure plastic panelboard to cleats.

7.1.2 *Type III and IV Panelboard*—~~Plywood panelboard~~—Panelboard material as specified in 6.2.3 and 6.2.4 shall be joined to cleats by use of either nails, staples, wire stitches, or other fasteners as specified in 6.4 and Table 8, at the option of the supplier (see Fig. 5, ~~Insert, All Styles Panel Assembly~~), ~~Insert, All Styles Panel Assembly~~). The contents weight for Type III and IV boxes shall not exceed 1000 lb [454 kg] for Class 1 or Class 2.

7.1.3 *Solid Wood Panels*—Solid wood panels may be used when the box panel length or width dimension is equal to less than the sum of three cleat widths. The wood member thickness shall be 1/16 in. [2 mm] greater than that specified for the cleat thickness



TABLE-8 7 Cleat Sizes for Type III, Class 2 Panels

Contents Weight lb [kg]		Edge Cleat Size ^{A,B} in. [mm]	
Exceeding	Not Exceeding	Thickness	Width
0	100	3/4	1 3/4
[0]	[45]	[16]	[35]
100	200	3/4	1 3/4
[45]	[91]	[16]	[35]
200	300	3/4	1 3/4
[91]	[136]	[16]	[35]
300	400	3/4	1 3/4
[136]	[181]	[16]	[35]
400	500	3/4	2 1/4
[181]	[227]	[16]	[45]
500	600	3/4	2 5/8
[227]	[272]	[16]	[54]
600	800	3/4	3 1/4
[272]	[363]	[16]	[70]
800	1000	3/4	3 1/4
[363]	[454]	[16]	[70]

^A Practice D 6199 dimension requirements apply.

^B All wood groups.

TABLE-9 8 Nails and Staples Sizes for Joining Panelboard and Cleats

lb [kg]	Wire Gage [mm]	Nails Diameter Not Less Than		Staples and Other Diameter Not Less Than	All Fasteners Length as Specified ^A	Nails Diameter Not Less Than	Staples and Other Diameter Not Less Than	All Fasteners Length as Specified ^A
		lb [kg]	Wire Gauge [mm]					
in. [mm]	Head in. [mm]							
0 to 150	15	0.072	1 3/64 ^B	as specified	see 6.4 ^B			
[0 to 68]	[1.83]	[1.83]	[5.16]	in 6.4.2,	through			
150 to 1000	14	0.080	1 3/64 ^B	6.4.3, and	6.4.4 ^B			
[68 to 454]	[2.03]	[2.03]	[5.16]	6.4.4 ^C				

^A Fastening plywood to cleats, not less than the plywood and cleat thickness, plus 1/8-in. [3.2 mm].

^B Nail dimensions for Type II, Style C through K shall be not less than 1 in. [25 mm] in length and have not less than 1/4-in. [6.35-mm] head diameter.

^C Staple crown for Type II boxes shall be not less than 1/2 in. [13 mm] long.

for the loads specified in Tables 7 and 8 Tables 6 and 7. When solid wood panels are used, plywood inner facings may be omitted.

7.1.4 *One and Two Piece Panels*—Box bottom panels not exceeding 72 in. [1829 mm] in length or 48 in. [1219 mm] in width, shall consist of a single panelboard piece. Type III and IV, Style I, top and bottom panels, regardless of size, shall consist of a single piece of plywood or OSB. All other panels of Type III and IV, all style boxes, and all Type I and II, Style A, A1, and B, box panels shall consist of one or two panelboard pieces joined by either a lap (see 7.1.5) or butt joint (see 7.1.6 and 7.1.7) as specified. In two piece panels, each panelboard piece shall be not less than 24 in. [610 mm] in length or width. Panelboard joints in adjacent panels shall be not closer than 12 in. [305 mm] of being in line with adjacent parallel joints. Adjacent panels may be designed for assembly with joints running perpendicular to each other.

7.1.5 *Lap Joint*—Adjacent panelboard edges shall be lapped not less than 3 in. [76 mm] and fastened by metal stitches, as specified in 6.4.2, which shall pass through both pieces and are clinched. There shall be not less than two parallel rows of stitches spaced not less than 2 in. [51 mm] apart, and the spacing of stitches in each row shall not exceed 4 in. [102 mm]. Type II, Class 1, fiberboard panelboard lap joints may be firmly joined together with water-resistant adhesive. The fiberboard panel lap joints shall be firmly joined to each other over the entire contact surface area. When tested in accordance with 8.2.3, the fiberboard, or a layer of fiberboard, shall remain in contact with not less than 75 % of the other fiberboard piece contact area. Type III maximum plywood thickness for this type of joint shall be 3/16 in. [5 mm].

7.1.6 *Type I and II Butt Joint*—Adjacent panelboard edges shall be butted at the mid-width of a joint cleat and each pie fastened to the cleat. Fastening panelboard to cleats using metal stitches shall be in accordance with 7.1.5 passing through the fiberboard and into the cleat. When the panelboard joint glued to the cleat, the fiberboard butt joint area shall be glued over the entire surface contact area. When tested in accordance with 8.2.3, the fiberboard, or a layer of fiberboard, shall remain in contact with not less than 75 % of the cleat contact area.

7.1.7 *Type III Butt Joint*—Adjacent panelboard edges shall be butted at the mid-width of a joint cleat specified in 7.1.7.1 or 7.1.7.2 and each piece fastened to the cleat. Fastening shall conform to the panel fabrication requirements of 7.1.2. The joint cleat length shall be not less than the distance between edge cleats –1/8 in. [–3 mm].