
Akustika - Opis, merjenje in ocena hrupa v okolju - 1. del: Osnovne veličine in ocenjevalni postopki

Acoustics -- Description, measurement and assessment of environmental noise -- Part 1: Basic quantities and assessment procedures

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Acoustique -- Description, mesure et évaluation du bruit de l'environnement -- Partie 1: Grandeurs fondamentales et méthodes d'évaluation

<https://standards.iteh.ai/catalog/standards/sist/ab527ade-fl6b-407b-994b-e5099b-flbb7b/sist-iso-1996-1-2016>

Ta slovenski standard je istoveten z: ISO 1996-1:2016

ICS:

13.140	Vpliv hrupa na ljudi	Noise with respect to human beings
17.140.01	Akustična merjenja in blaženje hrupa na splošno	Acoustic measurements and noise abatement in general

oSIST ISO 1996-1:2016**en**

INTERNATIONAL STANDARD

**ISO
1996-1**

Third edition
2016-03-01

Acoustics — Description, measurement and assessment of environmental noise —

Part 1: Basic quantities and assessment procedures

*Acoustique — Description, mesurage et évaluation du bruit de
l'environnement —*

Partie 1: Grandeurs fondamentales et méthodes d'évaluation

SIST ISO 1996-1:2016

<https://standards.iteh.ai/catalog/standards/sist/ab527ade-f16b-407b-994b-e5099bflbb7b/sist-iso-1996-1-2016>



Reference number
ISO 1996-1:2016(E)

© ISO 2016

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 1996-1:2016

<https://standards.iteh.ai/catalog/standards/sist/ab527ade-f16b-407b-994b-e5099bflbb7b/sist-iso-1996-1-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
3.1 Expression of levels	2
3.2 Time intervals	3
3.3 Ratings	4
3.4 Sound designations	4
3.5 Impulsive sound sources	6
3.6 Day, evening, night sound levels	6
4 Symbols	7
5 Descriptors for environmental noise(s)	8
5.1 Single events	8
5.1.1 Descriptors	8
5.1.2 Event duration	8
5.2 Repetitive single events	8
5.3 Continuous sound	9
6 Noise annoyance	9
6.1 Descriptors for community noise	9
6.2 Frequency weightings	9
6.3 Adjusted levels	9
6.3.1 Adjusted sound exposure levels	9
6.3.2 Adjusted equivalent continuous sound pressure level	10
6.4 Rating levels	10
6.4.1 One sound source	10
6.4.2 Combined sources	10
6.5 Composite whole-day rating levels	11
7 Noise limit requirements	11
7.1 General	11
7.2 Specifications	12
7.2.1 Noise descriptors	12
7.2.2 Relevant time intervals	12
7.2.3 Sound sources and their operating conditions	12
7.2.4 Locations	12
7.2.5 Propagation conditions	13
7.2.6 Uncertainties	13
8 Reporting assessments of environmental noise(s) and estimation of long-term community annoyance response	13
8.1 Estimation of long-term annoyance response of communities	13
8.2 Test report	13
Annex A (informative) Adjustments for sound source rating levels	15
Annex B (informative) High-energy impulse sounds	20
Annex C (informative) Sounds with strong low-frequency content	22
Annex D (informative) Relationships to estimate the percentage of a population highly annoyed and the 95 % prediction interval as a function of adjusted day-evening-night and day-night sound levels	24
Annex E (informative) Estimated prevalence of a population highly annoyed as a function of adjusted day-evening-night or day-night sound levels using the community	

ISO 1996-1:2016(E)

tolerance level formulation	26
Annex F (informative) Estimated prevalence of a population highly annoyed as a function of adjusted day-evening-night or day-night sound level using a regression formulation	33
Annex G (informative) Annoyance caused by exposure to sound in multi-source environments	39
Annex H (informative) Theory-based approach to predict the growth of annoyance	41
Bibliography	45

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 1996-1:2016
<https://standards.iteh.ai/catalog/standards/sist/ab527ade-f16b-407b-994b-e5099bflbb7b/sist-iso-1996-1-2016>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 43, *Acoustics*, Subcommittee SC 1, *Noise*.

This third edition cancels and replaces the second edition (ISO 1996-1:2003), which has been technically revised. In particular, the following subclauses and annexes have been added or revised: [3.6](#), [6.3.1](#), [6.5](#), [8.1](#), [8.2.1](#) i), [Annex A](#), [Annex D](#), [Annex E](#), [Annex F](#), [Annex G](#), and [Annex H](#).

ISO 1996 consists of the following parts, under the general title *Acoustics — Description, measurement and assessment of environmental noise*:

- *Part 1: Basic quantities and assessment procedures*
- *Part 2: Determination of sound pressure levels*

ISO 1996-1:2016(E)**Introduction**

To be of practical use, any method of description, measurement, and assessment of environmental noise is intended to be related in some way to what is known about human response to noise. Many adverse consequences of environmental noise increase with increasing noise, but the precise dose-response relationships involved continue to be the subject of scientific debate. In addition, it is important that all methods used be practicable within the social, economic, and political climate in which they are used. For these reasons, there is a very large range of different methods in use around the world for different types of noise, and this creates considerable difficulties for international comparison and understanding.

The broad aim of the ISO 1996 series is to contribute to the international harmonization of methods of description, measurement, and assessment of environmental noise from all sources.

The methods and procedures described in this part of ISO 1996 are intended to be applicable to noise from various sources, individually or in combination, which contribute to the total exposure at a site. At the stage of technology at the time of publication of this part of ISO 1996, the evaluation of long-term noise annoyance seems to be best met by adopting the adjusted A-weighted equivalent continuous sound pressure level, which is termed a “rating level”.

The aim of the ISO 1996 series is to provide authorities with material for the description and assessment of noise in community environments. Based on the principles described in this part of ISO 1996, national standards, regulations, and corresponding acceptable limits for noise can be developed.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 1996-1:2016
<https://standards.iteh.ai/catalog/standards/sist/ab527ade-f16b-407b-994b-e5099bflbb7b/sist-iso-1996-1-2016>

Acoustics — Description, measurement and assessment of environmental noise —

Part 1: Basic quantities and assessment procedures

1 Scope

This part of ISO 1996 defines the basic quantities to be used for the description of noise in community environments and describes basic assessment procedures. It also specifies methods to assess environmental noise and gives guidance on predicting the potential annoyance response of a community to long-term exposure from various types of environmental noises. The sound sources can be separate or in various combinations. Application of the method to predict annoyance response is limited to areas where people reside and to related long-term land uses.

Community response to noise can vary differently among sound sources that are observed to have the same acoustic levels. This part of ISO 1996 describes adjustments for sounds that have different characteristics. The term “rating level” is used to describe physical sound predictions or measurements to which one or more adjustments have been added. On the basis of these rating levels, the long-term community response can be estimated.

The sounds are assessed either singly or in combination, allowing for consideration, when deemed necessary by responsible authorities, of the special characteristics of their impulsiveness, tonality, and low-frequency content, and for the different characteristics of road-traffic noise, other forms of transportation noise (such as aircraft noise), and industrial noise.

This part of ISO 1996 does not specify limits for environmental noise.

NOTE 1 In acoustics, several different physical measures describing sound can have their level expressed in decibels (e.g. sound pressure, maximum sound pressure, and equivalent continuous sound pressure). The levels corresponding to these physical measures normally will differ for the same sound. This often leads to confusion. Therefore, it is necessary to specify the underlying physical quantity (e.g. sound pressure level, maximum sound pressure level, and equivalent continuous sound pressure level).

NOTE 2 In this part of ISO 1996, quantities are expressed as levels in decibels. However, some countries validly express the underlying physical quantity, such as maximum sound pressure, in pascal or sound exposure in pascal-squared seconds.

NOTE 3 ISO 1996-2 deals with the determination of sound pressure levels.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61672-1, *Electroacoustics — Sound level meters — Part 1: Specifications*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO 1996-1:2016(E)

3.1 Expression of levels

NOTE For levels defined in 3.1.1 to 3.1.6, it is essential that frequency weighting or frequency bandwidth, as applicable, be specified, and time weighting, if applicable, be specified.

3.1.1

time-weighted and frequency-weighted sound pressure level

ten times the logarithm to the base 10 of the ratio of the time-mean-square of the sound pressure to the square of a reference value, being obtained with a standard frequency weighting and standard time weighting

Note 1 to entry: Sound pressure is expressed in pascal (Pa).

Note 2 to entry: The reference value is 20 µPa.

Note 3 to entry: Time-weighted and frequency-weighted sound pressure level is expressed in decibels (dB).

Note 4 to entry: The standard frequency weightings are A-weighting and C-weighting as specified in IEC 61672-1, and the standard time weightings are F-weighting and S-weighting as specified in IEC 61672-1.

3.1.2

maximum time-weighted and frequency-weighted sound pressure level

greatest time-weighted and frequency-weighted sound pressure level within a stated time interval

Note 1 to entry: Maximum time-weighted and frequency-weighted sound pressure level is expressed in decibels (dB).

3.1.3

N percentage exceedance level

time-weighted and frequency-weighted sound pressure level that is exceeded for N % of the time interval considered

Note 1 to entry: N percentage exceedance level is expressed in decibels (dB).

EXAMPLE $L_{AF95,1h}$ is the A-frequency-weighted, F-time-weighted sound pressure level exceeded for 95 % of 1 h.

3.1.4

peak sound pressure level

ten times the logarithm to the base 10 of the ratio of the square of the peak sound pressure to the square of the reference value

Note 1 to entry: The reference value is 20 µPa.

Note 2 to entry: Peak sound pressure level is expressed in decibels (dB).

Note 3 to entry: Peak sound pressure should be determined with a detector as defined in IEC 61672-1. IEC 61672-1 only specifies the accuracy of a detector using C-weighting.

Note 4 to entry: The peak sound pressure is the maximum absolute value of the instantaneous sound pressure during a stated time interval.

3.1.5

sound exposure level

L_E
ten times the logarithm to the base 10 of the ratio of the sound exposure, E , being the integral of the square of the sound pressure, p , over a stated time interval or event of duration, T (starting at t_1 and ending at t_2), to a reference value, E_0

$$L_E = 10 \lg \frac{E}{E_0} \text{ dB}$$

where

$$E = \int_{t_1}^{t_2} p^2(t) dt ;$$

$$E_0 = 400 \mu\text{Pa}^2 \text{ s}$$

Note 1 to entry: Sound exposure is expressed in pascal-squared seconds. Sound exposure level is expressed in decibels (dB).

Note 2 to entry: Because of practical limitations of the measuring instruments, p^2 is always understood to denote the square of a frequency-weighted and frequency band-limited sound pressure. If a specific frequency weighting as specified in IEC 61672-1 is applied, this should be indicated by appropriate subscripts; e.g. $E_{A,1 \text{ h}}$ denotes the A-weighted sound exposure over 1 h.

Note 3 to entry: The duration, T , of the integration is included implicitly in the time integral and need not to be reported explicitly. For measurements of sound exposure over a specified time interval, the duration of integration should be reported and the notation should be $L_{E,T}$.

Note 4 to entry: For sound exposure levels of an event, the nature of the event should be stated.

Note 5 to entry: When applied to a single event, the sound exposure level is called “single-event sound exposure level”.

3.1.6

equivalent continuous sound pressure level

$L_{\text{eq},T}$

ten times the logarithm to the base 10 of the ratio of the time-average of the square of the sound pressure, p , during a stated time interval of duration, T (starting at t_1 and ending t_2), to the square of the reference sound pressure, p_0

Note 1 to entry: The A-weighted equivalent continuous sound pressure level is

$$L_{\text{Aeq},T} = 10 \lg \frac{\frac{1}{T} \int_{t_1}^{t_2} p_A^2(t) dt}{p_0^2} \text{ dB}$$

where

$p_A(t)$ is the A-weighted instantaneous sound pressure at running time t ;

p_0 is equal to $20 \mu\text{Pa}$.

Note 2 to entry: The equivalent continuous sound pressure level is also termed “time-averaged sound pressure level”. It is expressed in decibels (dB).

3.2 Time intervals

3.2.1

reference time interval

time interval to which the rating of the sound is referred

Note 1 to entry: The reference time interval may be specified in national or international standards or by local authorities to cover typical human activities and variations in the operation of sound sources. Reference time intervals can be, for example, part of a day, the full day, or a full week. Some countries define even longer reference time intervals.

Note 2 to entry: Different levels or sets of levels may be specified for different reference time intervals.

ISO 1996-1:2016(E)

3.2.2

long-term time interval

specified time interval over which the sound of a series of reference time intervals is averaged or assessed

Note 1 to entry: The long-term time interval is determined for the purpose of describing environmental noise as it is generally designated by responsible authorities.

Note 2 to entry: For long-term assessments and land-use planning, long-term time intervals that represent some significant fraction of a year should be used (e.g. 3 months, 6 months, and 1 year).

3.3 Ratings

3.3.1

adjustment

quantity, positive or negative, constant or variable, that is added to a predicted or measured acoustical level to account for some sound character, the time of day, or the source type

3.3.2

rating level

predicted or measured acoustic level to which an adjustment has been added

Note 1 to entry: Measurements such as day/night sound pressure level or day/evening/night sound pressure level are examples of rating levels because they are calculated from sound measured or predicted over different reference time periods, and adjustments are added to the reference time interval equivalent continuous sound pressure levels based on the time of day.

Note 2 to entry: A rating level may be created by adding adjustments to a measured or predicted level(s) to account for some character of the sound such as tonality or impulsiveness.

Note 3 to entry: A rating level may be created by adding adjustments to a measured or predicted level(s) to account for differences between source types. For example, using road traffic as the base sound source, adjustments may be applied to the levels for aircraft or railway sources.


3.4 Sound designations

NOTE See [Figure 1](#).


3.4.1

total sound

totally encompassing sound in a given situation at a given time, usually composed of sound from many sources near and far

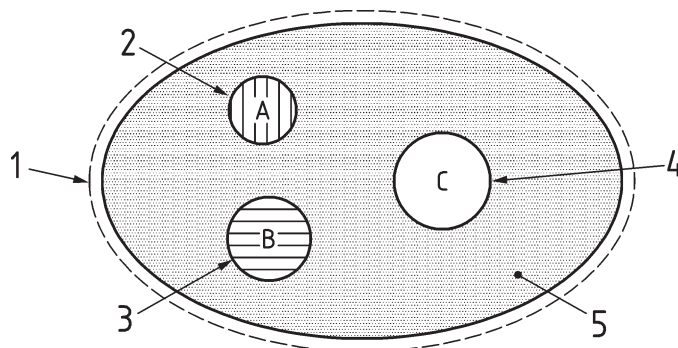

a) Three specific sounds A, B, and C under consideration, the residual sound and the total sound

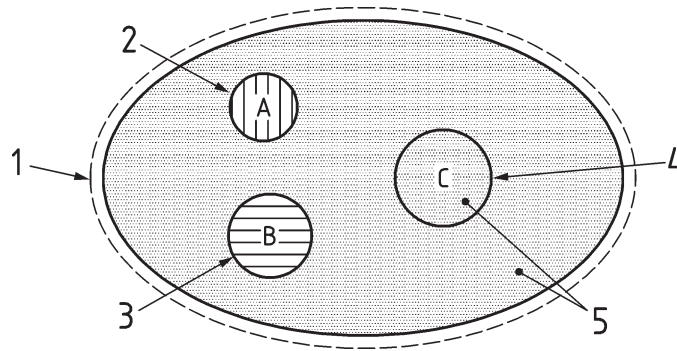

b) Two specific sounds A and B under consideration, the residual sound and the total sound

Key

- 1 total sound
- 2 specific sound A
- 3 specific sound B
- 4 specific sound C
- 5 residual sound

NOTE 1 The lowest residual sound level is obtained when all specific sounds are suppressed.

NOTE 2 The dotted area indicates the residual sound when sounds A, B, and C are suppressed.

NOTE 3 In [Figure 1 b\)](#), the residual sound includes the specific sound C as it is not under consideration.

Figure 1 — Total, specific, and residual sound designations

3.4.2

specific sound

component of the total sound that can be specifically identified and which is associated with a specific source

3.4.3

residual sound

total sound remaining at a given position in a given situation when the specific sounds under consideration are suppressed

3.4.4

initial sound

total sound present in an initial situation before any change to the existing situation occurs

3.4.5

fluctuating sound

continuous sound whose sound pressure level varies significantly, but not in an impulsive manner, during the observation period

3.4.6

intermittent sound

sound that is present at the observer only during certain time periods that occur at regular or irregular time intervals and is such that the duration of each such occurrence is more than about 5 s

EXAMPLE Motor vehicle noise under conditions of small traffic volume, train noise, aircraft noise, and air-compressor noise.

3.4.7

sound emergence

increase in the total sound in a given situation that results from the introduction of some specific sound

ISO 1996-1:2016(E)

3.4.8

impulsive sound

sound characterized by brief bursts of sound pressure

Note 1 to entry: The duration of a single impulsive sound is usually less than 1 s.

3.4.9

tonal sound

sound characterized by a single-frequency component or narrow-band components that emerge audibly from the total sound

3.5 Impulsive sound sources

NOTE At the time of publication of this part of ISO 1996, no mathematical descriptor exists which can define unequivocally the presence of impulsive sound or can separate impulsive sounds into the categories given in 3.5.1 to 3.5.3. These three categories, however, have been found to correlate best with community response. Thus, the sources of sound listed in 3.5.1 to 3.5.3 are used to define impulsive sound sources.

3.5.1

high-energy impulsive sound source

explosive source where the equivalent mass of TNT exceeds 50 g, or sources with comparable characteristics and degree of intrusiveness

Note 1 to entry: Sources of sonic booms include such items as aircraft, rockets, artillery projectiles, armour projectiles, and other similar sources. This category does not include the short duration sonic booms generated by small arms fire and other similar sources.

EXAMPLE Quarry and mining explosions, sonic booms, demolition, or industrial processes that use high explosives, explosive industrial circuit breakers, and military ordnance (e.g. armour, artillery, mortar fire, bombs, explosive ignition of rockets, and missiles).

3.5.2

highly impulsive sound source

source with highly impulsive characteristics and a high degree of intrusiveness

EXAMPLE Small arms fire, hammering on metal or wood, nail guns, drop-hammer, pile driver, drop forging, punch presses, pneumatic hammering, pavement breaking, or metal impacts in rail-yard shunting operations.

3.5.3

regular impulsive sound source

impulsive sound source that is neither highly impulsive nor high-energy impulsive sound source

Note 1 to entry: This category includes sounds that are sometimes described as impulsive, but are not normally judged to be as intrusive as highly impulsive sounds.

EXAMPLE Slamming of car door, outdoor ball games, such as football (soccer) or basketball, and church bells. Very fast pass-bys of low-flying military aircraft can also fall into this category.

3.6 Day, evening, night sound levels

3.6.1

day sound level

$L_{\text{day},h}$

equivalent continuous sound pressure level when the reference time interval is the day

Note 1 to entry: Subscript h indicates the number of hours, e.g. $L_{\text{day},12}$.

Note 2 to entry: A day is normally the 12 h between 7 h and 19 h or the 15 h between 7 h and 22 h. However, individual countries define day differently, e.g. 6 h to 18 h or 6 h to 22 h.

3.6.2 evening sound level

$L_{\text{evening},h}$

equivalent continuous sound pressure level when the reference time interval is the evening

Note 1 to entry: Subscript h indicates the number of hours, e.g. $L_{\text{evening},4}$.

Note 2 to entry: An evening is normally the 4 h between 19 h and 23 h. However, individual countries define evening differently, e.g. 18 h to 22 h.

3.6.3 night sound level

$L_{\text{night},h}$

equivalent continuous sound pressure level when the reference time interval is the night

Note 1 to entry: Subscript h indicates the number of hours, e.g. $L_{\text{night},8}$.

Note 2 to entry: A night is normally the 8 h between 23 h and 7 h or the 9 h between 22 h and 7 h. However, individual countries define night differently, e.g. 22 h to 6 h.

3.6.4 day-evening-night sound level

L_{den}

day-evening-night-weighted sound pressure level is defined by

$$L_{\text{den}} = 10 \lg \left[\frac{1}{24h} \left(t_{\text{day}} \cdot 10^{0,1 L_{\text{day},12}} + t_{\text{evening}} \cdot 10^{0,1(L_{\text{evening},4} + 5 \text{ dB})} + t_{\text{night}} \cdot 10^{0,1(L_{\text{night},8} + 10 \text{ dB})} \right) \right] \text{ dB}$$

where t_{day} , t_{evening} , and t_{night} are expressed in hours and $t_{\text{day}} + t_{\text{evening}} + t_{\text{night}} = 24 \text{ h}$.

Note 1 to entry: The default values for t_{day} , t_{evening} , and t_{night} are 12 h, 4 h, and 8 h, respectively, but individual countries, e.g. EU member states, reduce the evening period.

3.6.5 day-night sound level

L_{dn}

day-night-weighted sound pressure level is defined by

$$L_{\text{dn}} = 10 \lg \left[\frac{1}{24h} \left(t_{\text{day}} \cdot 10^{0,1 L_{\text{day},15}} + t_{\text{night}} \cdot 10^{0,1(L_{\text{night},9} + 10 \text{ dB})} \right) \right] \text{ dB}$$

where t_{day} and t_{night} are expressed in hours and $t_{\text{day}} + t_{\text{night}} = 24 \text{ h}$.

Note 1 to entry: The default values for t_{day} and t_{night} are 15 h and 9 h, respectively.

3.6.6 community tolerance level

L_{ct}

day-night sound level at which 50 % of the people in a particular community are predicted to be highly annoyed by noise exposure

Note 1 to entry: L_{ct} is used as a parameter that accounts for differences between sources and/or communities when predicting the percentage highly annoyed by noise exposure.

Note 2 to entry: [Annex H](#) provides further information on L_{ct} .

4 Symbols

Symbols are given in [Table 1](#) where the A-frequency weighting and F-time weighting are indicated for illustrative purposes only (except for L_{Cpeak} where C-weighting normally is used but some other