
**Turning and copying tool holders and
cartridges for indexable inserts —
Designation**

*Porte-plaquette de tournage et de copiage et cartouches pour
plaquettes amovibles — Désignation*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 5608:2012](#)

<https://standards.iteh.ai/catalog/standards/sist/65067f9c-2c6b-4b31-9ffe-69156bad8b07/iso-5608-2012>



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 5608:2012

<https://standards.iteh.ai/catalog/standards/sist/65067f9c-2c6b-4b31-9ffe-69156bad8b07/iso-5608-2012>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Explanation of the designation code	1
2.1 General	1
2.2 Letter and number symbols comprising the designation code	1
3 Compulsory symbols	2
3.1 Symbol for the holding method of the horizontally mounted insert — Reference position (1)	2
3.2 Symbol for insert shape — Reference position (2)	2
3.3 Symbol for tool style — Reference position (3)	3
3.4 Symbol for the insert normal clearance — Reference position (4)	5
3.5 Symbol for hand of tool — Reference position 5	5
3.6 Symbol for tool height — Reference position (6)	5
3.7 Symbol for tool width — Reference position (7)	6
3.8 Symbol for tool length — Reference position (8)	6
3.9 Symbol for indexable insert size — Reference position (9)	8
4 Optional symbol: symbol for special tolerances — Reference position (10)	8
Annex A (informative) Relationship between designations in this International Standard and the ISO 13399 series	10
Bibliography	11

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[ISO 5608:2012](https://standards.iteh.ai/catalog/standards/sist/65067f9c-2c6b-4b31-9ffe-69156bad8b07/iso-5608-2012)

<https://standards.iteh.ai/catalog/standards/sist/65067f9c-2c6b-4b31-9ffe-69156bad8b07/iso-5608-2012>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 5608 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 9, *Tools with cutting edges made of hard cutting materials*.

This fourth edition cancels and replaces the third edition (ISO 5608:1995), which has been technically revised.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 5608:2012](https://standards.iteh.ai/catalog/standards/sist/65067f9c-2c6b-4b31-9ffe-69156bad8b07/iso-5608-2012)

<https://standards.iteh.ai/catalog/standards/sist/65067f9c-2c6b-4b31-9ffe-69156bad8b07/iso-5608-2012>

Turning and copying tool holders and cartridges for indexable inserts — Designation

1 Scope

This International Standard establishes a code for the designation of turning and copying tool holders and cartridges with a rectangular shank, having a standardized dimension, f (see ISO 5610-1, ISO 5610-2, ISO 5610-3, ISO 5610-4, ISO 5610-5, ISO 5610-6, ISO 5610-7, ISO 5610-8, ISO 5610-9, ISO 5610-10, ISO 5610-11, ISO 5610-12, ISO 5610-13, ISO 5610-14 and ISO 5610-15 and ISO 5611), intended for use with indexable inserts, thus simplifying orders and specifications for such tools.

The designation of boring bars (tool holders with cylindrical shank) is given in ISO 5609-1.

2 Explanation of the designation code

2.1 General

The designation code comprises 10 symbols for the designation of dimensions and other characteristics of the tool and the insert, of which the first nine symbols shall be used in any designation. The last symbol may be used where necessary.

In addition to the standardized designation [symbols in positions (1) to (10)], a supplementary symbol consisting of a maximum of three letters and/or numbers may be added by the manufacturer for a better description of his/her products, on condition that this symbol is separated from the standardized designation by a dash and that it does not contain letters specified for position (10).

No addition to, or extension of, the code specified in this International Standard shall be made without consulting and securing the agreement of ISO/TC 29. Rather than adding symbols not provided for in this system, it is preferable to add to the designation conforming with this International Standard all necessary explanations in detailed illustrations or specifications.

2.2 Letter and number symbols comprising the designation code

2.2.1 Compulsory letter and/or number symbols

- a) (1): letter symbol identifying the method of holding the insert (see 3.1);
- b) (2): letter symbol identifying insert shape (see 3.2);
- c) (3): letter symbol identifying tool style (see 3.3);
- d) (4): letter symbol identifying insert normal clearance (see 3.4);
- e) (5): letter symbol identifying hand of tool (see 3.5);
- f) (6): number symbol identifying tool height (shank height of tool holders and height of cutting edge) (see 3.6);
- g) (7): number symbol identifying tool holder shank width or, for cartridges, the letter C followed by a letter symbol identifying the cartridge type (see 3.7);
- h) (8): letter symbol identifying tool length (see 3.8);
- i) (9): letter symbol identifying indexable insert size (see 3.9).

2.2.2 Optional letter symbol

(10): letter symbol indicating special tolerances (see Clause 4):

EXAMPLE

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
C	T	G	N	R	32	25	M	16	Q

NOTE The codes (2), (4) and (9) are in accordance with ISO 1832.

3 Compulsory symbols

3.1 Symbol for the holding method of the horizontally mounted insert — Reference position (1)

Table 1

Letter symbol	Insert holding method
C	Top clamping (insert without hole)
M	Top and hole clamping (insert with hole)
P	Hole clamping (insert with hole)
S	Screw clamping through hole (insert with hole)

iTech STANDARD PREVIEW
(standards.iteh.ai)

3.2 Symbol for insert shape — Reference position (2)











ISO 5608:2012
Table 2
<https://standards.iteh.ai/catalog/standards/sist/65067f9c-2c6b-4b31-9ffe-69156bad8b07/iso-5608-2012>

Letter symbol	Insert shape	Insert type
H	Hexagonal	Equilateral and equiangular
O	Octagonal	
P	Pentagonal	
S	Square	
T	Triangular	
C	Rhombic with 80° included angle	Equilateral and non-equiangular
D	Rhombic with 55° included angle	
E	Rhombic with 75° included angle	
M	Rhombic with 86° included angle	
V	Rhombic with 35° included angle	
W	Hexagonal with 80° included angle	
L	Rectangular	Non-equilateral and equiangular
A	Parallelogram-shaped with 85° included angle	Non-equilateral and non-equiangular
B	Parallelogram-shaped with 82° included angle	
K	Parallelogram-shaped with 55° included angle	
R	Round	Round

NOTE The included angle is always the smaller angle.

3.3 Symbol for tool style — Reference position (3)

Table 3 —

Letter symbol	Tool style	
A		90° cutting edge angle, straight shank, for side cutting
B		75° cutting edge angle, straight shank, for side cutting
C		90° cutting edge angle, straight shank, for end cutting
D ^a		45° cutting edge angle, straight shank, for side cutting
E		60° cutting edge angle, straight shank, for side cutting
F		90° cutting edge angle, offset shank, for end cutting
G		90° cutting edge angle, offset shank, for side cutting
H		107,5° cutting edge angle, offset shank, for side cutting
J		93° cutting edge angle, offset shank, for side cutting
K		75° cutting edge angle, offset shank, for end cutting












iTeh STANDARD PREVIEW

(standards.iteh.ai)

ISO 5608:2012

<https://standards.iteh.ai/catalog/standards/sist/650679e-2c6b-4b31-9ff6-69136bad8b07/iso-5608-2012>

Table 3 (continued)

Letter symbol	Tool style	
L		95° cutting edge angles on both cutting edges, offset shank, for side and end cutting
M		50° cutting edge angle, straight shank, for side cutting
N		63° cutting edge angle, straight shank, for side cutting
P		117,5° cutting edge angle, offset shank, for side cutting
R		75° cutting edge angle, offset shank, for side cutting
S ^a		45° cutting edge angle, offset shank, for side cutting
T		60° cutting edge angle, offset shank, for side cutting
U		93° cutting edge angle, offset shank, for end cutting
V		72,5° cutting edge angle, straight shank, for side cutting
W		60° cutting edge angle, offset shank, for end cutting
Y		85° cutting edge angle, offset shank, for end cutting

^a Tools of styles D and S may also be equipped with round inserts (shape R).

3.4 Symbol for the insert normal clearance — Reference position (4)

Table 4

Letter symbol	Insert normal clearance
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°

NOTE For non-equilateral inserts, the letter symbol applies to the normal clearance of the longer side.

3.5 Symbol for hand of tool — Reference position 5

Table 5

Letter symbol	Hand of tool
R	Right hand
L	Left hand
N	Either hand

3.6 Symbol for tool height — Reference position (6)

3.6.1 Tool holders with rectangular shank cross-section and height of cutting edge, h_1 , equal to shank height, h

For tool holders with rectangular shank cross-section and height of cutting edge, h_1 , equal to shank height, h , see Figure 1.

The number symbol for the tool height is the value of the shank height, h , in millimetres. If the resulting symbol has only one digit, it shall be preceded by a zero (0).

EXAMPLE 1 For $h = 32$ mm, the symbol is 32

EXAMPLE 2 For $h = 8$ mm, the symbol is 08

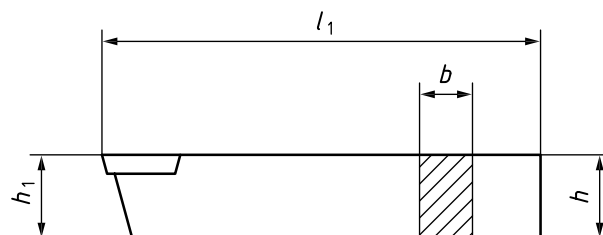


Figure 1