TECHNICAL SPECIFICATION

ISO/TS 13399-304

First edition

Cutting tool data representation and exchange —

Part 304:

Creation and exchange of 3D models — Solid milling cutters with arbor hole

Représentation et échange des données relatives aux outils coupants — Partie 304: Création et échange de modèles 3D — Fraises monobloc à trou central

alandone
alandone
alandone

alandone

alandone

interiore

alandone

interiore

interior

PROOF/ÉPREUVE



Reference number ISO/TS 13399-304:2015(E)

INTERNITACA SONA DA SO



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Contents			Page
Fore	word		v
Intr	oductio	n	vii
1	Scop	e	1
2	_	native references	
3	Starting elements, coordinate systems, planes		
	3.1	General	
	3.2	Reference system	2
	3.3	Coordinate system at the cutting part	3
	3.4	Planes	3
	3.5	Cutting reference point (CRP)	
4	Design of the model		
	4.1	Necessary properties for the connection interface feature	5
5	Plain milling cutter		
	5.1	General	6
	5.2 5.3	Necessary properties Geometry of the non-cutting part inclusive of the connection	7
	5.3 5.4	Geometry of the cutting part inclusive of the connection	
	5.5	Geometry of the non-cutting part inclusive of the connection Geometry of the cutting part Plain milling cutter, complete Mecessary properties.	9
6	Chall	mill tell de gara	0
O	6 1	General OF AS A LITTURE AS	9
	6.2	Necessary properties And Ath Ath Ath	10
	ns	L-PAMPITY AT THE HAM-BULLING NATI ENCINCIONAL THE CANDECTIAN	111
	6.4	Geometry of the cutting part	10
	6.5	Shell mill, complete	10
7	Thre	Geometry of the cutting part included the connection of the cutting part included the cutting part inc	11
	7.1	General	11
	7.2	Necessary properties	11
	7.3 7.4	Geometry of the non-cutting part inclusive of the connection	
	7.5	Thread milling cutter, complete	
8	Slotting cutter		
0	8.1	General	
	8.2	Necessary properties	
	8.3	Geometry of the non-cutting part inclusive of the connection	13
	8.4	Geometry of the cutting part	
	8.5	Slotting cutter, complete	14
9		ted profile slotting cutter	
	9.1	General	
	9.2 9.3	Necessary propertiesGeometry of the non-cutting part inclusive of the connection	
	9.3 9.4	Geometry of the cutting part inclusive of the conflection	
	9.5	Pointed profile slotting cutter	
10	Flatted profile slotting cutter		
	10.1	General	
	10.2	Necessary properties	
	10.3	Geometry of the non-cutting part inclusive of the connection	18
	10.4	Geometry of the cutting part	
	10.5	Flatted profile slotting cutter, complete	
11		ave profile cutter	
	111	General	18

ISO/TS 13399-304:2015(E)

	11.2 Necessary properties	19
	11.3 Geometry of the non-cutting part inclusive of the connection	
	11.4 Geometry of the cutting part	
	11.5 Concave profile cutter, complete	
12	Convex profile cutter	
	12.1 General	
	12.2 Necessary properties	21
	12.3 Geometry of the non-cutting part inclusive of the connection	21
	12.4 Geometry of the cutting part	
	12.5 Convex profile cutter, complete	
13	Corner-rounding cutter	
	13.1 General	
	13.2 Necessary properties	
	13.3 Geometry of the non-cutting part inclusive of the connection	23
	13.4 Geometry of the cutting part	
	13.5 Corner-rounding cutter, complete	
14	Angular milling cutter	24
	14.1 General	24
	14.2 Necessary properties	24
	14.3 Geometry of the non-cutting part inclusive of the connection	25
	14.4 Geometry of the cutting part	25
	14.5 Angular milling cutter, complete	25
15	14.1 General 14.2 Necessary properties 14.3 Geometry of the non-cutting part inclusive of the connection 14.4 Geometry of the cutting part 14.5 Angular milling cutter, complete Angular profile milling cutter 15.1 General 15.2 Necessary properties 15.3 Geometry of the non-cutting part inclusive of the connection	26
	15.1 General	26
	15.2 Necessary properties	26
	15.3 Geometry of the non-cutting part inclusive of the connection	27
	15.4 Geometry of the cutting part.	
	15.2 Necessary properties 15.3 Geometry of the non-cutting part inclusive of the connection 15.4 Geometry of the cutting part 15.5 Angular profile milling cutter, complete Sawing blade 16.1 General 16.2 Necessary properties 16.3 Geometry of the non-cutting part inclusive of the connection	
16	Sawing blade	27
	16.1 General	27
	16.2 Necessary properties	28
	16.3 Geometry of the non-cutting part inclusive of the connection	
	16.5 Sawing blade, complete	20 28
4 -	, , ,	
17	Design of details 17.1 Basics for modelling	29
		29
	_	
18	Attributes of surfaces — Visualization of the model features	
19	Structure of the design elements (tree of model)	
20	Data exchange model	
Annex A (informative) Information about nominal dimensions		
Bibliography		

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL Foreword Supplementary information

The committee responsible for this document is ISO/TC 29, Small tools.

ISO/TS 13399 consists of the following parts, under the general title *Cutting tool data representation* and exchange:

- Part 1: Overview, fundamental principles and general information model
- *Part 2: Reference dictionary for the cutting items* [Technical Specification]
- *Part 3: Reference dictionary for tool items* [Technical Specification]
- *Part 4: Reference dictionary for adaptive items* [Technical Specification]
- Part 5: Reference dictionary for assembly items [Technical Specification]
- Part 50: Reference dictionary for reference systems and common concepts [Technical Specification]
- Part 60: Reference dictionary for connection systems [Technical Specification]
- Part 80: Creation and exchange of 3D models Overview and principles [Technical Specification]
- *Part 100: Definitions, principles and methods for reference dictionaries* [Technical Specification]
- *Part 150: Usage guidelines* [Technical Specification]
- Part 201: Creation and exchange of 3D models Regular inserts [Technical Specification]
- *Part 202: Creation and exchange of 3D models Irregular inserts* [Technical Specification]
- Part 203: Creation and exchange of 3D models Replaceable inserts for drilling [Technical Specification]
- Part 204: Creation and exchange of 3D models Inserts for reaming [Technical Specification]
- Part 301: Concept for the design of 3D models based on properties according to ISO/TS 13399-3: Modelling of thread-cutting taps, thread-forming taps and thread-cutting dies [Technical Specification]

ISO/TS 13399-304:2015(E)

- Part 302: Concept for the design of 3D models based on properties according to ISO/TS 13399-3: Modelling of solid drills and countersinking tools [Technical Specification]
- Part 303: Creation and exchange of 3D models Solid end mills [Technical Specification]
- Part 304: Creation and exchange of 3D models Solid milling cutters with arbor hole [Technical Specification]
- Part 307: Creation and exchange of 3D models End mills for indexable inserts [Technical Specification]
- Part 312: Creation and exchange of 3D models Reamers for indexable inserts [Technical Specification]
- Part 401: Creation and exchange of 3D models Converting, extending and reducing adaptive items
 [Technical Specification]

The following parts are under preparation:

- Part 70: Graphical data layout Layer settings for tool designs [Technical Specification]
- Part 71: Graphical data layout Creation of documents for the standardized data exchange Graphical product information [Technical Specification]
- Part 72: Creation of documents for the standardized data exchange Definition of properties for drawing header and their XML-data exchange [Technical Specification]
- Part 308: Creation and exchange of 3D models Milling cutter with arbor hole for indexable inserts [Technical Specification]
- Part 309: Creation and exchange of 3D models Tool holders for indexable inserts [Technical Specification]
- Part 310: Creation and exchange of 3D models Turning tools with carbide tips [Technical Specification]
- Part 311: Creation and exchange of 3D models Solid reamers [Technical Specification]
- Part 405: Creation and exchange of 3D models—Collets [Technical Specification]

The designation system for customer solution cutting tools is to form the subject of a future Part 51.

vii

Introduction

This part of ISO/TS 13399 defines the concept, the terms and the definitions on how to design simplified 3D models of milling cutters with arbor hole and non-indexable cutting edges that can be used for NC-programming, simulation of the manufacturing processes and the determination of collision within machining processes. It is not intended to standardize the design of the cutting tool itself.

A cutting tool is used in a machine to remove material from a workpiece by a shearing action at the cutting edges of the tool. Cutting tool data that can be described by this International Standard include, but are not limited to, everything between the workpiece and the machine tool. Information about inserts, solid tools, assembled tools, adaptors, components and their relationships can be represented by this International Standard. The increasing demand providing the end user with 3D models for the purposes defined above is the basis for the development of this series of International Standards.

The objective of this International Standard is to provide the means to represent the information that describes cutting tools in a computer-sensible form that is independent from any particular computer system. The representation will facilitate the processing and exchange of cutting tool data within and between different software systems and computer platforms and support the application of this data in manufacturing planning, cutting operations and the supply of tools. The nature of this description makes it suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases and for archiving. The methods that are used for these representations are those developed by ISO/TC 184/SC 4 for the representation of product data by using standardized information models and reference dictionaries.

Definitions and identifications of dictionary entries are defined by means of standard data that consist of instances of the EXPRESS entity data types defined in the common dictionary schema, resulting from a joint effort between ISO/TC 184/SC 4 and IEC/TC 3/SC 3D and in its extensions defined in ISO 13584-24 and ISO 13584-25.

© ISO 2015 – All rights reserved **PROOF/ÉPREUVE**

I SI A DARD RELIGION OF SANDARD SANDAR

Cutting tool data representation and exchange —

Part 304:

Creation and exchange of 3D models — Solid milling cutters with arbor hole

1 Scope

This part of ISO/TS 13399 specifies a concept for the design of tool items, limited to any kind of milling cutters with arbor hole and non-indexable cutting edges, together with the usage of the related properties and domains of values.

This part of ISO/TS 13399 specifies a common way of design simplified models that contain the following:

- definitions and identifications of the design features of milling cutters with arbor hole and nonindexable cutting edges, with an association to the used properties;
- definitions and identifications of the internal structure of the 3D model that represents the features and the properties of milling cutters with arbor hole and non-indexable cutting edges.

The following are outside the scope of this part of ISO/TS 13399:

- applications where these standard data may be stored or referenced;
- concept of 3D models for cutting tools;
- concept of 3D models for cutting items;
- concept of 3D models for other tool items not being described in the scope of this part of ISO/TS 13399;
- concept of 3D models for adaptive items;
- concept of 3D models for assembly items and auxiliary items.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TS 13399-3, Cutting tool data representation and exchange — Part 3: Reference dictionary for tool items

ISO/TS 13399-4, Cutting tool data representation and exchange — Part 4: Reference dictionary for adaptive items

ISO/TS 13399-60, Cutting tool data representation and exchange — Part 60: Reference dictionary for connection systems

ISO/TS 13399-80, Cutting tool data representation and exchange — Part 80: Creation and exchange of 3D models — Overview and principles

Starting elements, coordinate systems, planes

3.1 General

The modelling of the 3D models shall be done by means of nominal dimensions.

WARNING — There is no guarantee that the 3D model, created according to the methods described in this part of ISO/TS 13399, is a true representation of the physical tool supplied by the tool manufacturer. If the models are used for simulation purposes, e.g. CAM simulation, it shall be taken into consideration that the real product dimension can differ from those nominal dimensions.

NOTE Some definitions are taken from ISO/TS 13399-50.

Reference system 3.2

The reference system (see Figure 1) consists of the following standard elements:

- standard coordinate system
 - right-handed rectangular Cartesian system in three-dimensional space called "primary coordinate system" (PCS);
- three orthogonal planes
 - planes in the coordinate system that contain the axis of the system named "xy-plane" (XYP), "xzplane" (XZP) and "yz-plane" (YZP);
- three orthogonal axis

three orthogonal axis

axes built as intersections of the three orthogonal planes lines respectively, named "x-axis" (XA), "y-axis" (YA) and "z-axis" (ZA).




Figure 1 — Reference system

For virtually mounting of milling cutters onto an adaptive item, an additional reference system shall be defined. This reference system is called "mounting coordinate system" (MCS). It is located at the starting point of the protruding length of a tool item. The orientation is shown in Figure 2.

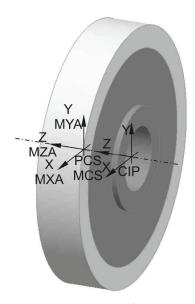


Figure 2 — Orientation of "PCS" and "MCS" reference system (example)

3.3 Coordinate system at the cutting part

The coordinate system at the cutting part shown in Figure 3, e.g. the front face, named "coordinate system in process" (CIP) with a defined distance to the PCS, shall be oriented as follows:

- Z-axis of CIP points to the PCS
- Z-axis of CIP is collinear to the z-axis of PCS;
- Y-axis of CIP is parallel to the y-axis of PCS

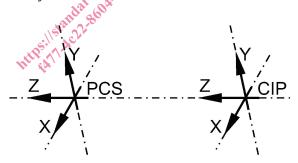


Figure 3 — Orientation of CIP

If the 3D modelling software gives the possibility to include interfaces for components to, for example, mount a face cutting part onto a complete cutting tool, it shall be advised to use the coordinate system "CIP".

If necessary, another designation can be given to the interface of the component (dependent on the software). The name is "CSIF" (for "coordinate system interface") and includes the coordinate system "CIP".

3.4 Planes

The modelling shall take place based on planes according to Figure 4, which shall be used as reference, if applicable. Therefore, it is ensured to be able to vary the model or to suppress single features of

ISO/TS 13399-304:2015(E)

independent design features by means of changing the value of one or more parameter of the model design. Furthermore, the identification of the different areas shall be simplified by using the plane concept, even if they contact each other with the same size, e.g. chip flute, shank and etc.

For the 3D visualization of milling cutter with arbor hole and non-indexable cutting edges, the planes shall be determined by the following and shown in Figure 4:

- "CWP" plane for the cutting width (CW), based on "CIP"; the distance of CWP to CIP shall be taken from the property "CW" or "CWN" if the cutting width is adjustable;
- "HEP" (head end plane) plane for the overall length (OAL), based on "PCS";
- "LCCBP" plane for the counter bore depth of a connection bore (LCCB), based on "CIP";
- "LCCP" plane for the distance of the cutting corner (distance cutting corner) of a profiled milling cutter, based on "CIP";
- "TEP" (tool end plane) plane that is the base of any other planes, located at origin of PCS.

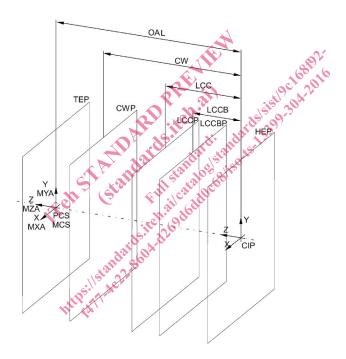


Figure 4 — Planes for design

3.5 Cutting reference point (CRP)

For the design, the cutting reference point shall be defined. The point is defined as the theoretical cutting edge in the XZ plane of the "PCS". Therefore, it is always referenced to the cutting diameter as shown in Figure 5.