



**5G;
5G System;
Binding Support Management Service;
Stage 3
(3GPP TS 29.521 version 15.6.0 Release 15)**

STANDARD PREVIEW
(standard: ai)
<https://standards.iso.org/standards/sist/15c7e550-5115-43bb-a93a-343012ac3e0e/3gpp-ts-129-521-v15.6.0-2020-08>



Reference

RTS/TSGC-0329521vf60

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	6
2 References	6
3 Definitions and abbreviations.....	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Binding Support Management Service.....	7
4.1 Service Description	7
4.1.1 Overview	7
4.1.2 Service Architecture	7
4.1.3 Network Functions.....	8
4.1.3.1 Binding Support Function (BSF)	8
4.1.3.2 NF Service Consumers.....	8
4.2 Service Operations	9
4.2.1 Introduction.....	9
4.2.2 Nbsf_Management_Register Service Operation.....	9
4.2.2.1 General	9
4.2.2.2 Register a new PCF Session binding information.....	9
4.2.3 Nbsf_Management_Deregister Service Operation	10
4.2.3.1 General	10
4.2.3.2 Deregister an individual PCF Session binding information.....	11
4.2.4 Nbsf_Management_Discovery Service Operation.....	11
4.2.4.1 General.....	11
4.2.4.2 Retrieve the PCF Session binding information for a given tuple.....	11
5 Nbsf_Management Service API.....	12
5.1 Introduction	12
5.2 Usage of HTTP.....	12
5.2.1 General.....	12
5.2.2 HTTP standard headers.....	13
5.2.2.1 General	13
5.2.2.2 Content type	13
5.2.3 HTTP custom headers.....	13
5.2.3.1 General	13
5.3 Resources	13
5.3.1 Resource Structure.....	13
5.3.2 Resource: PCF Session Bindings.....	14
5.3.2.1 Description	14
5.3.2.2 Resource definition	14
5.3.2.3 Resource Standard Methods.....	14
5.3.2.3.1 POST	14
5.3.2.3.2 GET	15
5.3.3 Resource: Individual PCF Session Binding.....	16
5.3.3.1 Description	16
5.3.3.2 Resource definition	16
5.3.3.3 Resource Standard Methods.....	16
5.3.3.3.1 DELETE.....	16
5.4 Custom Operations without associated resources.....	16
5.5 Notifications	16
5.6 Data Model.....	17
5.6.1 General.....	17

5.6.2 Structured data types.....17

5.6.2.1 Introduction.....17

5.6.2.2 Type PcfBinding18

5.6.3 Simple data types and enumerations.....18

5.6.3.1 Introduction.....18

5.6.3.2 Simple data types18

5.7 Error handling19

5.7.1 General.....19

5.7.2 Protocol Errors.....19

5.7.3 Application Errors19

5.8 Feature negotiation.....19

5.9 Security19

Annex A (normative): OpenAPI specification.....20

A.1 General20

A.2 Nbsf_Management API.....20

Annex C (informative): Change history25

History28

iTeh STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/15c7e550-5115-43bb-a93a-343fa9f2ac7e/etsi-ts-129-521-v15.6.0-2020-08>

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/15c7e750-5115-43bb-a93a-343fa9f2ac7e/etsi-ts-129-521-v15.6.0>
2020-08

1 Scope

The present specification provides the stage 3 definition of the Binding Support Management Service of the 5G System.

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The stage 2 definition and related procedures for Binding Support Management Service is specified in 3GPP TS 23.502 [3] and 3GPP TS 23.503 [4].

The 5G System stage 3 call flows are provided in 3GPP TS 29.513 [5].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [6] and 3GPP TS 29.501 [7].

The Binding Support Management Service is provided by the Binding Support Function (BSF).

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 23.503: "Policy and Charging Control Framework for the 5G System; Stage 2".
- [5] 3GPP TS 29.513: "5G System; Policy and Charging Control signalling flows and QoS parameter mapping; Stage 3".
- [6] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [7] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [8] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".
- [9] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [10] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces Stage 3".
- [11] OpenAPI: "OpenAPI 3.0.0 Specification", <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.0.md>.
- [12] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [13] IETF RFC 7807: "Problem Details for HTTP APIs".
- [14] 3GPP TS 29.213: "Policy and Charging Control signalling flows and Quality of Service (QoS) parameter mapping".
- [15] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [16] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [17] 3GPP TS 23.527: "5G System; Restoration Procedures".

[18] 3GPP TR 21.900: "Technical Specification Group working methods".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

AF	Application Function
BSF	Binding Support Function
DNN	Data Network Name
DRA	Diameter Routing Agent
HTTP	Hypertext Transfer Protocol
FQDN	Fully Qualified Domain Name
GPSI	Generic Public Subscription Identifier
JSON	JavaScript Object Notation HTTP Hypertext Transfer Protocol
MAC	Media Access Control
NEF	Network Exposure Function
NRF	Network Repository Function
PCF	Policy Control Function
SMF	Session Management Function
S-NSSAI	Single Network Slice Selection Assistance Information
SUPI	Subscription Permanent Identifier
UDR	Unified Data Repository

4 Binding Support Management Service

4.1 Service Description

4.1.1 Overview

The Binding Support Management Service as defined in 3GPP TS 23.502 [3] and 3GPP TS 23.503 [4], is provided by the Binding Support Function (BSF).

The Nbsf_Management service is used for the BSF to provide a PDU session binding functionality, which ensures that an AF request for a certain PDU Session reaches the relevant PCF holding the PDU Session information.

This service:

- allows NF service consumers to register, update and remove the binding information; and
- allows NF service consumers to retrieve the binding information.

4.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The Policy and Charging related 5G architecture is also described in 3GPP TS 23.503 [4] and 3GPP TS 29.513 [5].

The Binding Support Management Service (Nbsf_Management) is exhibited by the Binding Support Function (BSF).

Known consumers of the Nbsf_management service are:

- Policy Control Function (PCF)
- Network Exposure Function (NEF)
- Application Function (AF)

As described in 3GPP TS 23.503 [4], the BSF is a function that can be deployed standalone or can be the functionality provided by other network functions, such as PCF, UDR, NRF, SMF.

NOTE: The PCF accesses the Nbsf_management service at the BSF via an internal interface when it is collocated with BSF.

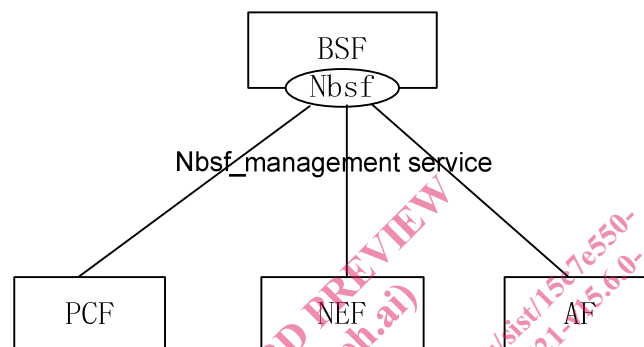


Figure 4.1.2-1: Reference Architecture for the Nbsf management service; SBI representation

4.1.3 Network Functions

4.1.3.1 Binding Support Function (BSF)

The BSF:

- stores the binding information for a certain PDU Session; and
- discovers the binding information (e.g. the address information of the selected PCF).

The BSF allows NF service consumers (e.g.PCF) to register, update and remove the binding information, and allows NF service consumers (e.g. AF, NEF) to discover the binding information (e.g the address information of the selected PCF).

The BSF can be deployed standalone or can be collocated with other network functions, such as PCF, UDR, NRF and SMF.

4.1.3.2 NF Service Consumers

The Policy Control Function (PCF):

- registers the binding information in the BSF for a UE when an IPv4 address and/or IPv6 prefix is allocated, or a MAC address is used for the PDU session; and,
- removes the binding information in the BSF when an IPv4 address and/or IPv6 prefix is released, or a MAC address is not used for the PDU Session.

The Network Exposure Function (NEF):

- provides a means for the Application Functions to securely interact with the Policy framework for policy control to 3GPP network. During the procedure, it needs to discover the selected PCF by using the Nbsf_Management_Discovery service operation.

The Application Function (AF):

- discover the selected PCF by using the Nbsf_Management_Discovery service operation when it is allowed to interact directly with the policy framework for policy control.

4.2 Service Operations

4.2.1 Introduction

Table 4.2.1-1: Operations of the Nbsf_Management Service

Service operation name	Description	Initiated by
Nbsf_Management_Register	This service operation is used to register the binding information for a UE when an IPv4 address and/or an IPv6 prefix is allocated for an IP PDU Session or a MAC address is used for an Ethernet PDU session.	NF service consumer (PCF)
Nbsf_Management_Deregister	This service operation is used to deregister the binding information for a UE.	NF service consumer (PCF)
Nbsf_Management_Discovery	This service operation is used by an NEF or AF to discover a selected PCF .	NF service consumer (NEF, AF)

4.2.2 Nbsf_Management_Register Service Operation

4.2.2.1 General

This service operation allows the NF service consumer (e.g. PCF) to register the session binding information for a UE in the BSF by providing the user identity, the DNN, the UE address(es) and the selected PCF address for a certain PDU Session to the BSF, and BSF stores the information.

If the NF service consumer (e.g. PCF) receives a new UE address (e.g. IPv6 prefix) and already registered session binding information for this PDU session, the NF service consumer (e.g. PCF) shall register a new session binding information in the BSF.

NOTE: For a PDU session, the PCF can receive a new UE address by Npcf_SMPolicyControl_Update service operation.

4.2.2.2 Register a new PCF Session binding information

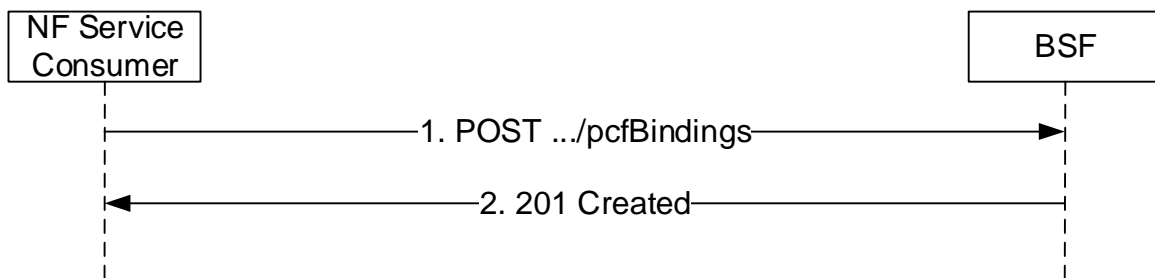


Figure 4.2.2.2-1: NF service consumer register a new PCF Session binding information

The NF service consumer shall invoke the Nbsf_Management_Register service operation to register the session binding information for a UE in the BSF. The NF service consumer shall send an HTTP POST request with "{apiRoot}/nbsf-management/v1/pcfBindings" as Resource URI representing the "PCF Session Bindings", as shown in figure 4.2.2.2-1, step 1, to create a binding information for an "Individual PCF Session Binding" according to the information (e.g. UE address(es), SUPI, GPSI, DNN, S-NSSAI) in message body. The PcfBinding data structure provided in the request body shall include:

- address information of the served UE consisting of: