



SLOVENSKI STANDARD SIST ISO 492:2015

01-april-2015

Nadomešča:
SIST ISO 492:2002

Kotalni ležaji - Radialni ležaji - Specifikacija geometrijskih veličin izdelka (GPS) in vrednosti tolerance

Rolling bearings - Radial bearings - Geometrical product specifications (GPS) and tolerance values

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Roulements - Roulements radiaux - Spécification géométrique des produits (GPS) et valeurs de tolérance

[SIST ISO 492:2015
https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ae0f-f23aa00b38f2/sist-iso-492-2015](https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ae0f-f23aa00b38f2/sist-iso-492-2015)

Ta slovenski standard je istoveten z: ISO 492:2014

ICS:

21.100.20	Kotalni ležaji	Rolling bearings
-----------	----------------	------------------

SIST ISO 492:2015

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 492:2015

<https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ae0f-f23aa00b38f2/sist-iso-492-2015>

INTERNATIONAL STANDARD

**ISO
492**

Fifth edition
2014-07-15

Corrected version
2014-09-15

Rolling bearings — Radial bearings — Geometrical product specifications (GPS) and tolerance values

*Roulements — Roulements radiaux — Spécification géométrique des
produits (GPS) et valeurs de tolérance*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 492:2015](https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ae0f-f23aa00b38f2/sist-iso-492-2015)

<https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ae0f-f23aa00b38f2/sist-iso-492-2015>



Reference number
ISO 492:2014(E)

© ISO 2014

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 492:2015

<https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ae0f-f23aa00b38f2/sist-iso-492-2015>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	1
5 Limit deviations and tolerance values	17
5.1 General.....	17
5.2 Radial bearings except tapered roller bearings.....	18
5.3 Radial tapered roller bearings.....	28
5.4 Radial bearings, outer ring flanges.....	41
5.5 Basically tapered bores, tapers 1:12 and 1:30.....	42
Annex A (informative) Symbols and terms as given in ISO 492:2002 in relation to descriptions given in this International Standard	44
Annex B (informative) Example of drawing indications of characteristics with specification for radial bearings	48
Annex C (informative) Illustration of ISO 1132-1 and ISO 14405-1 terms and definitions	50
Annex D (informative) Description with illustrations for specification modifiers of linear sizes	57
Bibliography	66

SIST ISO 492:2015

<https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ae0f-f23aa00b38f2/sist-iso-492-2015>

ISO 492:2014(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 4, *Rolling bearings*, Subcommittee SC 4, *Tolerances, tolerance definitions and symbols (including GPS)*.

This fifth edition cancels and replaces the fourth edition (ISO 492:2002), which has been technically revised.

This corrected version of ISO 492:2014 incorporates the correction of the title.

Introduction

This International Standard is a machine element geometry standard as defined in the geometrical product specification (GPS) system as presented in master plan of ISO/TR 14638.[12]

The fundamental rules of ISO/GPS given in ISO 8015[8] apply to this International Standard and the default decision rules given in ISO 14253-1[10] apply to the specifications made in accordance with this International Standard, unless otherwise indicated.

The connection between functional requirements, measuring technique and measuring uncertainty is always intended to be considered. The traditionally used measuring technique is described in ISO 1132-2.[5] For measurement uncertainty it is intended that ISO 14253-2[11] should be considered.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 492:2015

<https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ac0f-f23aa00b38f2/sist-iso-492-2015>

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

SIST ISO 492:2015

<https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ac0f-f23aa00b38f2/sist-iso-492-2015>

Rolling bearings — Radial bearings — Geometrical product specifications (GPS) and tolerance values

1 Scope

This International Standard specifies dimensional and geometrical characteristics, limit deviations from nominal sizes, and tolerance values to define the interface (except chamfers) of radial rolling bearings. Nominal boundary dimensions are defined in ISO 15, ISO 355[2] and ISO 8443[9].

This International Standard does not apply to certain radial bearings of particular types (e.g. needle roller bearings) or for particular fields of application (e.g. airframe bearings and instrument precision bearings). Tolerances for such bearings are given in the relevant International Standards.

Chamfer dimension limits are given in ISO 582.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 15, *Rolling bearings — Radial bearings — Boundary dimensions, general plan*

ISO 582, *Rolling bearings — Chamfer dimensions — Maximum values*

ISO 1101, *Geometrical product specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 5593, *Rolling bearings — Vocabulary*

ISO 14405-1, *Geometrical product specifications (GPS) — Dimensional tolerancing — Part 1: Linear sizes*

ISO/TS 17863, *Geometrical product specification (GPS) — Geometrical tolerancing of moveable assemblies*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1101, ISO 5593, ISO 14405-1, and ISO/TS 17863 apply.

4 Symbols

To express that the ISO/GPS system, ISO 8015[8], is applied, the dimensional and geometrical characteristics shall be included in the technical product documentation (for example, on the drawing). The dimensional and geometrical specifications, associated to these characteristics are described in [Table 1](#) and [Figures 1](#) to [17](#).

Descriptions for symbols are in accordance with GPS terminology; relationships with traditional terms are described in [Annex A](#).






A tolerance value associated to a characteristic is symbolised by t followed by the symbol for the characteristic, for example t_{VBs} .

In this International Standard, the ISO default specification operator for size is in accordance with ISO 14405-1, i.e. the two-point size is valid. Some specification modifiers are described in [Annex D](#).

ISO 492:2014(E)

The detailed definitions for terms in ISO 1101 and ISO 14405-1 and traditional terms in ISO 1132-1[4] are not fully equal. For differences, see [Annex C](#).

Table 1 — Symbols for nominal sizes, characteristics, and specification modifiers

Symbol for nominal dimension (size and distance) ^a	Symbol for characteristic ^a	GPS symbol and specification modifier ^{bc}	Description ^d	See Figure
<i>B</i>			Nominal inner ring width	1; 2; 12
	VBs		Symmetrical rings: range of two-point sizes of inner ring width	1; 12
		 ^e	Asymmetrical rings: range of minimum circumscribed sizes of inner ring width, between two opposite lines, obtained from any longitudinal section which includes the inner ring bore axis	2; 7
	ΔBs		Symmetrical rings: deviation of a two-point size of inner ring width from its nominal size	1; 12
		 ^e 	Asymmetrical rings, upper limit: deviation of a minimum circumscribed size of inner ring width, between two opposite lines, in any longitudinal section which includes the inner ring bore axis, from its nominal size Asymmetrical rings, lower limit: deviation of a two-point size of inner ring width from its nominal size	2; 7

<https://standards.iteh.ai/catalog/standards/sist/b14ad33f-4669-4932-ac0f-f23aa00b38f2/sist-iso-492-2015>

Table 1 — (continued)

Symbol for nominal dimension (size and distance) ^a	Sym- bol for charac- teristic ^a	GPS symbol and specifica- tion modifier ^{bc}	Description ^d	See Figure
C			Nominal outer ring width	1; 7; 12
	VCs		Symmetrical rings: range of two-point sizes of outer ring width	1; 7
			Asymmetrical rings: range of minimum circumscribed sizes of outer ring width between two opposite lines, obtained from any longitudinal section which includes the outer ring outside surface axis	2; 12
	ΔCs		Symmetrical rings: deviation of a two-point size of outer ring width from its nominal size	1; 7
			Asymmetrical rings, upper limit: deviation of a minimum circumscribed size of outer ring width, between two opposite lines, in any longitudinal section which includes the outer ring outside surface axis, from its nominal size	2; 12
			Asymmetrical rings, lower limit: deviation of a two-point size of outer ring width from its nominal size	
C ₁			Nominal outer ring flange width	12
	VC1s		Range of two-point sizes of outer ring flange width	12
	ΔC1s		Deviation of a two-point size of outer ring flange width from its nominal size	12
d			Nominal bore diameter of a cylindrical bore or at the theoretical small end of a tapered bore	1 to 7; 12 to 16
	Vdmp		Range of mid-range sizes (out of two-point sizes) of bore diameter obtained from any cross-section of a cylindrical bore	1; 2; 12
	Δdmp		Cylindrical bore: deviation of a mid-range size (out of two-point sizes) of bore diameter in any cross-section from its nominal size	1; 2; 12
			Tapered bore: deviation of a mid-range size (out of two-point sizes) of bore diameter at the theoretical small end from its nominal size	7
	Vdsp		Range of two-point sizes of bore diameter in any cross-section of a cylindrical or tapered bore	1; 2; 7; 12
	Δds		Deviation of a two-point size of bore diameter of a cylindrical bore from its nominal size	1; 2; 12

Table 1 — (continued)

Symbol for nominal dimension (size and distance) ^a	Symbol for characteristic ^a	GPS symbol and specification modifier ^{bc}	Description ^d	See Figure
d_1			Nominal diameter at the theoretical large end of a tapered bore	7
	Δd_{1mp}	$\textcircled{\text{LP}} \textcircled{\text{SD}} \text{SCS}^f$	Deviation of a mid-range size (out of two-point sizes) of bore diameter at the theoretical large end of a tapered bore from its nominal size	7
D			Nominal outside diameter	1 to 16
	VD_{mp}	$\textcircled{\text{LP}} \textcircled{\text{SD}} \text{ACS} \textcircled{\text{SR}}$	Range of mid-range sizes (out of two-point sizes) of outside diameter obtained from any cross-section	1; 2; 7; 12
	ΔD_{mp}	$\textcircled{\text{LP}} \textcircled{\text{SD}} \text{ACS}$	Deviation of a mid-range size (out of two-point sizes) of outside diameter in any cross-section from its nominal size	1; 2; 7; 12
	VD_{sp}	$\textcircled{\text{LP}} \textcircled{\text{SR}} \text{ACS}$	Range of two-point sizes of outside diameter in any cross-section	1; 2; 7; 12
	ΔD_s	$\textcircled{\text{LP}}$	Deviation of a two-point size of outside diameter from its nominal size	1; 2; 7; 12
D_1			Nominal outside diameter of outer ring flange	12
	ΔD_{1s}	$\textcircled{\text{LP}}$	Deviation of a two-point size of outside diameter of outer ring flange from its nominal size	12
	Kea	\nearrow g	Circular radial run-out of outer ring outside surface of assembled bearing with respect to datum, i.e. axis, established from the inner ring bore surface	4; 5; 6; 9; 10; 11; 14; 15; 16
	Kia	\nearrow g	Circular radial run-out of inner ring bore surface of assembled bearing with respect to datum, i.e. axis, established from the outer ring outside surface	4; 5; 6; 9; 10; 11; 14; 15; 16
	Sd	\nearrow g	Circular axial run-out of inner ring face with respect to datum, i.e. axis, established from the inner ring bore surface	3; 8; 13
	SD	\perp	Perpendicularity of outer ring outside surface axis with respect to datum established from the outer ring face	3; 8
	$SD1$	\perp	Perpendicularity of outer ring outside surface axis with respect to datum established from the outer ring flange back face	13

Table 1 — (continued)










Symbol for nominal dimension (size and distance) ^a	Sym- bol for charac- teristic ^a	GPS symbol and specification modifier ^{bc}	Description ^d	See Fig- ure
	Sea	 g	Circular axial run-out of outer ring face of assembled bearing with respect to datum, i.e. axis, established from the inner ring bore surface	5; 6; 10; 11
	Sea1	 g	Circular axial run-out of outer ring flange back face of assembled bearing with respect to datum, i.e. axis, established from the inner ring bore surface	15; 16
	Sia	 g	Circular axial run-out of inner ring face of assembled bearing with respect to datum, i.e. axis, established from the outer ring outside surface	5; 6; 10; 11; 15; 16
SL^h			Taper slope is the difference between nominal diameters at the theoretical large end and small end of a tapered bore ($d_1 - d$)	7
	ΔSL	 g	Deviation of taper slope of a tapered inner ring bore from its nominal size ⁱ	7
T			Nominal assembled bearing width	17
	ΔTs	 g	Deviation of minimum circumscribed size of assembled bearing width from its nominal size	17
T_1			Nominal effective width of inner subunit assembled with a master outer ring	17
	$\Delta T1s$	 g	Deviation of minimum circumscribed size of effective width (inner subunit assembled with a master outer ring) from its nominal size	17
T_2			Nominal effective width of outer ring assembled with a master inner subunit	17
	$\Delta T2s$	 g	Deviation of minimum circumscribed size of effective width (outer ring assembled with a master inner subunit) from its nominal size	17

Table 1 — (continued)


Symbol for nominal dimension (size and distance) ^a	Sym- bol for charac- teristic ^a	GPS symbol and specifica- tion modifier ^{bc}	Description ^d	See Fig- ure
T_F			Nominal assembled flanged bearing width	17
	ΔTF_s	 ^g	Deviation of minimum circumscribed size of assembled flanged bearing width from its nominal size	17
T_{F2}			Nominal effective width of flanged outer ring assembled with a master inner subunit	17
	$\Delta TF2_s$	 ^g	Deviation of minimum circumscribed size of effective width (flanged outer ring assembled with a master inner subunit) from its nominal size	17
α			Frustum angle of tapered inner ring bore ^h	7; 8; 9; 10; 11
a^k			Distance from face to define the restricted area for SD or SD1	3; 8; 13

^a Symbols as defined in ISO 15241[15] except for the format used.

^b Symbols as defined in ISO 1101 and ISO 14405-1.

^c Specification modifier  shall not be indicated on a drawing, if the two-point size is applied for both specified limits.

^d Description based on ISO 1101, ISO 5459[2] and ISO 14405-1.

^e Specification modifier  is not appropriate in cases where no opposite material is existing, e.g. tapered roller bearing outer ring with large back face chamfer and small front face. Solutions need to be developed within the framework of the GPS system and considered in future revisions of this International Standard.

^f Specification modifier **SCS** can be omitted on the drawing.

^g Symbols for direction of gravity , fixed parts **FP** and movable parts **MP**, according to ISO/TS 17863; see [Figures 4, 5, 6, 9, 10, 11, 14, 15, 16, and 17](#).

^h *SL* is a distance.

ⁱ Description based on ISO 1119.[3]

^k For $r_{s,min} \leq 0,6$: $a = r_{s,max,axial} + 0,5$; for $r_{s,min} > 0,6$: $a = 1,2 \times r_{s,max,axial}$; $r_{s,max,axial}$ see ISO 582. For definitions of $r_{s,min}$ and $r_{s,max,axial}$ see ISO 582.

The indications in [Figures 1 to 17](#) illustrate the correlation of interface dimensions and corresponding dimensional and geometrical tolerance symbols.

The specifications for single components are illustrated in [Figures 1, 2, 3, 7, 8, 12, and 13](#). The specifications for assembled components are illustrated in [Figures 4, 5, 6, 9, 10, 11, 14, 15, 16, and 17](#).

NOTE [Figures 1 to 17](#) are drawn schematically and do not necessarily show all design details.

Two examples of a real drawing indication are given in [Annex B](#).


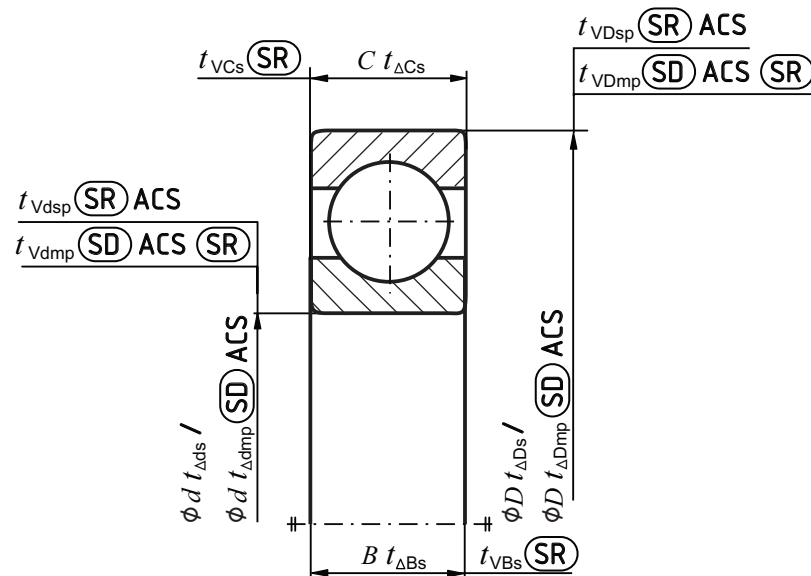


Figure 1 — Size specification for single components for bearing with cylindrical bore and symmetrical rings

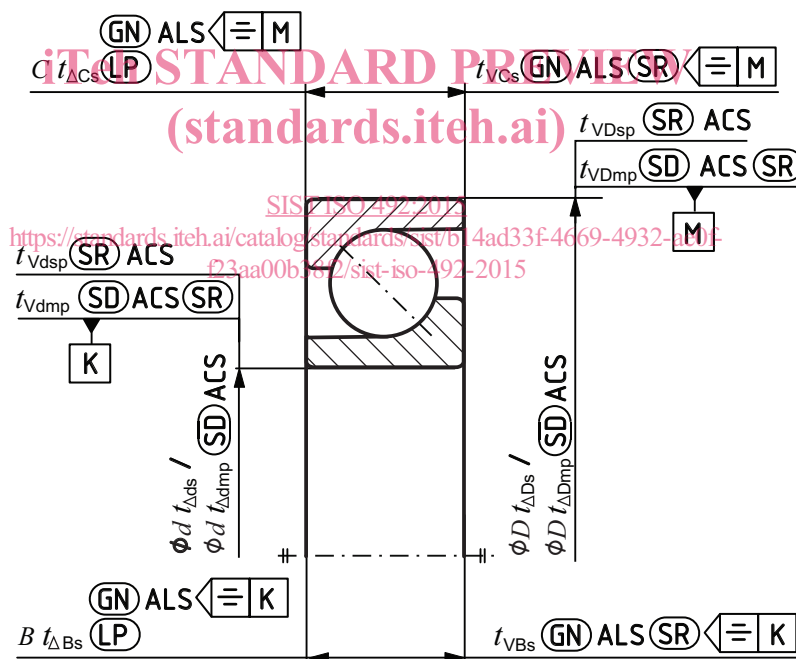

NOTE t_{VBs} and t_{VCs} are not relevant for tapered roller bearings.

Figure 2 — Size specification for single components for bearing with cylindrical bore and asymmetrical rings