# INTERNATIONAL STANDARD

ISO 12164-4

Second edition 2014-12-15

## Hollow taper interface with flange contact surface —

Part 4:

Dimensions of receivers for stationary tools

iTeh STInterfaces à cône creux-face VIEW

Partie 4: Dimensions des nez de broches pour outils non rotatifs

ISO 12164-4:2014

https://standards.iteh.ai/catalog/standards/sist/61124990-60b4-4450-ad79-4e73d90ecb13/iso-12164-4-2014



## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 12164-4:2014 https://standards.iteh.ai/catalog/standards/sist/61124990-60b4-4450-ad79-4e73d90ecb13/iso-12164-4-2014



#### COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Published in Switzerland

Cont	<b>tents</b> Page
Forew	ordiv
1	Scope1
2	Normative references1
3	Dimensions 1   3.1 General 1   3.2 Receiver for hollow taper shank, type T 1
4	Design — Hole for manual clamping3
5	Designation 3
Annex	x A (informative) Recommendations for use and application
Biblio	graphy6

# iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 12164-4:2014 https://standards.iteh.ai/catalog/standards/sist/61124990-60b4-4450-ad79-4e73d90ecb13/iso-12164-4-2014

#### **Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 29, Small tools.

This second edition cancels and replaces the first edition (ISO 12164-4:2008), Figure 1 of which has been technically revised. https://standards.iteh.ai/catalog/standards/sist/61124990-60b4-4450-ad79-4e73d90ecb13/iso-12164-4-2014

ISO 12164 consists of the following parts, under the general title *Hollow taper interface with flange contact surface*:

- Part 1: Shanks Dimensions
- Part 2: Receivers Dimensions
- Part 3: Dimensions of shanks for stationary tools
- Part 4: Dimensions of receivers for stationary tools

### Hollow taper interface with flange contact surface —

#### Part 4:

### Dimensions of receivers for stationary tools

#### 1 Scope

This part of ISO 12164 specifies dimensions for receivers with taper and flange contact surfaces for hollow taper shanks in accordance with ISO 12164-3 to be applied to machine tools (e.g. turning machines, turning-mill machines). A range of sizes is specified.

This part of ISO 12164 specifies the receiver of type T. It is for automatic tool exchange and manual clamping, which is achieved via holes in both the receiver and the tool shank.

The torque is transmitted via the tail end of the shank through keys as well as friction.

#### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1101, Geometrical product specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out  $\underline{\text{ISO 12164-4:2014}}$ 

https://standards.iteh.ai/catalog/standards/sist/61124990-60b4-4450-

ISO 2768-1, General tolerances — Part 13 Tolerances for linear and angular dimensions without individual tolerance indications

ISO 3040, Geometrical product specifications (GPS) — Dimensioning and tolerancing — Cones


#### 3 Dimensions

#### 3.1 General

Dimensions of receivers for hollow taper shanks with flange contact surface for stationary tools, type T, are specified in Figure 1, Table 1, and Annex A. Details not specified in Figures 1 shall be chosen expediently. Tolerancing of form, orientation, location, and run-out is in accordance with ISO 1101. Dimensioning and tolerancing of cones are in accordance with ISO 3040. Tolerances not specified shall be of tolerance class «m» in accordance with ISO 2768-1.

#### 3.2 Receiver for hollow taper shank, type T

The dimensions of receiver for hollow taper shanks, type T, shall be in conformance with <u>Figure 1</u> and <u>Table 1</u>.

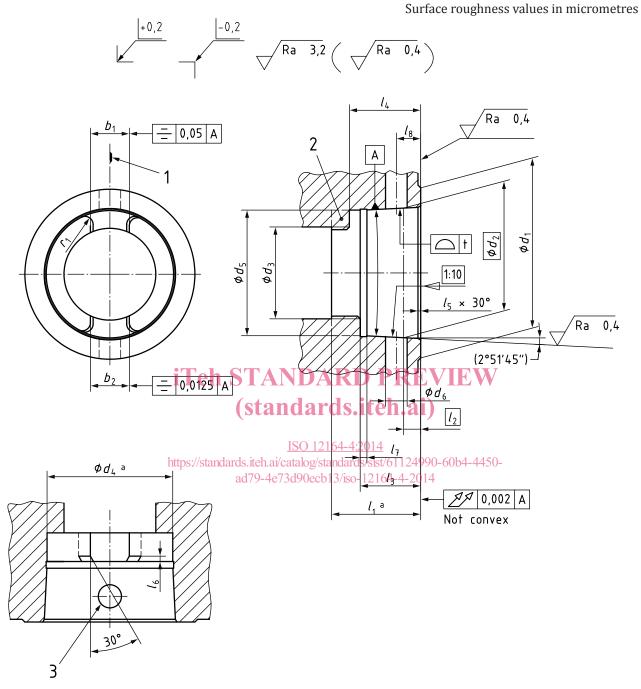

#### Key

- 1 cutting edgeb
- 2 tenon<sup>c</sup>
- 3 hole for manual clampingd
- a When tenons are inserted, the taper hole may be conical over the total length  $l_1$ .
- b Position of the cutting edge for right-hand tools with single cutting edged.
- c Tenon alternative integrated or inserted.
- d Inside edge min. 0,5 mm × 45° chamfer.

Figure 1 — Dimensions of receivers

Dimensions in millimetres

**Table 1 — Dimensions** 

Dimensions in millimetres

Nomii	nal size	32	40	50	63	80	100	125	160			
$b_1$	±0,05	6,8	7,8	10,3	12,3	15,8	19,78	24,78	29,78			
		6,92	7,92	10,41	12,41	15,91	19,89	24,89	29,89			
<i>b</i> <sub>2</sub>	tol.		0 -0,0	)25		0 -0,03						
$d_1$	min.	32	40	50	63	80	100	125	160			
$d_2$		23,998	29,998	37,998	47,998	59,997	74,997	94,996	119,995			
$d_3$ a		17	21	26	34	42	53	67	85			
$d_4$ <sup>b</sup>	+ 0,1	23,28	29,06	36,85	46,53	58,1	72,6	92,05	116,1			
$d_5$	+ 0,2	23,8	29,6	37,5	47,2	58,8	73,4	93	118			
$d_6$			Hole diameter to be chosen by the manufacturer									
$l_1$ b	+ 0,2	16,5	20,5	25,5	33	41	51	64	81			
$l_2$	-	3,2	4	5	6,3	8	10	12,5	16			
l <sub>3</sub>	+ 0,2	11,4	h STA 14,4 (sta	NDAF 17,9 ndard	22,4 21,4	28,4	35,4	44,4	57,4			
<i>l</i> 4	+ 0,2 0	13,4	16,9	20,9 <u>ISO 12164</u>	26,4 -4:2014	32,4	40,4	51,4	64,4			
<i>l</i> <sub>5</sub>		dits://st	andan <mark>ol,8ite</mark> h.a				450- 1,5	2	2			
$l_6$	+ 0,1 0	1	ad79-46 1	1,5	iso-12164-4-2 1,5	2014	2	2,5	2,5			
17	±0,1	2	2	2	2,5	3	3	4	4			
l <sub>8</sub>	±0,1	5	6	7,5	9	12	15	_	_			
r <sub>1</sub> c	0 -0,05	1,5	2	2,5	3	4	5	6	8			
t		0,001 5	0,001 5	0,002	0,002	0,002 5	0,003	0,003 5	0,003 5			

a Depending on the clamping system.

#### 4 Design — Hole for manual clamping

Design without hole for manual clamping is standard.

Design with hole for manual clamping is optional.

#### 5 Designation

A receiver for hollow taper shank (HSK) in accordance with this part of ISO 12164 shall be designated by the following:

a) "Receiver for hollow taper shank";

b See note a to Figure 1.

c  $r_1$  tangent to  $b_1$  or  $b_2$  and  $d_4$ .

#### ISO 12164-4:2014(E)

- b) reference to this part of ISO 12164, i.e. ISO 12164-4;
- c) "HSK";
- d) type: T for stationary tools;
- e) nominal size, in millimetres.

EXAMPLE A receiver for hollow taper shank with flange contact surface (HSK) for stationary tools (type T) with nominal size 50 mm is designated as follows:

Receiver for hollow taper shank ISO 12164-4-HSK-T 50

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 12164-4:2014 https://standards.iteh.ai/catalog/standards/sist/61124990-60b4-4450-ad79-4e73d90ecb13/iso-12164-4-2014

### Annex A

(informative)

### Recommendations for use and application

#### A.1 Clamping system

The clamping system should be specified by the manufacturer of the receiver or machine tool spindle. The system should provide sufficient clamping force to ensure contact of the shank flange with the receiver face, as well as seating of the taper by elastic deformation. The torque transmitting capacity of the interface is substantially determined by the size of the clamping force.

#### A.2 Clamping forces

The recommended clamping forces are shown in Table A.1.

The clamping forces are only applied to the hollow shanks for stationary tools (type T).

iTeh STANDARD PREVIEW									
Nominal size, mm	32	40 40	50	63	80	100	125	160	
Clamping force, kN	5	8 Stall	14 US.	24	<b>3</b> 7	55	86	150	

Lower clamping forces can be sufficient when operational loads are low (e.g. cutting and feed forces in finish machining). Conversely, higher clamping forces can be required when high operational loads are encountered (e.g. cutting and feed forces in heavy machining).

#### A.3 Information about speeds and torque

The manufacturer should provide information regarding permissible speeds and torque transmitting capacities.