
**Tool shanks with 7/24 taper for
automatic tool changers —**

**Part 3:
Retention knobs for shanks of forms
AC, AD, AF, UC, UD, UF, JD and JF**

iTeh STANDARD PREVIEW
*Queues d'outils à conicité 7/24 pour changement automatique
d'outils —
(standards.iteh.ai)*
Partie 3: Tirettes pour queues de formes AC, AD, AF, UC, UD, UF, JD et JF

[ISO 7388-3:2013](https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013)

<https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 7388-3:2013](https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013)

<https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Dimensions	1
3.1 General.....	1
3.2 Retention knobs, shank form AD, for centric inner cooling lubricant supply	1
3.3 Retention knobs, shank form AF, without cooling lubricant supply	2
3.4 Retention knobs, shank form UD, for centric inner cooling lubricant supply	3
3.5 Retention knobs, shank form UF, without cooling lubricant supply.....	4
3.6 Retention knobs for shank form JD with centric inner cooling supply	5
3.7 Retention knobs, shank form JF, without cooling lubricant supply.....	6
3.8 Retention knobs with data medium, forms AC and UC	7
4 Material	7
5 O-ring	8
6 Designation	8
Bibliography	9

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 7388-3:2013](https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013)

<https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information.

The committee responsible for this document is ISO/TC 29, Small tools.

This second edition cancels and replaces the first edition (ISO 7388-3:2007), which has been technically revised.

ISO 7388 consists of the following parts, under the general title *Tool shanks with 7/24 taper for automatic tool changers*:

- Part 1: Dimensions and designation of shanks of forms A, AD, AF, U, UD, and UF
- Part 2: Dimensions and designation of shanks of forms J, JD, and JF
- Part 3: Retention knobs for shanks of forms AC, AD, AF, UC, UD, UF, JD, and JF

Introduction

The aim of ISO 7388 is to integrate existing standards which are most commonly used as an industrial standard. In addition, the different developments for cooling and data chip have been taken into account.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 7388-3:2013](https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013)

<https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 7388-3:2013

<https://standards.iteh.ai/catalog/standards/sist/0cd61380-5464-4433-94fa-f86c1eb56519/iso-7388-3-2013>

Tool shanks with 7/24 taper for automatic tool changers —

Part 3:

Retention knobs for shanks of forms AC, AD, AF, UC, UD, UF, JD and JF

1 Scope

This part of ISO 7388 specifies the dimensions of retention knobs for tool shanks with a 7/24 taper of shank forms A, AD, AF, UC, UD, UF, JD, and JF for automatic tool changers used on machines having an automatic gripping system for feeding tools from the magazine to the spindle and vice-versa. These tools are designed with the most important dimensions for use in spindle noses according to ISO 9270.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1629, *Rubber and latices — Nomenclature*

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 7388-3:2013

ISO 2768-2, *General tolerances — Part 2: Geometrical tolerances for features without individual tolerance indications*

ISO 8015, *Geometrical product specifications (GPS) — Fundamentals — Concepts, principles and rules*


3 Dimensions

3.1 General

All dimensions and tolerances are given in millimetres; tolerancing is according to ISO 8015. Tolerances not specified shall be of tolerance class “m” in accordance with ISO 2768-1 and of class “k” in accordance with ISO 2768-2.

3.2 Retention knobs, shank form AD, for centric inner cooling lubricant supply

The dimensions of retention knobs for shanks of form AD shall be in accordance with the dimensions shown in [Figure 1](#) and given in [Table 1](#).

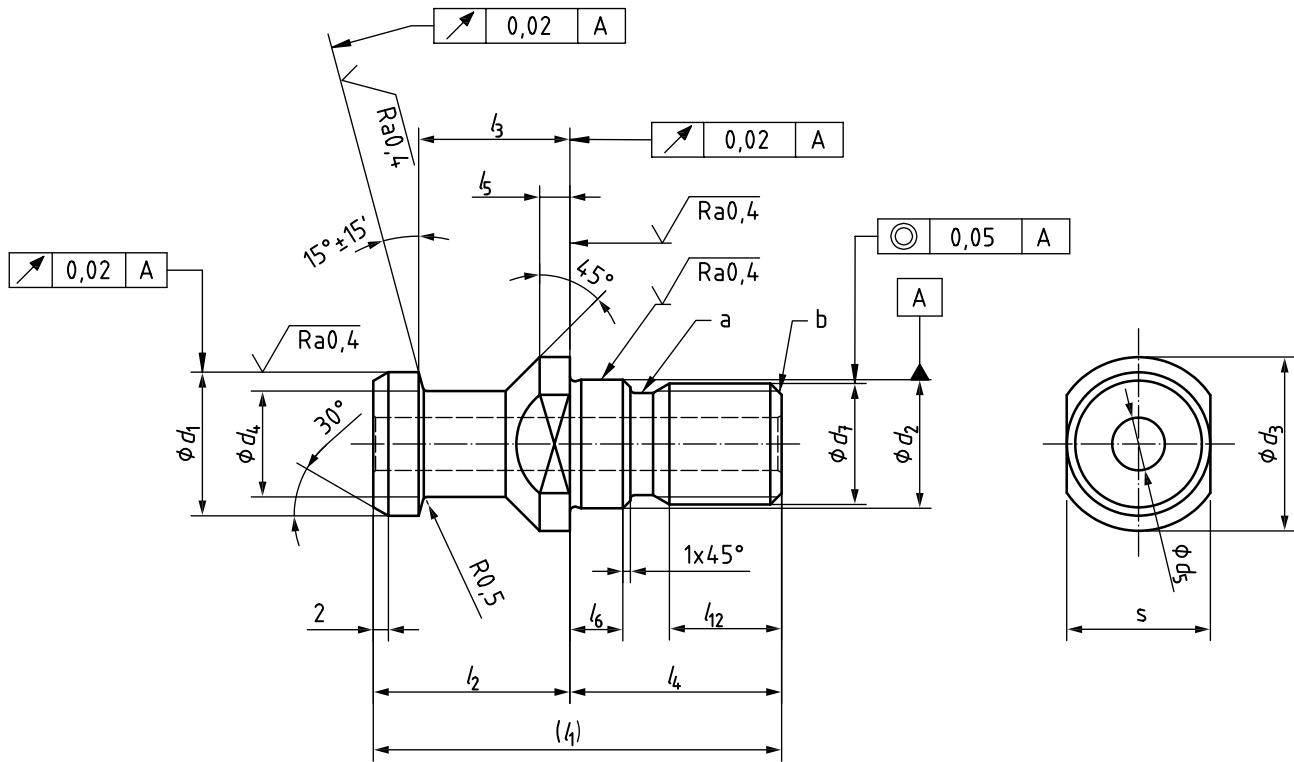

Key

- a Thread undercut, at the manufacturer's discretion.
- b Chamfered end (CH), according to ISO 4753.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 7388-3:2013
Figure 1 — Retention knob — Form AD — Centric inner cooling supply

Table 1 — Retention knobs — Form AD — Dimensions

Shank no.	Dimension													
	d_1	d_2	d_3	d_4	d_5	d_7	l_1	l_2	l_3	l_4	l_5	l_6	l_{12}	s
	f7	f7	$\begin{matrix} 0 \\ -0,2 \end{matrix}$	$\begin{matrix} 0 \\ -0,1 \end{matrix}$	$\begin{matrix} +0,1 \\ 0 \end{matrix}$			$\pm 0,1$	$\pm 0,1$	$\begin{matrix} +0,5 \\ 0 \end{matrix}$			min.	$\begin{matrix} 0 \\ -0,1 \end{matrix}$
30	13	13	17	9	—	M12	44	24	19	20	4	5	10	14
40	19	17	23	14	7	M16	54	26	20	28	4	7	13	19
45	23	21	30	17	9,5	M20	65	30	23	35	5	8	16	24
50	28	25	36	21	11,5	M24	74	34	25	40	5	10	19	30
60	40	32	52	30	14	M30	90	40	30	50	6	12	24	46

3.3 Retention knobs, shank form AF, without cooling lubricant supply

The dimensions of retention knobs for shanks of form AF shall be in accordance with the dimensions shown in [Figure 2](#) and given in [Table 2](#). Other dimensions are the same as that of shank form AD.

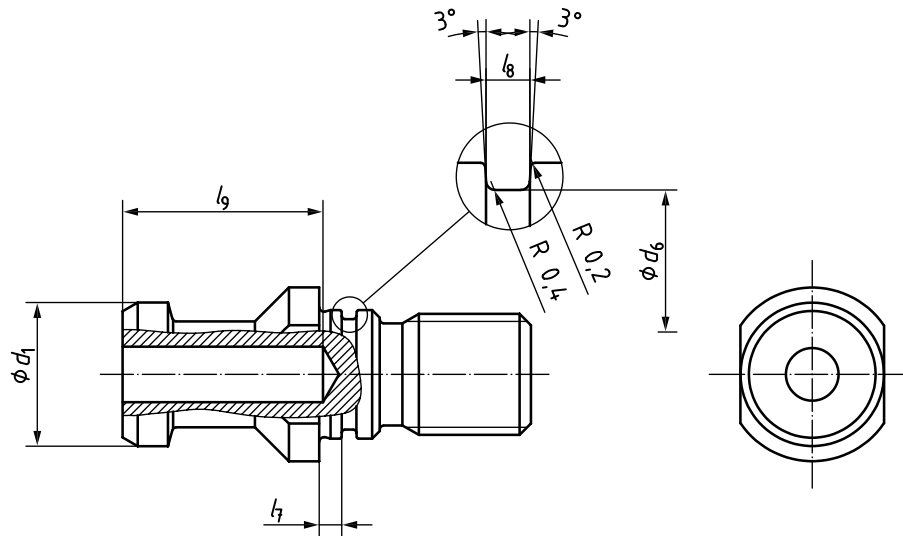


Figure 2 — Retention knob — Form AF — Without cooling lubricant supply

Table 2 — Retention knobs — Form AF — Dimensions

Shank no.	Dimension				O-ring	
	d_1 f7	d_6 h11	l_7 0 -0,1	l_8 +0,2 0		
30	13	11,5	2,3	1,4	—	11 × 1,0
40	19	14,6	3,0	1,9	27	14 × 1,5
45	23	17,8	3,3	2,5	33	17 × 2,0
50	28	20,8	4,5	3,0	37	20 × 2,5
60	40	27,8	5,5	3,0	45	27 × 2,5

3.4 Retention knobs, shank form UD, for centric inner cooling lubricant supply

The dimensions of retention knobs for shanks of form UD shall be in accordance with the dimensions shown in Figure 3 and given in Table 3.