
**Cutting tool data representation and
exchange —**

**Part 309:
Creation and exchange of 3D models
— Tool holders for indexable inserts**

*Représentation et échange des données relatives aux outils coupants —
Partie 309: Création et échange de modèles 3D — Supports pour
outils à plaquettes amovibles*

*ITeH STANDARD PREVIEW
(standards.iteh.ai/catalog/standards/sist/13399-309-2015-5cd3-4939-a0c8-3bec6446ba7d/iso-ts-13399-309-2015-5cd3-4939-a0c8-3bec6446ba7d)*

PROOF / ÉPREUVE



iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/b53184f7-5cd3-4939-a0c8-3bee6446ba7d/iso-ts-13399-309-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	vi
Introduction	viii
1 Scope	1
2 Normative references	1
3 Starting elements, coordinate systems, planes	2
3.1 General.....	2
3.2 Reference system (PCS — primary coordinate system).....	2
3.3 Tool item position.....	2
3.3.1 Prismatic tool position.....	3
3.3.2 Round tool position.....	3
3.4 Planes.....	4
3.5 Cutting reference point (CRP).....	5
3.6 Design of the pocket seat.....	8
3.7 Adjustment coordinate system on workpiece side.....	12
3.7.1 General.....	12
3.7.2 Designation of the coordinate system workpiece side.....	12
4 Design of the model	14
4.1 Necessary parameters for the connection interface feature.....	14
4.2 Necessary properties for insert and pocket seat.....	15
4.2.1 General.....	15
4.2.2 Properties for equilateral, equiangular and equilateral, non- equiangular inserts.....	15
4.2.3 Properties for non-equilateral, equiangular and non-equilateral, non- equiangular inserts.....	15
4.2.4 Properties for round inserts.....	16
4.2.5 Design of the pocket seat feature.....	16
5 Tool holder for longitudinal and transversal turning	17
5.1 General.....	17
5.2 Necessary properties.....	17
5.3 Basic geometry.....	18
5.4 Turning tool with pocket seat and top surface offset.....	21
5.5 Turning tool assembly.....	22
5.6 Boring bar body.....	23
6 Turning tool for external threading	24
6.1 General.....	24
6.2 Necessary properties.....	25
6.3 Basic geometry.....	25
6.4 Turning tool with pocket seat and top surface offset.....	26
6.5 Turning tool assembly.....	26
7 Boring bar for internal threading	27
7.1 General.....	27
7.2 Necessary properties.....	27
7.3 Basic geometry.....	28
7.4 Boring bar with pocket seat and top surface offset.....	29
7.5 Boring bar assembly.....	30
8 Turning tool for OD grooving and parting	30
8.1 General.....	30
8.2 Necessary properties.....	30
8.3 Basic geometry.....	32
8.4 Grooving tool with pocket seat and top surface offset.....	33
8.5 Grooving and cut-off tool assembly.....	33

9	Boring bar for ID grooving	34
	9.1 General.....	34
	9.2 Necessary properties.....	34
	9.3 Basic geometry.....	35
	9.4 Boring bar with pocket seat and top surfaces.....	36
	9.5 Grooving boring bar assembly.....	37
10	Pull back boring bar	37
	10.1 General.....	37
	10.2 Necessary properties.....	38
	10.3 Basic geometry.....	38
	10.4 Boring bar with pocket seat and top surfaces.....	39
	10.5 Pull back boring bar assembly.....	39
11	System tool for external turning	40
	11.1 General.....	40
	11.2 Necessary properties.....	40
	11.3 Basic geometry.....	41
	11.4 System tool with pocket seat and top surfaces.....	41
	11.5 Assembly of system tool for external turning.....	42
12	System tool for external threading	43
	12.1 General.....	43
	12.2 Necessary properties.....	43
	12.3 Basic geometry.....	44
	12.4 System tool with pocket seat and top surfaces.....	44
	12.5 Assembly of a system tool for external threading.....	44
13	System tool for internal turning	44
	13.1 General.....	44
	13.2 Necessary properties.....	45
	13.3 Basic geometry.....	45
	13.4 System tool with pocket seat and top surfaces.....	45
	13.5 System tool for internal turning assembly.....	45
14	System tool for internal threading	46
	14.1 General.....	46
	14.2 Necessary properties.....	46
	14.3 Basic geometry.....	46
	14.4 System tool with pocket seat and top surfaces.....	46
	14.5 System tool for internal threading assembly.....	46
15	System tool for OD grooving and/or cut-off	47
	15.1 General.....	47
	15.2 Necessary properties.....	47
	15.3 Basic geometry.....	48
	15.4 Grooving tool with pocket seat and top surface offset.....	48
	15.5 System tool for OD grooving and parting assembly.....	48
16	System tool for ID grooving	49
	16.1 General.....	49
	16.2 Necessary properties.....	49
	16.3 Basic geometry.....	49
	16.4 Grooving tool with pocket seat and top surface offset.....	49
	16.5 System tool for ID grooving assembly.....	49
17	Pull back system tool	50
	17.1 General.....	50
	17.2 Necessary properties.....	50
	17.3 Basic geometry.....	50
	17.4 System tool with pocket seat and top surfaces.....	50
	17.5 Pull back system tool assembly.....	51

18	System tool, neutral design for OD turning	51
18.1	General.....	51
18.2	Necessary properties.....	51
18.3	Basic geometry.....	51
18.4	System tool with pocket seat and top surfaces.....	51
18.5	System tool, neutral design for OD turning assembly.....	52
19	Design of details	52
19.1	Basics for modelling.....	52
19.2	Fixing threads for inserts.....	52
19.3	Contact surfaces/drive keys — Orientation.....	52
19.4	Chamfers and roundings.....	52
20	Attributes of surfaces — Visualization of the model features	52
21	Structure of the design elements (tree of model)	53
22	Data exchange model	54
	Annex A (normative) Mirror planes for left-handed tools	56
	Annex B (informative) Information about nominal dimensions	57
	Bibliography	58

iTeh STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/b53184f7-5cd3-4939-a0c8-3bee6446ba7d/iso-ts-13399-309-2016>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 29, *Small tools*.

ISO/TS 13399 consists of the following parts, under the general title *Cutting tool data representation and exchange*:

- *Part 1: Overview, fundamental principles and general information model*
- *Part 2: Reference dictionary for the cutting items* [Technical Specification]
- *Part 3: Reference dictionary for tool items* [Technical Specification]
- *Part 4: Reference dictionary for adaptive items* [Technical Specification]
- *Part 5: Reference dictionary for assembly items* [Technical Specification]
- *Part 50: Reference dictionary for reference systems and common concepts* [Technical Specification]
- *Part 60: Reference dictionary for connection systems* [Technical Specification]
- *Part 80: Creation and exchange of 3D models — Overview and principles* [Technical Specification]
- *Part 100: Definitions, principles and methods for reference dictionaries* [Technical Specification]
- *Part 150: Usage guidelines* [Technical Specification]
- *Part 201: Creation and exchange of 3D models — Regular inserts* [Technical Specification]
- *Part 202: Creation and exchange of 3D models — Irregular inserts* [Technical Specification]
- *Part 203: Creation and exchange of 3D models — Replaceable inserts for drilling* [Technical Specification]
- *Part 204: Creation and exchange of 3D models — Inserts for reaming* [Technical Specification]
- *Part 301: Concept for the design of 3D models based on properties according to ISO/TS 13399-3: Modelling of thread-cutting taps, thread-forming taps and thread-cutting dies* [Technical Specification]

- *Part 302: Concept for the design of 3D models based on properties according to ISO/TS 13399-3: Modelling of solid drills and countersinking tools* [Technical Specification]
- *Part 309: Creation and exchange of 3D models — Tool holders for indexable inserts* [Technical Specification]
- *Part 303: Creation and exchange of 3D models — Solid end mills* [Technical Specification]
- *Part 304: Creation and exchange of 3D models — Solid milling cutters with arbor hole* [Technical Specification]
- *Part 307: Creation and exchange of 3D models — End mills for indexable inserts* [Technical Specification]
- *Part 308: Creation and exchange of 3D models — Milling cutters with arbor hole for indexable inserts* [Technical Specification]
- *Part 311: Creation and exchange of 3D models — Solid reamers* [Technical Specification]
- *Part 312: Creation and exchange of 3D models — Reamers for indexable inserts* [Technical Specification]
- *Part 401: Creation and exchange of 3D models — Converting, extending and reducing adaptive items* [Technical Specification]

The following parts are under preparation:

- *Part 70: Graphical data layout — Layer settings for tool designs* [Technical Specification]
- *Part 71: Graphical data layout — Creation of documents for the standardized data exchange — Graphical product information* [Technical Specification]
- *Part 72: Creation of documents for the standardized data exchange — Definition of properties for drawing header and their XML-data exchange* [Technical Specification]
- *Part 305: Creation and exchange of 3D models — Modular tooling systems with adjustable cartridges for boring* [Technical Specification]
- *Part 310: Creation and exchange of 3D models — Turning tools with carbide tips* [Technical Specification]
- *Part 405: Creation and exchange of 3D models — Collets* [Technical Specification]

The designation system for customer solution cutting tools is to form the subject of a future Part 51.

Introduction

This part of ISO/TS 13399 defines the concept, the terms and the definitions on how to design simplified 3D models of turning tools for indexable inserts that can be used for NC-programming, simulation of the manufacturing processes and the determination of collision within these processes. It is not intended to standardize the design of the cutting tool itself.

A cutting tool is used in a machine to remove material from a workpiece by a shearing action at the cutting edges of the tool. Cutting tool data that can be described by this International Standard include, but are not limited to, everything between the workpiece and the machine tool. Information about inserts, solid tools, assembled tools, adaptors, components and their relationships can be represented by this International standard. The increasing demand providing the enduser with 3D models for the purposes defined above is the basis for the development of this series of International Standards.

The objective of this International Standard is to provide the means to represent the information that describes cutting tools in a computer sensible form that is independent from any particular computer system. The representation will facilitate the processing and exchange of cutting tool data within and between different software systems and computer platforms and support the application of this data in manufacturing planning, cutting operations and the supply of tools. The nature of this description makes it suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases and for archiving. The methods that are used for these representations are those developed by ISO/TC 184/SC 4 for the representation of product data by using standardized information models and reference dictionaries.

Definitions and identifications of dictionary entries are defined by means of standard data that consist of instances of the EXPRESS entity data types defined in the common dictionary schema, resulting from a joint effort between ISO/TC 184/SC 4 and IEC/TC 3/SC 3D and in its extensions defined in ISO 13584-24 and ISO 13584-25.

Cutting tool data representation and exchange —

Part 309:

Creation and exchange of 3D models — Tool holders for indexable inserts

1 Scope

This part of ISO 13399 specifies a concept for the design of turning tools for indexable inserts, together with the usage of the related properties and domains of values.

This part of ISO 13399 specifies a common way of designing simplified models that contain the following:

- definitions and identifications of the design features of turning tools for indexable inserts, with an association to the descriptive properties and dimensions;
- definition and identification of the 3D model internal structure that represents the features and the properties of turning tools for indexable inserts.

The following are outside the scope of this part of ISO 13399:

- applications where these standard data may be stored or referenced;
- concept of 3D models for cutting tools;
- concept of 3D models for cutting items;
- concept of 3D models for other tool items not being described in the scope of this part of ISO 13399;
- concept of 3D models for adaptive items;
- concept of 3D models for assembly items and auxiliary items.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5608, *Turning and copying tool holders and cartridges for indexable inserts — Designation*

ISO/TS 13399-2, *Cutting tool data representation and exchange — Part 2: Reference dictionary for the cutting items*

ISO/TS 13399-3, *Cutting tool data representation and exchange — Part 3: Reference dictionary for tool items*

ISO/TS 13399-4, *Cutting tool data representation and exchange — Part 4: Reference dictionary for adaptive items*

ISO/TS 13399-50, *Cutting tool data representation and exchange — Part 50: Reference dictionary for reference systems and common concepts*

ISO/TS 13399-60, *Cutting tool data representation and exchange — Part 60: Reference dictionary for connection systems*

ISO/TS 13399-80, *Cutting tool data representation and exchange — Part 80: Creation and exchange of 3D models — Overview and principles*

ISO/TS 13399-201, *Cutting tool data representation and exchange — Part 201: Creation and exchange of 3D models — Regular inserts*

3 Starting elements, coordinate systems, planes

3.1 General

Modelling of the 3D models shall be done by means of nominal dimensions.

WARNING — There is no guarantee that the 3D model, created according to the methods described in this part of ISO/TS 13399, is a true representation of the physical tool supplied by the tool manufacturer. If the models are used for simulation purposes, e.g. CAM simulation, it shall be taken into consideration that the real product dimensions can differ from those nominal dimensions.

NOTE 1 Some of the definitions are taken from ISO/TS 13399-50.

3.2 Reference system (PCS — primary coordinate system)

The reference system shall consist of the following standard elements as shown in [Figure 1](#):

- **standard coordinate system**: right-handed rectangular Cartesian system in three dimensional space, called “primary coordinate system” (PCS)
- **3 orthogonal planes**: planes in the coordinate system that contain the axis of the system, named “xy-plane” (XYP), “xz-plane” (XZP) and “yz-plane” (YZP)
- **3 orthogonal axis**: axes built as intersections of the 3 orthogonal planes lines respectively, named “x-axis” (XA), “y-axis” (YA) and “z-axis” (ZA)

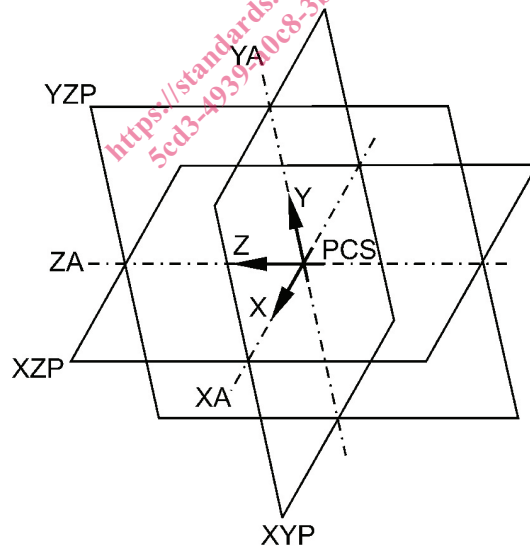


Figure 1 — Primary coordinate system

3.3 Tool item position

The definition of the tool position in [3.3.1](#) and [3.3.2](#) applies to right-handed tools. Left hand tools are as defined for right hand items but mirrored through the YZ-plane.

3.3.1 Prismatic tool position

A prismatic tool position identifies the location on the coordinate reference system of a turning tool with planar sides and a rectangular cross section, as shown in [Figure 2](#), where

- the base of the tool item shall be coplanar with the XZ-plane,
- the normal for the base of the item shall be in the -Y direction,
- the rear backing surface shall be coplanar with the YZ-plane,
- the normal for the rear backing surface shall be in the X direction,
- the end of the item shall be coplanar with the XY-plane,
- the normal for the end of the item shall be in the Z direction,
- the rake face of the primary cutting item shall be completely visible in the -X-Z quadrant, and
- for cartridges, the top of the axial adjustment screw shall be coincident with XY-plane.

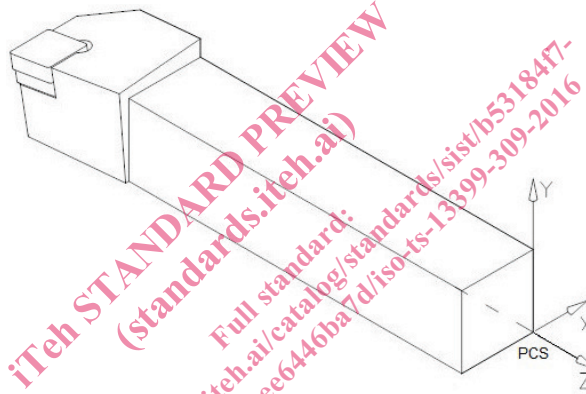


Figure 2 – Prismatic tool position

3.3.2 Round tool position

A round tool position identifies the location on the coordinate reference system of a turning tool with non-planar sided cross section, as shown in [Figures 3](#) and [4](#), where

- the axis of the tool item shall be collinear with the Z-axis,
- the vector of the shank that points in the -Z direction shall also point towards the workpiece side,
- the drive slots or clamping flats, if present, shall be parallel with the XZ-plane,
- the contact surface of the coupling, the gauge plane or the end of the cylindrical shank shall be coplanar with the XY-plane,
- the rake face of the primary cutting item shall be visible in the -X-Z quadrant, and
- if a bore is present, the vector of the bore of the item that points in the -Z direction shall also point towards the workpiece side.

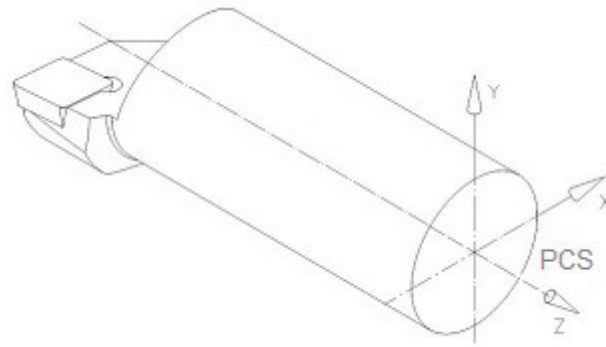


Figure 3 — Round tool position — Cylindrical shank

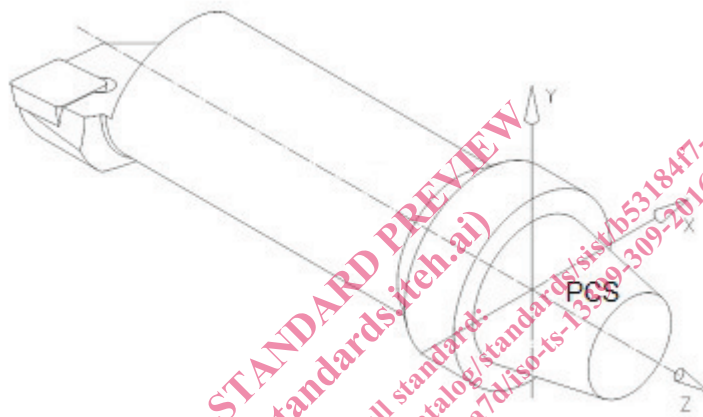


Figure 4 — Round tool position — Gauge plane or planar contact surface

3.4 Planes

The modelling shall be based on planes according to [Figures 5](#) and [6](#), which shall be used as reference, if applicable. Therefore, it is assured that the model can be varied to suppress single features of independent design features by means of changing the value of one or more parameters. Furthermore, the identification of the different features shall be simplified in using the plane concept, even if they contact each other with the same size, e.g. chip flute, shank.

For the 3D visualization of turning tools for indexable inserts the general planes shall be determined as follows:

- “CDP” cutting depth plane: plane for the maximum cutting depth (CDX); based on “HEP”;
- “HEP” head end plane: plane for most front point of the tool; based on either LPR for tools with gauge line or contact surface or OAL for tools without gauge plane or contact surface;
- “HFP” functional height plane: plane for the functional height (HF); based on XZ plane of PCS;
- “LSCP” clamping length plane: plane for the clamping length (LSC); based on XY plane of PCS;
- “LFP” functional length plane: plane for the functional length (LF); based on XY plane of PCS;
- “LHP” head length plane: plane for the head length (LH); based on “HEP”;
- “TCEP” tool cutting edge plane: plane perpendicular to the XY plane of a master insert through its major cutting edge;

- “TEP” tool end plane: the tool end plane is located at that end of the connection that points away from the workpiece, if the tool does not have a contact surface and/or a gauge line the TEP is coplanar with the XY-plane of the PCS. The overall length (OAL) is the distance between HEP and TEP;
- “TFP” tool feed plane: plane perpendicular to the XZ plane that is parallel to the primary feed direction of the tool and that is tangential to the cutting corner of the master insert;
- “TRP” tool rake plane: plane that contains the cutting edges of a master insert;
- “TSP” theoretical sharp point: the intersection in the tool rake plane of the two planes that are perpendicular to the XY plane of the master insert through the major and minor cutting edges of the master insert;
- “WFP” plane for the functional width (WF); based on YZ plane of PCS.

3.5 Cutting reference point (CRP)

The cutting reference point is the theoretical point of the cutting tool from which the major functional dimensions are taken.

For the calculation of this point, the following cases apply.

- Case 1: For a tool cutting edge angle less than or equal to 90° , the point is the intersection of TCEP, TFP and TRP (see Figures 5 and 6).

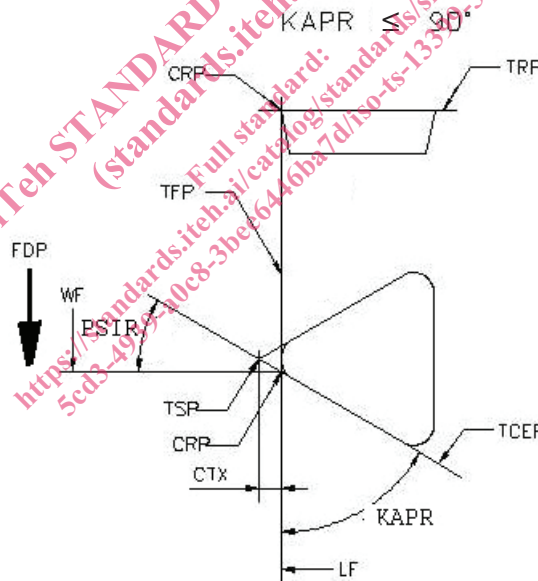


Figure 5 — Feed direction perpendicular to tool axis — $KAPR \leq 90^\circ$