

# DRAFT INTERNATIONAL STANDARD

## ISO/DIS 4263-3

ISO/TC 28

Secretariat: NEN

Voting begins on:  
2013-09-26

Voting terminates on:  
2014-02-26

---

---

## Petroleum and related products — Determination of the ageing behaviour of inhibited oils and fluids using the TOST test —

### Part 3: Anhydrous procedure for synthetic hydraulic fluids

*Pétrole et produits connexes — Détermination du comportement au vieillissement des fluides et huiles inhibés au moyen de l'essai TOST —*

*Partie 3: Méthode anhydre pour les fluides hydrauliques synthétiques*

[Revision of second edition (ISO 4263-3:2010)]

ICS: 75.120

**ITeH STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sis/ba3176a37d0-4336-bfb2-8583acdcada0/iso-4263-3-2015>

### ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel five month enquiry.

Should this draft be accepted, a final draft, established on the basis of comments received, will be submitted to a parallel two-month approval vote in ISO and formal vote in CEN.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.



Reference number  
ISO/DIS 4263-3:2013(E)

© ISO 2013

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/ba3176ff-37d0-4336-bfb2-8583acdcada0/iso-4263-3-2015>

### Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

## Contents

	Page
<b>1</b> <b>Scope</b> .....	<b>7</b>
<b>2</b> <b>Normative references</b> .....	<b>7</b>
<b>3</b> <b>Principle</b> .....	<b>7</b>
<b>4</b> <b>Reagents and materials</b> .....	<b>8</b>
<b>5</b> <b>Apparatus</b> .....	<b>9</b>
<b>6</b> <b>Sampling</b> .....	<b>10</b>
<b>7</b> <b>Preparation of materials and apparatus</b> .....	<b>10</b>
7.1 <b>Cleaning the catalyst wire</b> .....	<b>10</b>
7.2 <b>Preparation of catalyst coil</b> .....	<b>11</b>
7.3 <b>Storage of the catalyst coil</b> .....	<b>11</b>
7.4 <b>Cleaning new glassware</b> .....	<b>11</b>
7.5 <b>Cleaning used glassware</b> .....	<b>11</b>
7.6 <b>Cleaning aliquot-removal device</b> .....	<b>11</b>
<b>8</b> <b>Procedure</b> .....	<b>11</b>
<b>9</b> <b>Calculation</b> .....	<b>13</b>
<b>10</b> <b>Expression of results</b> .....	<b>13</b>
<b>11</b> <b>Precision</b> .....	<b>13</b>
11.1 <b>General</b> .....	<b>13</b>
11.2 <b>Repeatability, <math>r</math></b> .....	<b>13</b>
11.3 <b>Reproducibility, <math>R</math></b> .....	<b>14</b>
11.4 <b>Reproducibility with duplicate tests</b> .....	<b>14</b>
<b>12</b> <b>Test report</b> .....	<b>14</b>
<b>Annex A (normative) Liquid-in-glass thermometer specifications</b> .....	<b>15</b>
<b>Annex B (normative) Procedure for packaging and storage of catalyst coils</b> .....	<b>16</b>
<b>Annex C (informative) Method for the determination of the insolubles content of mineral oils and anhydrous synthetic fluids</b> .....	<b>17</b>
<b>Annex D (informative) Appearance rating of catalyst coil wires</b> .....	<b>19</b>
<b>Annex E (informative) Determination of metals content</b> .....	<b>21</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4263-3 was prepared by Technical Committee ISO/TC 28, Petroleum products and lubricants, and by Technical Committee CEN/TC 19, Gaseous and liquid fuels, lubricants and related products of petroleum, synthetic and biological origin, in collaboration.

This third edition cancels and replaces the second edition (EN ISO 4263-3:2010). Main changes are the revision of the calculation as in Clause 9, where the acid number of the fresh unoxidised fluid has been introduced, and the inclusion of HETG in and the exclusion of HFDR from the scope.

ISO 4263 consists of the following parts, under the general title *Petroleum and related products — Determination of the ageing behaviour of inhibited oils and fluids using the TOST test*:

- *Part 1: Procedure for mineral oils;*
- *Part 2: Procedure for category HFC hydraulic fluids;*
- *Part 3: Anhydrous procedure for synthetic hydraulic fluids;*
- *Part 4: Procedure for industrial gear oils.*

# Petroleum and related products — Determination of the ageing behaviour of inhibited oils and fluids using the TOST test — Part 3: Anhydrous procedure for synthetic hydraulic fluids

**WARNING** — The use of this part of ISO 4263 can involve hazardous materials, operations and equipment. This part of ISO 4263 does not purport to address all of the safety problems associated with its use. It is the responsibility of the user of this part of ISO 4263 to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

## 1 Scope

This part of ISO 4263 specifies a method for the determination of the ageing behaviour of synthetic hydraulic fluids of categories HFDU, HEES and HEPG, HETG as defined, for example, in ISO 12922<sup>[1]</sup> and ISO 15380<sup>[2]</sup>. The ageing is accelerated by the presence of oxygen and metal catalysts at elevated temperature, and the degradation of the fluid is followed by changes in acid number. Other parts of ISO 4263 specify similar procedures for the determination of ageing behaviour of mineral oils and specified categories of fire-resistant fluids used in hydraulic and other applications.

**NOTE** Other signs of fluid deterioration, such as the formation of insoluble sludge, catalyst coil corrosion or decrease in viscosity, can occur which indicate oxidation of the fluid, but are not reflected in the calculated oxidation lifetime. The correlation of these occurrences with field service is under investigation.

This test method may be used to compare the oxidation stability of fluids that are not prone to contamination with water. However, because of the large number of individual field-service applications, the correlation between the results of this test and actual service performance can vary markedly, and is best judged on experience.

The precision of this test method for synthetic hydraulic fluids is not known because inter-laboratory data are not available. This method might not be suitable for use in specifications or in the event of disputed results as long as these data are not available. However, precision for inhibited turbine oils is given in Clause 11 for guidance as an indication of the precision that could be obtained for synthetic hydraulic fluids.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3170:2004, *Petroleum liquids — Manual sampling*

ISO 3696:1987, *Water for analytical laboratory use — Specification and test methods*

ISO 7537:1997, *Petroleum products — Determination of acid number — Semi-micro colour-indicator titration method*

## 3 Principle

A test portion is reacted, in the absence of light, at 95 °C with oxygen and a steel and copper catalyst coil. Small aliquots of the fluid are withdrawn at regular intervals and the acid number is measured (see the Note in Clause 1). The test is continued until an acid number increase of 2,0 mg of potassium hydroxide

(KOH) per gram of test portion is reached and the number of hours is recorded as the oxidation lifetime. For some requirements, the test may be discontinued at a fixed number of hours (e.g. 500 h or 1 000 h) when the value of the acid number has still not increased by 2,0 mg of KOH per gram of test portion.

## 4 Reagents and materials

**4.1 Water**, unless otherwise specified, in accordance with the requirements of grade 2 of ISO 3696. Potable water means tap water, unless normal piped supplies are contaminated with particulate or highly soluble mineral content.

**4.2 Heptane**, (C<sub>7</sub>H<sub>16</sub>), of minimum purity 99,75 %.

**4.3 Acetone**, (CH<sub>3</sub>COCH<sub>3</sub>), of general purpose reagent grade (GPR).

**4.4 Propan-2-ol**, (CH<sub>3</sub>CHOHCH<sub>3</sub>), of general purpose reagent grade (GPR).

**4.5 Oxygen**, of minimum purity 99,5 %, supplied through a pressure-regulation system adequate to maintain the specified flow rate throughout the test duration.

Supply from an oxygen cylinder should be via a two-stage regulation system and a needle valve to improve the consistency of gas-flow regulation.

**WARNING — Use oxygen only with equipment validated for oxygen service. Do not allow oil or grease to come into contact with oxygen and clean and inspect all regulators, gauges and control equipment. Check the oxygen-supply system regularly for leaks. If a leak is suspected, turn off immediately and seek qualified assistance.**

### 4.6 Cleaning solutions

#### 4.6.1 Strong oxidizing acid solution

The reference strong oxidizing cleaning solution on which precision was based, is chromosulfuric acid (see the following warning), but alternative non-chromium containing solutions, such as ammonium persulfate in concentrated sulfuric acid (8 g/l), have been found to give satisfactory cleanliness. A 10 % solution of three parts of hydrochloric acid (1 mol/l) and one part of orthophosphoric acid (concentrated GPR grade) removes iron oxide deposits.

**WARNING — Chromosulfuric acid is a health hazard. It is toxic, a recognized carcinogen as it contains Cr(VI) compounds, highly corrosive and potentially hazardous in contact with organic materials. When using a chromosulfuric acid cleaning solution, eye protection and protective clothing are essential. Never pipette the cleaning solution by mouth. After use, do not pour cleaning solution down the drain, but neutralize it with great care owing to the concentrated sulfuric acid present, and dispose of it in accordance with standard procedures for toxic laboratory waste (chromium is highly dangerous to the environment).**

Strongly oxidizing acid cleaning solutions that are chromium-free are also highly corrosive and potentially hazardous in contact with organic materials, but do not contain chromium which has special disposal problems.

#### 4.6.2 Surfactant cleaning fluid

A proprietary strong surfactant cleaning fluid is a preferred alternative.

#### 4.6.3 Laboratory detergent, water soluble.

### 4.7 Catalyst wires

**4.7.1 Low-metalloid steel wire**, of diameter 1,60 mm ± 0,05 mm, made of carbon steel, soft bright annealed and free from rust.


**4.7.2 Copper wire, of diameter  $1,63 \text{ mm} \pm 0,05 \text{ mm}$** , made of either electrolytic copper wire of 99,9 % minimum purity or soft copper wire of an equivalent grade.

**4.8 Abrasive cloth**, made of silicon carbide of  $150 \text{ }\mu\text{m}$  (100 grit) with cloth backing, or an equivalent grade of abrasive cloth.

**4.9 Absorbent cotton**

## 5 Apparatus

**5.1 Oxidation cell**, consisting of a large test tube of borosilicate glass with a graduation mark to indicate a volume of  $300 \text{ ml} \pm 1 \text{ ml}$  at  $20 \text{ }^\circ\text{C}$ . A mushroom condenser and oxygen-delivery tube, also of borosilicate glass, fit into the test tube. The design and dimensions shall be as illustrated in Figure 1.

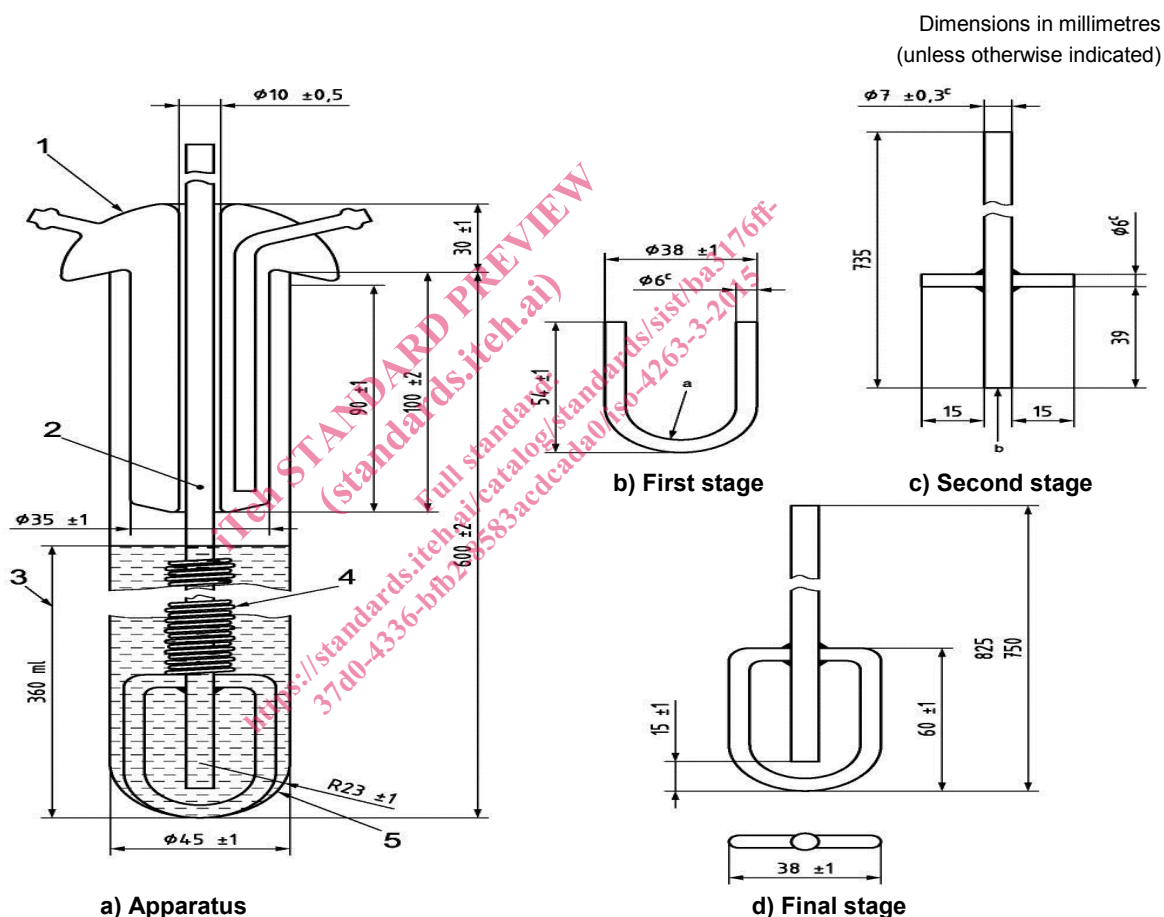

**Figure 1 – Oxidation cell**

**5.2 Heating bath**, consisting of a thermostatically controlled bath capable of maintaining the hydraulic fluid test portion in the oxidation cell at  $95,0 \text{ }^\circ\text{C} \pm 0,2 \text{ }^\circ\text{C}$ . It shall be large enough to hold the required number of oxidation cells (5.1) immersed in the heat transfer medium to a depth of  $355 \text{ mm} \pm 10 \text{ mm}$ . It shall be constructed to ensure that light is excluded from the test portions during the test. If a fluid bath is used, it shall be fitted with a suitable stirring system to provide a uniform temperature throughout the bath. If the fluid bath is fitted with a top, the total length of the oxidation cell within the bath shall be  $390 \text{ mm} \pm 10 \text{ mm}$ . If a metal-block



bath is used, the heaters shall be distributed so as to produce a uniform temperature throughout the bath, and the holes in the block shall have a minimum diameter of 50 mm and a depth, including any insulating cover, of 390 mm ± 10 mm.


**5.3 Flowmeter**, capable of measuring 3,0 l/h with an accuracy of ± 0,1 l/h.

**5.4 Temperature-measurement devices**

**5.4.1 Heating bath**, the temperature in liquid heating baths shall be measured by either a liquid-in-glass thermometer meeting the requirements of the specification given in Annex A, or an equivalent temperature-measurement system readable to ± 0,1 °C and graduated in 0,1 °C increments. For metal-block heating baths, a temperature-measurement system, with possibly more than one device of the same readability and accuracy, is required.

**5.4.2 Oxidation cell**, the temperature in the oxidation cell shall be measured by either a liquid-in-glass thermometer meeting the requirements of the specification given in Annex A, or an equivalent temperature-measurement system readable to ± 0,1 °C and calibrated to better than ± 0,1 °C.

**5.4.3 Thermometer bracket**, if a liquid-in-glass thermometer is used in the oxidation cell, it shall be suspended by means of a bracket as illustrated in Figure 2. The thermometer is held in the bracket by either two fluoro-elastomer O-rings of approximately 5 mm diameter, or by the use of thin, stainless steel wire.

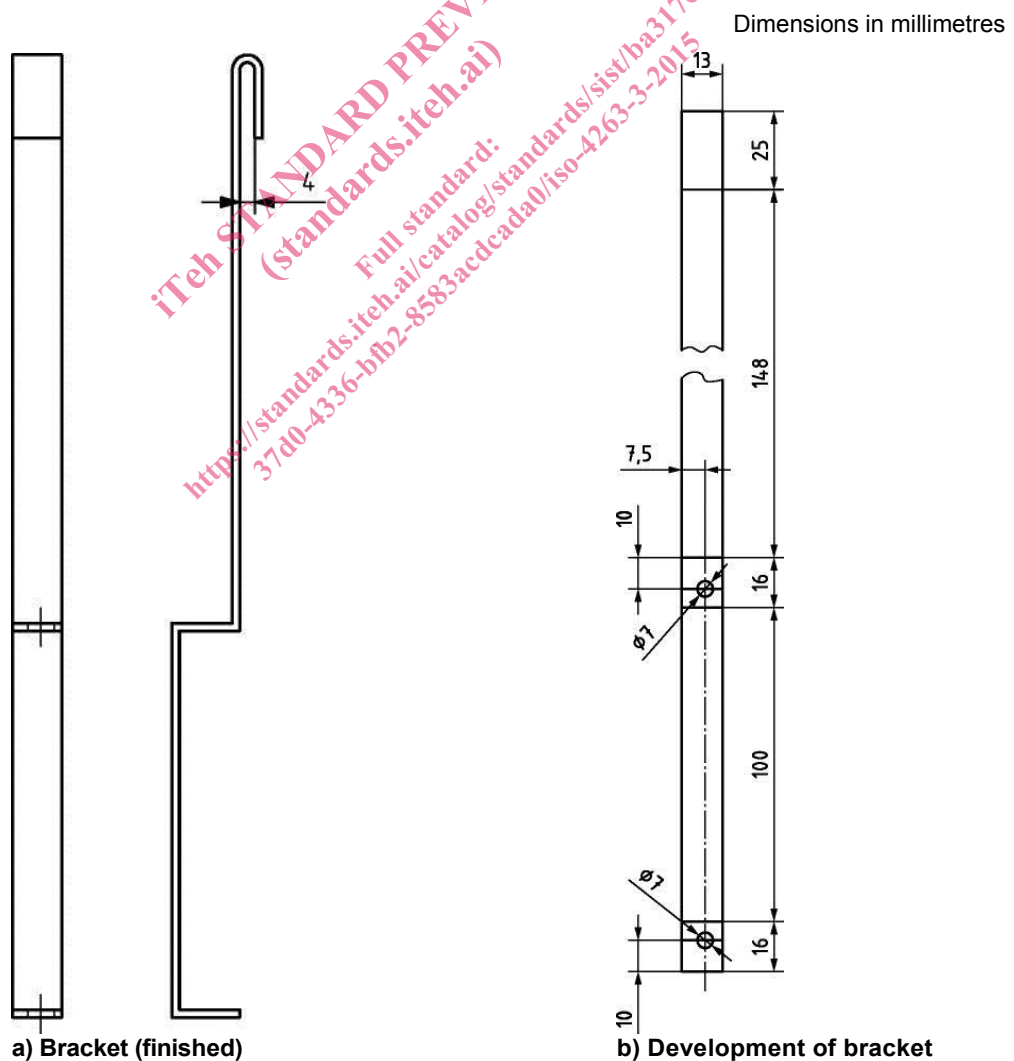

Material: 18/8 (0,792 mm) stainless steel

Figure 2 — Thermometer bracket



5.5 **Wire-coiling mandrel**, as illustrated in Figure 3, is used to produce the double spiral of copper and steel wire. The mandrel is included in a suitable winding device.

Dimensions in millimetres

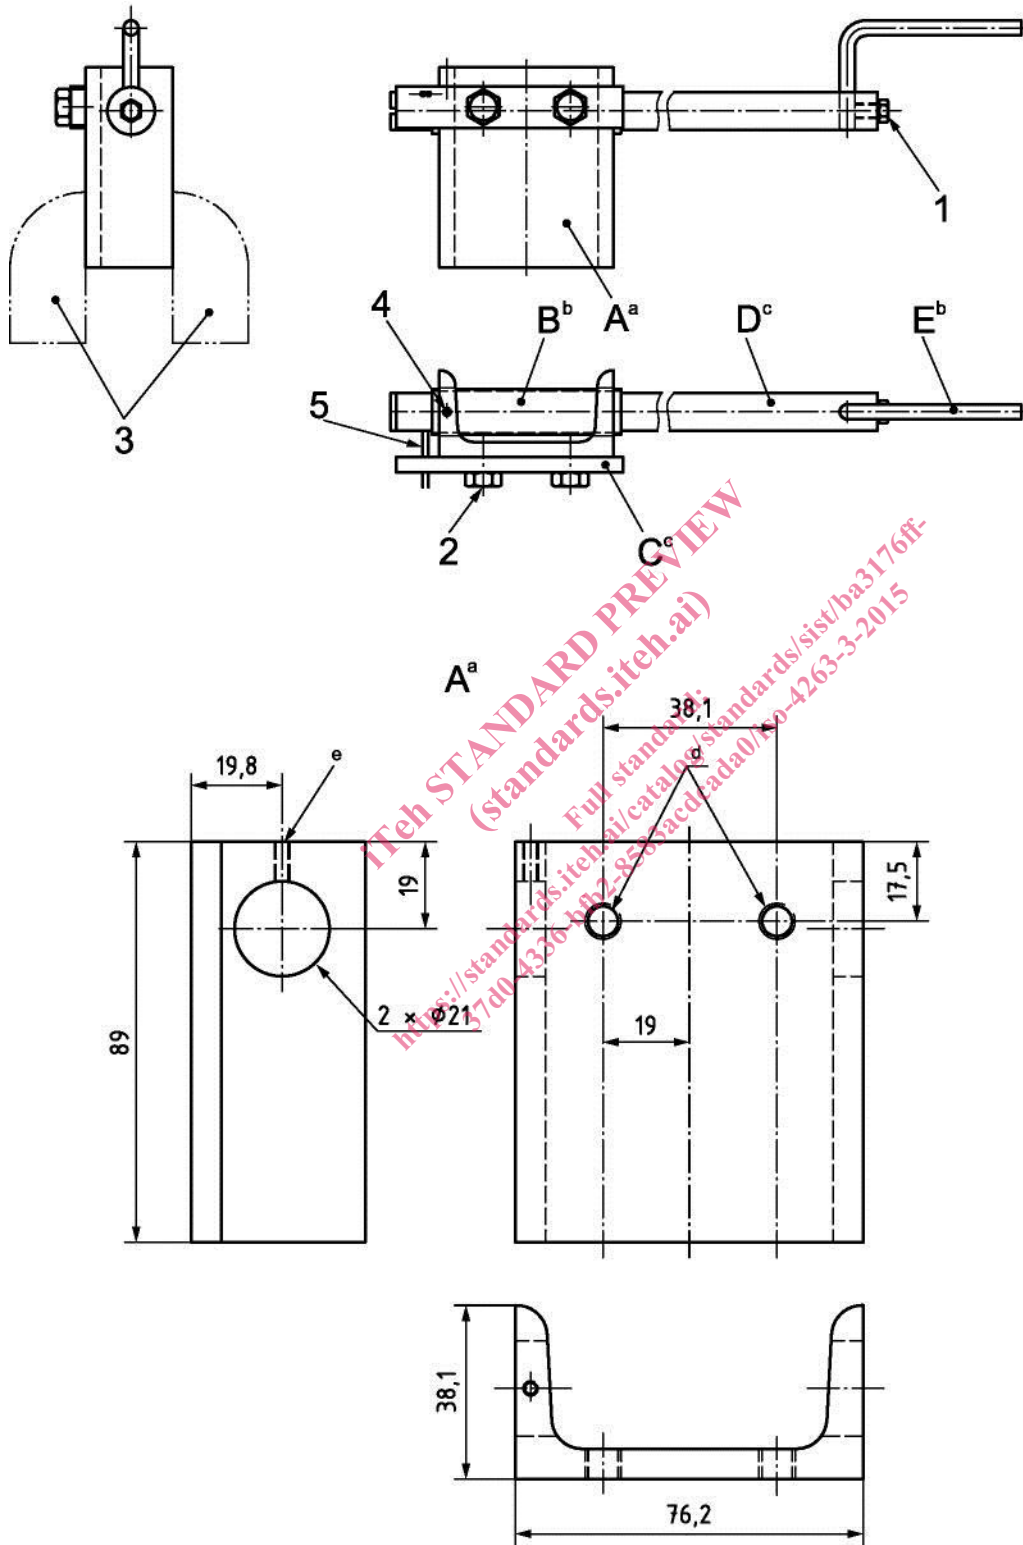


Figure 3 – Catalyst coil mandrel

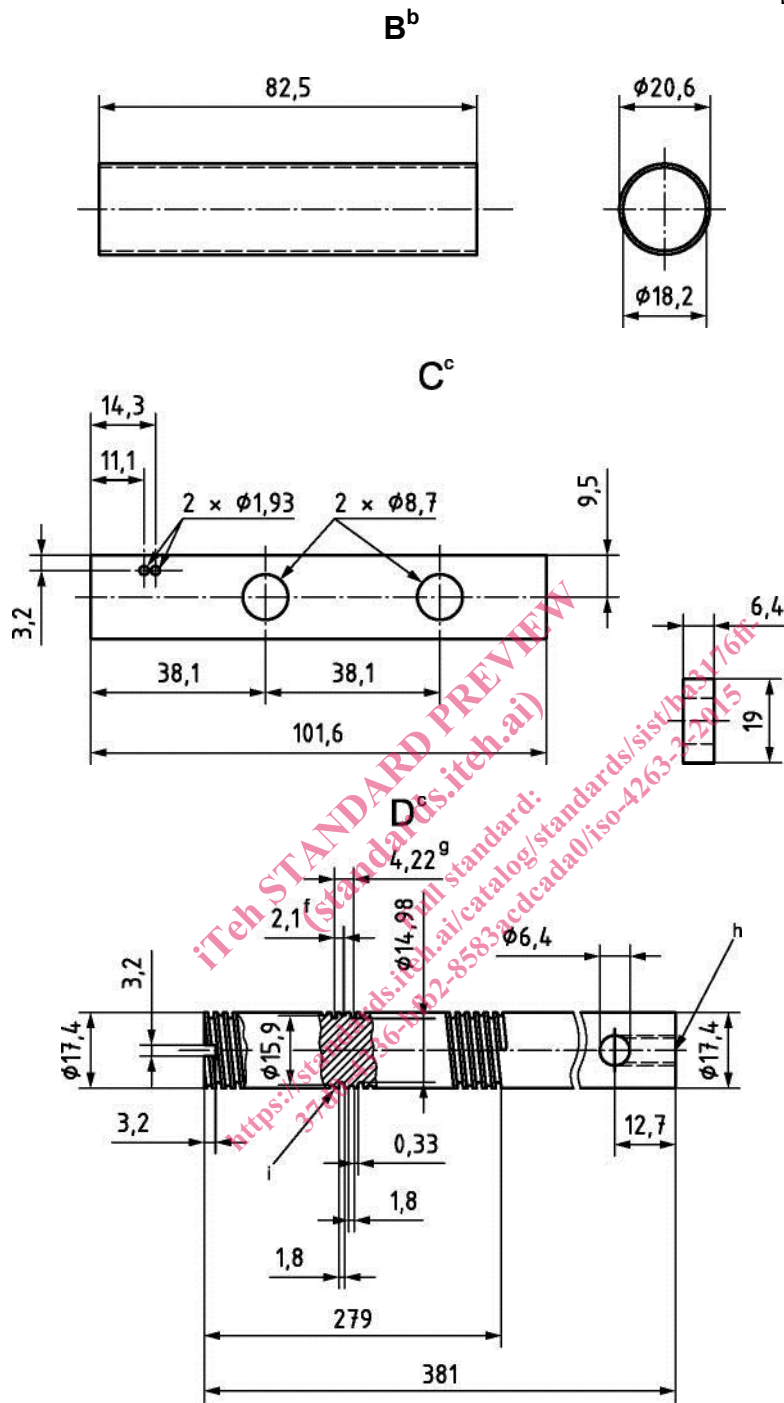


Figure 3 — Catalyst coil mandrel *continued*