
Subland twist drills for holes prior to tapping screw threads

Forets étagés pour avant-trous de taraudage

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 3438:2013

<https://standards.iteh.ai/catalog/standards/iso/07a7c685-396b-4fa8-8fe6-06710be1014f/iso-3438-2013>



Reference number
ISO 3438:2013(E)

© ISO 2013

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 3438:2013

<https://standards.iteh.ai/catalog/standards/iso/07a7c685-396b-4fa8-8fe6-06710be1014f/iso-3438-2013>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Dimensions	1
3.1 General	1
3.2 Subland twist drills with Morse taper shank	1
3.3 Subland twist drill with cylindrical shank	2
Annex A (informative) Relationship between the symbols of this International Standard and the ISO 13399 series	4
Bibliography	5

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 3438:2013](https://standards.itih.ai/catalog/standards/iso/07a7c685-396b-4fa8-8fe6-06710be1014f/iso-3438-2013)

<https://standards.itih.ai/catalog/standards/iso/07a7c685-396b-4fa8-8fe6-06710be1014f/iso-3438-2013>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3438 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 2, *High speed steel cutting tools and their attachments*.

This third edition cancels and replaces the second edition (ISO 3438:2003), of which it constitutes a minor revision with the following changes:

- merging of ISO 3438:2003 and ISO 3439:2003 into a single standard;
- adding of an informative annex giving the relationship between the symbols of this document and the symbols according to the ISO 13399 series.

ISO 3438:2013

<https://standards.iteh.ai/catalog/standards/iso/07a7c685-396b-4fa8-8fe6-06710be1014f/iso-3438-2013>

Subland twist drills for holes prior to tapping screw threads

1 Scope

This International Standard specifies the dimensions of subland twist drills with Morse taper shanks and cylindrical shanks for holes prior to tapping screw threads.

The drills are designed to produce holes prior to tapping metric threads (coarse pitch series) over a selected range of:

- M8 to M30 for subland twist drills with Morse taper shanks;
- M3 to M14 for subland twist drills with cylindrical shanks.

This International Standard complements ISO 2306.

The relationship between the symbols of this International Standard and those according to the ISO 13399 series is given for information in [Annex A](#).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 296, *Machine tools — Self-holding tapers for tool shanks*

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 10899:1996, *High-speed steel two-flute twist drills — Technical specifications*


3 Dimensions

3.1 General

All dimensions and tolerances are given in millimetres. Tolerances not specified shall be of tolerance class “c” in accordance with ISO 2768-1.

3.2 Subland twist drills with Morse taper shank

The dimensions for subland twist drills with Morse taper shanks shall be in accordance with the dimensions shown in Figure 1 and given in Table 1.

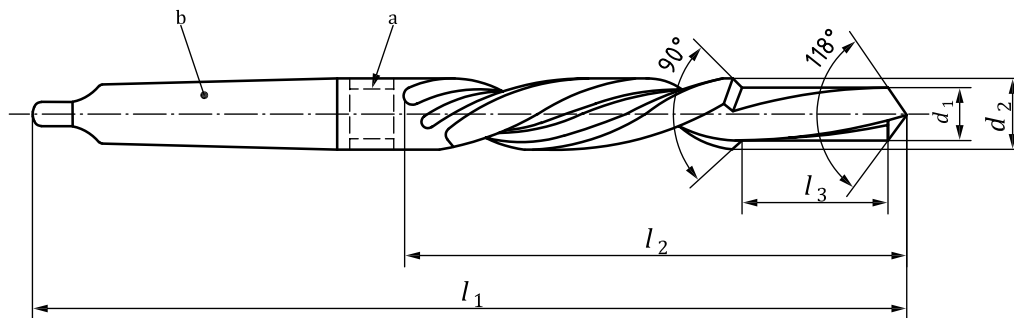

- a Optional recess.
 b Morse taper in accordance with ISO 296, but with a cone tolerance as defined in ISO 10899:1996, 5.3, and [Annex A](#).


Figure 1 — Subland twist drill with Morse taper shank

Table 1 — Dimensions of subland twist drill with Morse taper shank prior to tapping metric screw threads

d_1 h8	d_2 h8	l_1	l_2	l_3	Morse taper No.	Thread
6,8	9	162	81	21	1	M8 × 1,25
8,5	11	175	94	25,5		M10 × 1,5
10,2	13,5	189	108	30		M12 × 1,75
12	15,5	218	120	34,5	2	M14 × 2
14	17,5	228	130	38,5		M16 × 2
15,5	20	238	140	43,5		M18 × 2,5
17,5	22	248	150	47,5		M20 × 2,5
19,5	24	281	160	51,5	3	M22 × 2,5
21	26	286	165	56,5		M24 × 3
24	30	296	175	62,5		M27 × 3
26,5	33	334	185	70	4	M30 × 3,5

3.3 Subland twist drill with cylindrical shank

The dimensions for subland twist drills with cylindrical shanks shall be in accordance with the dimensions shown in Figure 2 and given in Table 2.

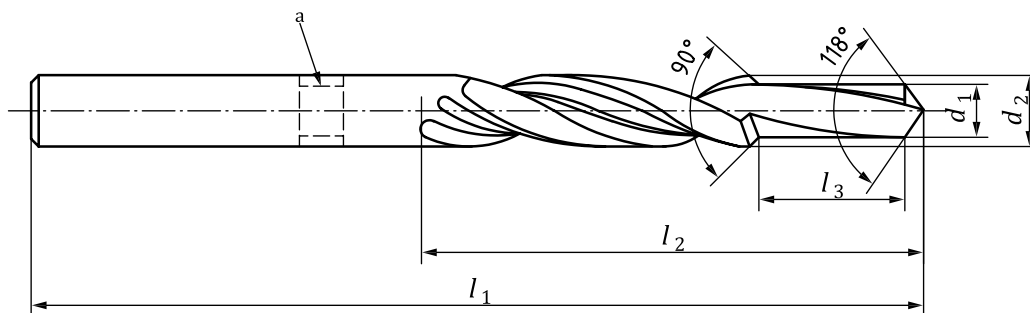

- a Optional recess.

Figure 2 — Subland twist drill with cylindrical shank