



**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);
LTE;
Presence service;
Stage 1
(3GPP TS 22.141 version 16.0.0 Release 16)**



Reference

RTS/TSGS-0122141vg00

Keywords

GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	4
Introduction	4
1 Scope	6
2 References	6
2.1 Acknowledgement.....	6
3 Definitions, symbols and abbreviations	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Presence models	8
4a A brief introduction to the Presence Service	8
4.1 Informative models.....	10
4.2 Roles in the presence service.....	10
4.3 Presence information	12
5 High level requirements	13
5.1 Home Environment requirements.....	13
5.3 General requirements	13
5.4 Management requirements	15
5.5 Notification and acknowledgement requirements.....	17
6 Privacy.....	17
6.1 General privacy requirements.....	17
6.2 Access rules.....	17
7 Security.....	18
8 Charging.....	18
9 Administration.....	18
9.1 Provision	18
9.2 Withdrawal	19
9.3 Registration	19
9.4 Erasure.....	19
9.5 Activation	19
9.6 Deactivation	19
9.7 Invocation.....	20
Annex A (informative): Example presence service use cases.....	21
Annex B (informative): Change history	24
History	26

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

This specification defines the requirements for the support of the presence service. The presence service results in presence information of a user and information on a user's devices, services and services components being managed by the network. Together, user, these devices, services and services components are termed presentity (presence entity). This TS makes extensive use of internet terminology to ensure alignment with the presence service description and behaviour in internet recommendations.

The presence service provides access to presence information to be made available to other users or services. Exploitation of this service, see figure 1, will enable the creation of enhanced rich multimedia services along the lines of those currently present in the internet world.

Presence is an attribute related to, but quite different from mobility information, and is a service that can be exploited to create additional services. The types of services that could be supported by the presence service may include:

- New communications services

The presence service will enable new multimedia services to exploit this key enabler to support other advanced multimedia services and communications. These new services may infer the context, availability and willingness of a user to accept or participate in particular types of communications by accessing the presence information for the user's devices and services. Examples of such new multimedia services that could potentially exploit the presence service include "chat", instant messaging, multimedia messaging, e-mail, , handling of individual media in a multimedia session etc.

- Information services

The presence service may also be exploited to enable the creation of services in which abstract entities are providing the services to the mobile community. The presence service may be used to support such abstract services as cinema ticket information, the score at a football match, motorway traffic status, advanced push services etc.

- Enhanced existing services

Existing services may also be significantly enhanced by exploiting the presence information. For example a user may dynamically arrange for his wireless services to be supported through his corporate PABX whilst he is on-site, require media to be converted and directed to specific devices (e.g. user cannot accept a voice call whilst in a meeting, but is prepared to receive the voice call converted to text in the form of an SMS/MMS/e-mail message). The presence service may also be used to enable the creation of advanced versions of CS/PS services, enable terminal capabilities support etc.

The following figure 1 represents a logical overview of how services could exploit the presence service to create advanced services.

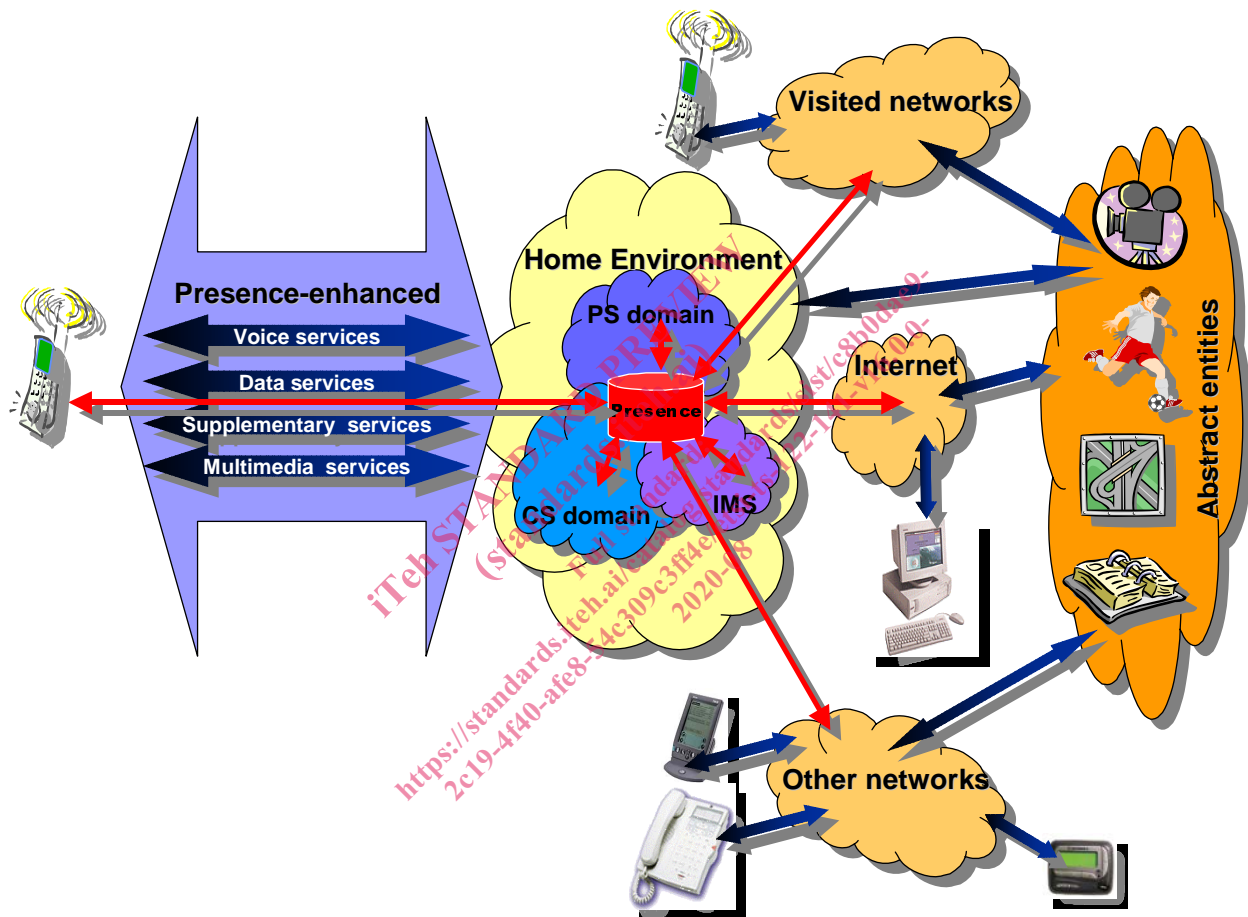


Figure 1: Logical presence service support of services

A presence-enabled service as observed by the user is a service in which the user can control the dissemination of his presence information to other users and services, and also be able to explicitly identify specifically which other users and services to which he provides presence status. Combined with the capability of other users' control of their own presence status, virtually infinite combinations of users and services interacting at different levels can be created.

The exploitation of the presence service is already available in the internet world, although unfortunately with different non interoperable mechanisms. This specification identifies the requirements for support of an enhanced version of the presence service through the support of attributes (e.g. services, media components of a multimedia service, location information) in an interoperable manner within both wireless and fixed networks, and with external networks.

1 Scope

This TS defines the stage one description for the presence service. Stage one is the set of requirements which shall be supported to enable the exploitation of the presence service, seen primarily from the users' and home environments' points of view.

This TS includes information applicable to the home environment, device and network manufacturers which are sufficient to provide complete support of the presence service.

Additional functionalities not documented in this TS are considered outside the scope of this TS. Such additional functionality may be on a network-wide basis, nation-wide basis or particular to a group of users. Such additional functionality shall not compromise conformance to the requirements of the presence service defined in this specification.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Vocabulary for 3GPP Specifications".
- [2] Void
- [3] RFC 2778: "A Model for Presence and Instant Messaging"; <http://www.ietf.org/rfc.html>.
- [4] RFC 2779 "Instant Messaging / Presence Protocol Requirement"; <http://www.ietf.org/rfc.html>.
- [5] RFC 3863 "Presence Information Data Format (PIDF)";
[C:\DOCUME~1\Michele\LOCALS~1\Documents and Settings\Michele\Local Settings\Temp\ZipTemp\ http:\www.ietf.org\internet-drafts\draft-ietf-imp-pim-05.txt](http://www.ietf.org/internet-drafts/draft-ietf-imp-pim-05.txt)
[C:\DOCUME~1\Michele\LOCALS~1\Documents and Settings\Michele\Local Settings\Temp\ZipTemp\ http:\www.ietf.org\internet-drafts\draft-ietf-imp-pim-05.txt](http://www.ietf.org/internet-drafts/draft-ietf-imp-pim-05.txt)
[C:\DOCUME~1\Michele\LOCALS~1\Documents and Settings\Michele\Local Settings\Temp\ZipTemp\ http:\www.ietf.org\internet-drafts\draft-ietf-imp-pim-05.txt](http://www.ietf.org/internet-drafts/draft-ietf-imp-pim-05.txt)
<http://www.ietf.org/rfc.html>.

2.1 Acknowledgement

This document contains extracts of documents, the copyright of which is vested in the Internet Society. The terms of the Internet Society copyright are fulfilled by the reproduction of the copyright and paragraph below. This copyright only applies to text in this document that has been directly reproduced from the appropriate RFC.

Copyright (C) The Internet Society (2000). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for

copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

3 Definitions, symbols and abbreviations

3.1 Definitions

Access rules: constraints on how the presence service makes presence information available to watchers. For each presentity's presence information, the applicable access rules are managed by the principal that controls the presentity.

availability: a property of a presentity denoting its ability and willingness to communicate based on factors such as the identity or properties of the watcher and the preferences and/or policies that are associated with the presentity

fetcher: a form of watcher that has asked the presence service for the presence information of one or more presentities, but is not requesting a notification from the presence service of (future) changes in a presentity's presence information.

identifier: a means of indicating a point of contact, intended for public use such as on a business card. Telephone numbers, email addresses, and typical home page URLs are all examples of identifier in other systems.

poller: a fetcher that requests presence information on a regular basis.

presence information: is a set of attributes characterising current properties of presentities such as status, an optional communication address and other optional attributes etc

presence service: the capability to support management of presence information between watchers and presentities, in order to enable applications and services to make use of presence information

presentity (presence entity): any uniquely identifiable entity that is capable of providing presence information to presence service. Examples of presentities are devices, services etc. Any presentity shall have one, and only one, principal associated with it.

principal: human, organisation, program, or collection of humans, organisations and/or programs that chooses to appear to the presence services as a single actor, distinct from all other principals. A principal is associated with one or more presentities and/or watchers. A principal is said to "own" a certain presentity or watcher if such an association exists. Within the context of this specification a subscriber may be a principal to one or more presentities and/or watchers. Examples: A subscriber may be a principal to the terminals (the presentities) he owns. A program, providing a stock exchange information service to customers, may be the principal to the market quotations (the presentities) it monitors.

Note: The case where a presentity is not a subscriber requires to be further considered

subscribed-watcher: a subscribed-watcher is a type of watcher, which requests notification from the presence service of changes in a presentity's presence information, resulting in a watcher-subscription, as they occur in the future.

watcher-subscription: the information kept by the presence service about a subscribed-watcher's request to be notified of changes in the presence information of one or more presentities

Note: This definition represents an entity's request to obtain presence information, and is not related to the term "subscription" in [1]. Within this specification the term watcher-subscription (and its derivatives) purely refers to this relationship.

watcher: any uniquely identifiable entity that requests presence information about a presentity, or watcher information about a watcher, from the presence service. Special types of watcher are fetcher, poller, and subscribed-watcher. Any watcher shall have one, and only one, principal associated with it.

watcher information: information about watchers that have received or may receive presence information about a particular presentity within a particular recent span of time.

3.2 Abbreviations

For the purposes of this document the following abbreviations apply:

IETF	Internet Engineering Task Force
LAN	Local Area Network
VHE	Virtual Home Environment

4 Presence models

4a A brief introduction to the Presence Service

This clause attempts to give a simplistic high level informative overview of what presence is from a user’s perspective, and how it is used to published to, and accessed by, other users.

Mark’s ability and willingness to be reached for communication is defined by a set of information known as presence information. Mark’s presence information may be related to his mobile network connection status, however it represents much more than just whether he has network coverage or not. Mark also defines a set of access rules to control access to his presence information. For the presence service, Mark is represented by a presentity (presence entity) associated with Mark’s presence information and set of access rules.. In this example, Mark’s presence information consists of user status and location information.

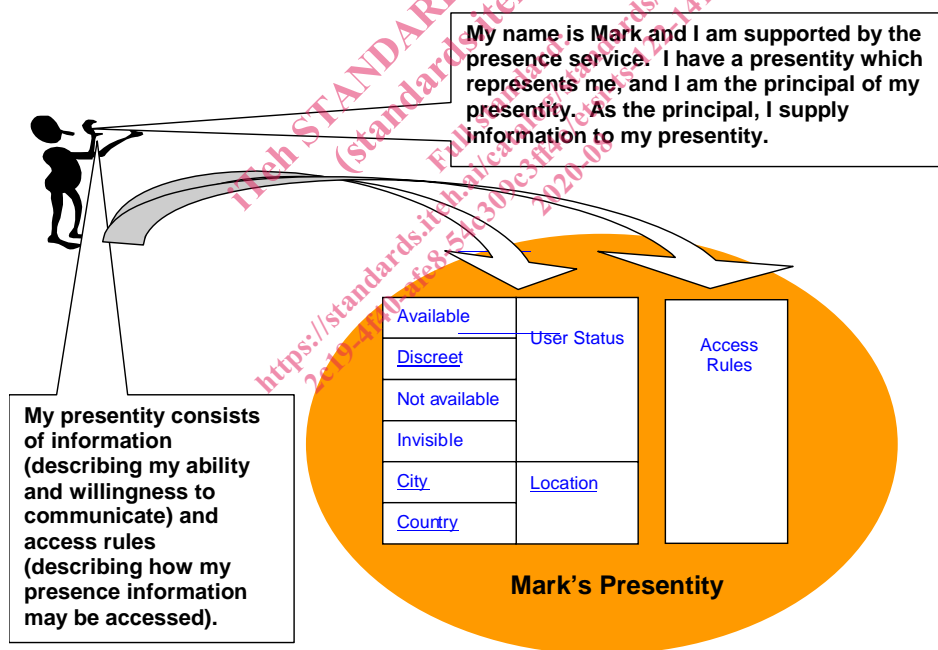


Figure 1: Principal and his representation in the presence information as a presentity

As well as representing a user such as Mark, a presentity may even be created to represent an abstract service or application (e.g. to provide road traffic information, sports results, news headlines etc.). The entity represented by the Presentity (in this case Mark) controls the supply of information for the presentity and is known as the principal; thus Mark is principal of his presentity (see Figure 1).

Paggy, Paul and Jude (e.g. Mark’s callers or instant messaging buddies) who want to determine Mark’s ability (and willingness) to communicate may do so by checking the status information in Mark’s presentity. By doing so, Paggy, Paul and Jude become watchers of Mark (see Figure 2).

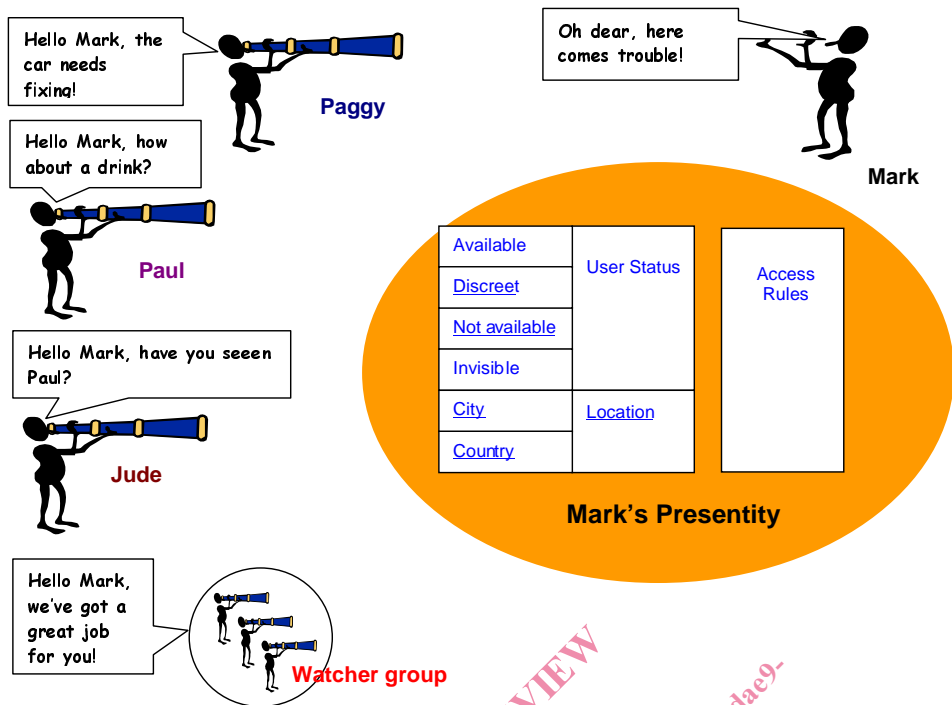


Figure 2: Watchers of Mark

To protect his privacy and confidentiality, Mark has full control over whether Paggy, Paul and Jude, or any other group of watchers, can access his presence information. Mark may give different watchers different levels of access so that, for example Paggy can see all of Mark's of presence information. Paul may only see part of it, and Jude can see none of it. Hence, Mark can control (per watcher) which parts of his presence information may be seen, and he may decide that specific watchers have restricted access, and that some do not have any access at all. Indeed, Mark may also define his presence information and set up his access rules so that some watchers are given different information (e.g. Jude is told that Mark is not available, when in fact he is available), see Figure 3.

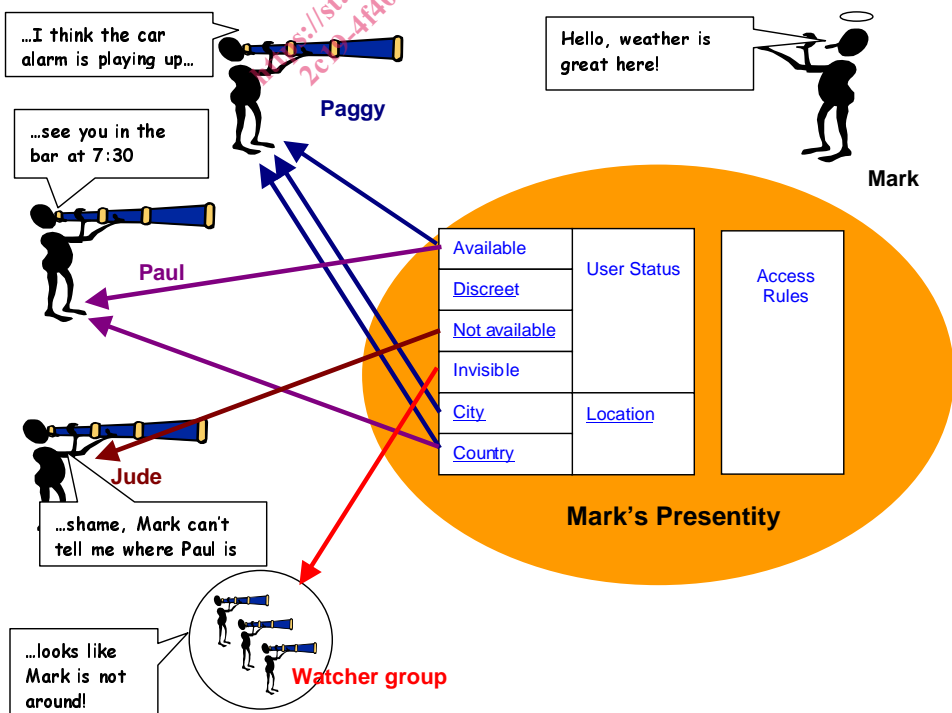


Figure 3: Application of Mark's access rules on watchers