



SLOVENSKI STANDARD
SIST EN 300 175-8 V1.4.2:2005
01-julij-2005

8][]HJbY]nVc`ýUbYVfYnj f j] bYHYY_ca i b]_UWYfB97HE!G_i db]j a Ygb]_fV-L!, " XY. ?cX]fUbY]b`dfYbcg[c j cfU

Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 8:
Speech Coding and Transmission

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 175-8 V1.4.2:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/95d25ccb-87be-4d79-bfdc-c59b6b48cc91/sist-en-300-175-8-v1-4-2-2005>

Ta slovenski standard je istoveten z: **EN 300 175-8 Version 1.4.2**

ICS:

33.070.30 Öð ãæ} ^ Á à[|bzæ} ^ Digital Enhanced Cordless
à| ^: c|çã } ^ Á| ^ [{ ` } ã æ} ^ Telecommunications (DECT)
ÖÖÖVD

SIST EN 300 175-8 V1.4.2:2005 en

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 300 175-8 V1.4.2:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/95d25ccb-87be-4d79-bfdc-c59b6b48cc91/sist-en-300-175-8-v1-4-2-2005>

EN 300 175-8 V1.4.2 (1999-06)

European Standard (Telecommunications series)

Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 8: Speech coding and transmission

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 175-8 V1.4.2:2005

<https://standards.iteh.ai/catalog/standards/sist/95d25ccb-87be-4d79-bfdc-c59b6b48cc91/sist-en-300-175-8-v1-4-2-2005>



Reference

REN/DECT-000129-8 (1me00jdc.PDF)

Keywords

DECT, radio

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

iTeh STANDARD PREVIEW

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C

Association à but non lucratif enregistrée à la
Sous-Prefecture de Grasse (06) N° 7803/88<https://standards.etsi.org/standard/SIST-EN-300-175-8-V1.4.2-2005>

Internetsecretariat@etsi.frIndividual copies of this ETSI deliverable
can be downloaded from<http://www.etsi.org>If you find errors in the present document, send your
comment to: editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
 The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1999.
 All rights reserved.

ETSI

Contents

Intellectual Property Rights	6
Foreword	6
1 Scope.....	7
2 References	8
3 Definitions and abbreviations.....	9
3.1 Definitions	9
3.2 Abbreviations.....	10
4 Configurations	11
4.1 Reference configuration.....	11
4.1.1 Basic configuration	11
4.1.2 Portable Part (PP).....	12
4.1.2.1 Functional organization	12
4.1.2.2 Volume control.....	12
4.1.3 Fixed Part (FP).....	13
4.1.3.1 Digital interface	13
4.1.3.2 Analogue interface.....	14
4.1.3.3 FP adaptive volume control	14
4.2 Test configurations	14
5 Encoding	14
5.1 32 kbit/s full term (ADPCM)	14
5.1.1 Algorithm	14
5.1.2 Bit sequence	15
5.2 Other codings.....	15
https://standards.iteh.ai/catalog/standards/sist/95d25ccb-87be-4d79-bfdc-c59b6048cc91/sist-en-300-175-8-v1-4-2-2005	
6 Transmission aspects	15
6.1 Relative level	15
6.2 Acoustic reference level.....	15
6.3 Volume control	15
7 Speech performance characteristics	15
7.1 PP frequency responses	15
7.1.1 Sending.....	15
7.1.2 Receiving	16
7.2 PP sending and receiving loudness ratings	16
7.2.1 Nominal values.....	16
7.2.2 User-controlled volume control in PP	16
7.2.3 PP adaptive volume control.....	17
7.2.4 FP adaptive volume control.....	17
7.3 Sidetone	18
7.3.1 Talker sidetone	18
7.3.2 Listener sidetone	18
7.4 Terminal coupling loss.....	18
7.4.1 Weighted Terminal Coupling Loss (TLCw).....	18
7.4.1.1 PP for the 3,1 kHz service (PSTN or ISDN)	18
7.4.1.2 FP with 4-wire interface	18
7.4.1.3 FP with analogue 2-wire interface	19
7.4.1.4 PP for unrestricted 64 kbit/s service	19
7.4.2 Stability loss.....	19
7.4.2.1 Requirement	19
7.4.2.2 Test conditions	20
7.4.2.3 Fixed geometry PP.....	20
7.4.2.4 Variable geometry PP	20
7.5 Distortion	20

7.5.1	Sending.....	20
7.5.2	Receiving	20
7.5.3	Sidetone.....	20
7.5.4	Recommended value for network planning	20
7.6	Out of band signals	20
7.6.1	Sending (discrimination against out of band input signals).....	20
7.6.2	Receiving (spurious out of band signals)	21
7.7	Noise.....	21
7.7.1	Sending.....	21
7.7.2	Narrow-band noise	21
7.7.3	Receiving	21
7.7.4	Level of sampling frequency (receiving).....	21
7.8	Acoustic shock.....	21
7.8.1	Continuous signal.....	21
7.8.2	Peak signal	21
7.9	Delay.....	22
7.9.1	DECT network	22
7.9.2	PP	22
7.9.3	FP	22
7.10	Network echo control.....	22
7.11	PP ambient noise rejection.....	23
7.12	Additional requirements for DECT systems provided with a 2-wire PSTN interface.....	23
7.12.1	General	23
7.12.1.1	Polarity independence.....	23
7.12.1.2	Feed Conditions.....	23
7.12.1.3	Power supply.....	23
7.12.2	Speech performance characteristics.....	23
7.12.2.1	Sensitivity/frequency response	24
7.12.2.2	Sending and Receiving Loudness Ratings (SLR and RLR)	24
7.12.2.3	Distortion.....	24
7.12.2.4	Noise.....	24
7.12.2.5	Echo Return Loss.....	24
8	Additional features	24
8.1	Loudspeaking and hand-free facilities	24
8.2	Tandem with mobile radio network	24
8.2.1	Tandem with GSM	25
8.2.1.1	Network echo control	25
8.2.1.2	Terminal coupling loss	25
8.2.1.3	The GSM mobile transmitter operates in continuous mode.....	25
8.2.1.4	The GSM mobile transmitter operates in discontinuous mode, DTX	25
8.3	DECT connected to the GSM fixed network	25
8.3.1	Network echo control.....	26
8.3.2	Terminal coupling loss	26
8.4	Wireless Relay Stations (WRS)	26
8.4.1	Modified FP network echo control requirements for implementation of 2 and 3 CRFP links in cascade	27
Annex A (informative):	Description of "reference" echo control devices.....	28
A.1	Handset echo.....	28
A.1.1	Overview.....	28
A.1.1.1	Connection to the PSTN/ISDN	28
A.1.1.1.1	Local and national calls	28
A.1.1.1.2	Long distance connections with echo control devices in the PSTN/ISDN, e.g. calls via satellites.....	28
A.1.1.2	Connection to the GSM network	29
A.1.2	Implementation of the FP echo control function.....	29
A.1.2.1	Suppression threshold	30
A.1.2.2	Static characteristics of activation control.....	30
A.1.2.3	Dynamic characteristics of activation control	30

A.2 Network echo.....	30
A.2.1 Soft suppressor implementation of requirement 2.....	31
A.2.1.1 Static characteristics.....	32
A.2.1.2 Dynamic characteristics	32
A.2.2 Additional echo control for a 2-wire interface of requirement 1.....	32
A.2.3 Echo canceller used for both requirements 1 and 2	33
Annex B (informative): Local loop application.....	34
B.1 DECT tethered local loop replacement with 2-wire PP end system.....	34
B.1.1 TCLw requirements	34
B.1.2 Network echo.....	35
B.2 Quantization distortion considerations	35
Annex C (informative): GSM Discontinuous Transmission (DTX), and Voice Activity Detection (VAD)	36
Annex D (informative): Speech levels in relation to ambient room noise and examples of adaptive volume control settings	37
Bibliography	38
History.....	39

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 300 175-8 V1.4.2:2005](#)
<https://standards.iteh.ai/catalog/standards/sist/95d25ccb-87be-4d79-bfdc-c59b6b48cc91/sist-en-300-175-8-v1-4-2-2005>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipro>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Project Digital Enhanced Cordless Telecommunications (DECT).

The present document is part 8 of a multi-part EN covering the Common Interface (CI) for the Digital Enhanced Cordless Telecommunications (DECT), as identified below:

Part 1: "Overview";

Part 2: "Physical layer (PHL)";

Part 3: "Medium Access Control (MAC) layer";
**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

Part 4: "Data Link Control (DLC) layer";

Part 5: "Network (NWK) layer"; [SIST EN 300 175-8 V1.4.2:2005](#)

Part 6: "Identities and addressing"; <https://standards.iteh.ai/catalog/standards/sist/95d25ccb-87be-4d79-bfdc-c39b6b48cc91/sist-en-300-175-8-v1-4-2-2005>

Part 7: "Security features";

Part 8: "Speech coding and transmission".

Further details of the DECT system may be found in ETR 015 [18], ETR 043 [19], and ETR 056 [20].

National transposition dates	
Date of adoption of this EN:	28 May 1999
Date of latest announcement of this EN (doa):	31 August 1999
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	29 February 2000
Date of withdrawal of any conflicting National Standard (dow):	29 February 2000

1 Scope

The present document gives an introduction and overview of the complete Digital Enhanced Cordless Telecommunications (DECT) Common Interface (CI).

This part of the DECT CI specifies the speech coding and transmission requirements.

In order to ensure satisfactory interworking of different portable and fixed units, it is necessary to specify the transmission performance of the analogue information over the digital link. This requires not only use of a common speech algorithm, but also standardization of frequency responses, reference speech levels (or loudness) at the air interface and various other parameters.

The present document applies to DECT equipment which includes all the necessary functions to provide real-time two-way speech conversation. A 3,1 kHz telephony teleservice conveyed over a DECT link (including Fixed Part (FP) and Portable Part (PP)) which is capable of being connected (directly or indirectly) to the public network access point has to comply with the requirements in the present document.

Tethered fixed point local loop applications are not required to comply with the requirements of the present document.

The speech performance characteristics defined in the present document typically conform to TBR 8 [13], which specifies the overall performance between the handset acoustic interface and a 64 kbit/s A-law Pulse Code Modulated (PCM) digital network interface. The deviations from TBR 8 [13] are mainly due to the consequences of non-PCM coding and transmission delay.

The additional features described in clause 8 are those which are not included in TBR 8 [13], but which are likely to occur in a DECT system: analogue interface, loudspeaking and hands-free facilities, tandeming with a mobile radio network. Headsets are not covered by the present specifications.

For the DECT systems which connect to the Public Switched Telephone Network (PSTN) via an analogue interface, the additional requirements, which have to be implemented in the FP, have as much as possible been aligned with TBR 38 [17].

SIST EN 300 175-8 V1.4.2:2005

ETSI/STC TM5 has prepared a technical report, ETR 041 [21], to be used as a guide for network planning.

A summary of the control and the use of the DECT echo control functions, to guide on need for options to manufacturers and installers, is found in annex A.

Information concerning test methods can be found in EN 300 176 [3]. The test methods take into account that DECT is a digital system.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".
- [2] EN 300 175-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".
- [3] EN 300 176: "Digital Enhanced Cordless Telecommunications (DECT); Approval test specification; (Part 1: Radio; Part 2: Speech)".
- [4] ITU-T Recommendation G.101 (1996): "The transmission plan".
- [5] ITU-T Recommendation G.131 (1996): "Control of talker echo".
- [6] CCITT Recommendation G.164 (1988): "Echo suppressors".
- [7] ITU-T Recommendation G.165 (1993): "Echo cancellers".
- [8] ITU-T Recommendation ~~G.701 (1993)5-V14.0-2005~~ "Vocabulary of digital transmission and multiplexing, and pulse code modulation (PCM) terms"
<http://stds.iteh.ai/standards/sist/95d25ccb-87be-4d79-bfdc-c59b6b48cc91/sist-en-300-175-8-v1-4-2-2005>
- [9] CCITT Recommendation G.726 (1991): "40, 32, 24, 16 kbit/s adaptive differential pulse code modulation (ADPCM)".
- [10] CCITT Recommendation I.241 (1988): "Teleservices supported by an ISDN".
- [11] ITU-T Recommendation P.10 (1993): "Vocabulary of terms on telephone transmission quality and telephone sets".
- [12] ITU-T Recommendation P.340 (1996): "Transmission characteristics of hands-free telephones".
- [13] TBR 8 (1998): "Integrated Services Digital Network (ISDN); Telephony 3,1 kHz teleservice; Attachment requirements for handset terminals".
- [14] ITU-T Recommendation G.113 (1996): "Transmission impairments".
- [15] ITU-T Recommendation G.111 (1988): "Loudness ratings (LRs) in an international connection".
- [16] ETS 300 540: "Digital cellular telecommunications system (Phase 2); Transmission planning aspects of the speech service in the GSM Public Land Mobile Network (PLMN) system (GSM 03.50)".
- [17] TBR 38 (1998): "Public Switched Telephone Network (PSTN); Attachment requirements for a terminal equipment incorporating an analogue handset function capable of supporting the justified case service when connected to the analogue interface of the PSTN in Europe".
- [18] ETR 015: "Digital Enhanced Cordless Telecommunications (DECT); Reference document".
- [19] ETR 043: "Digital Enhanced Cordless Telecommunications (DECT); Common interface; Services and facilities requirements specification".

- [20] ETR 056: "Digital Enhanced Cordless Telecommunications (DECT); System description document".
- [21] ETR 041: "Transmission and Multiplexing (TM); Digital European Cordless Telecommunication (DECT); Transmission aspects 3,1 kHz telephony; Interworking with other networks".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

Central Control Fixed Part (CCFP): see EN 300 175-1 [1].

Cordless Radio Fixed Part (CRFP): see EN 300 175-1 [1].

DECT Network (DNW): see EN 300 175-1 [1].

double duplex bearer: see EN 300 175-1 [1].

End System (ES): see EN 300 175-1 [1].

fixed geometry Portable Part (PP): PP in which the electro-acoustic transducers and their associated acoustic components are held in fixed relative positions and/or orientations during all on-line conditions and test conditions of the PP.

iTeh STANDARD PREVIEW

Fixed Part (DECT Fixed Part) (FP): see EN 300 175-1 [1].

(standards.iteh.ai)

Fixed radio Termination (FT): see EN 300 175-1 [1].

Generic Access Profile (GAP): standard in addition to the DECT CI2005 that ensures interoperability between FPs and PPs from different manufacturers <https://standards.iteh.ai/catalog/standards/sist/95d25ccb-87be-4d79-bfdc-c59b6b48cc91/sist-en-300-175-8-v1-4-2-2005>

handset echo: echo, perceptible by the far-end user, resulting from the coupling between the receiving and sending directions of the handset, mostly due to acoustic coupling between transducers. It is particularly objectionable in communications including a satellite and an echo canceller, as the DECT handset echo may be out of range of the echo canceller.

network (telecommunication network): see EN 300 175-1 [1].

network echo: echo, perceptible by the DECT user, resulting from reflections in the network. It is mostly due to hybrid impairments at both ends of the communication.

operator (DECT operator): see EN 300 175-1 [1].

Portable Handset (PHS): see EN 300 175-1 [1].

Portable Part (DECT Portable Part) (PP): see EN 300 175-1 [1].

Portable radio Termination (PT): see EN 300 175-1 [1].

public: see EN 300 175-1 [1].

public access service: see EN 300 175-1 [1].

Radio Fixed Part (RFP): see EN 300 175-1 [1].

Repeater Part (REP): see EN 300 175-1 [1].

service provider (telecommunications service provider): see EN 300 175-1 [1].

telephony service: see CCITT Recommendation I.241 [10].

user (of a telecommunication network): see EN 300 175-1 [1].

variable geometry PP: PP that allows the position and/or orientation of its electro-acoustic transducers and their associated acoustic components to be changed during all on-line conditions of the PP.

Wireless Relay Station (WRS): see EN 300 175-1 [1].

3.2 Abbreviations

For the purposes of the present document, relevant definitions and abbreviations in ITU-T Recommendation P.10 [11] and ITU-T Recommendation G.701 [8] apply:


ADPCM	Adaptive Differential Pulse Code Modulation
CCFP	Central Control Fixed Part
CI	Common Interface
CFRP	Cordless Radio Fixed Part
CLRR	Circuit Loudness Rating, Receiving
CLRS	Circuit Loudness Rating, Sending
CRFP	Cordless Radio Fixed Part
dBm	dB relative to 1 milliwatt
dBm0	The absolute power level in decibels referred to a point of zero relative level
dBr	The relative power level in decibels
DECT	Digital Enhanced Cordless Telecommunications
DNW	DECT Network
ERP	Ear Reference Point
ES	End System
FP	Fixed Part
FT	Fixed radio Termination ⁷
GAP	Generic Access Profile
ISDN	Integrated Services Digital Network
LLe	Local Echo Loss SIST EN 300 175-8 V1.4.2:2005
LSTR	Listehe Sidetone Rating /catalog/standards/sist/95d25ccb-87be-4d79-bfdc-48cc91/sist-en-300-175-8-v1-4-2-2005
MRP	Mouth Reference Point
NLP	Non-Linear Processor
NWK	Network
OLR	Overall Loudness Rating
P(A)BX	Private (Automatic) Branch Exchange
PAP	Public Access Profile
PCM	Pulse Code Modulated
PHS	Portable Handset
PP	Portable Part
PSPDN	Packet Switched Public Data Network
PSTN	Public Switched Telephone Network
PT	Portable radio Termination
PTN	Private Telecommunication Network
ReFP	Reference Fixed Part
RePP	Reference Portable Part
REP	REpeater Part
RFP	Radio Fixed Part
RLRH	Receiving Loudness Rating of the Handset
SLRH	Sending Loudness Rating of the Handset
TCLw	weighted Terminal Coupling Loss
TEL R	Talker's Echo Loudness Rating
STMR	Sidetone Masking Rating
QDU	Quantization Distortion Unit
WRS	Wireless Relay Station

4 Configurations

4.1 Reference configuration

4.1.1 Basic configuration

The basic reference configuration for voice transmission over DECT is shown in figure 1.

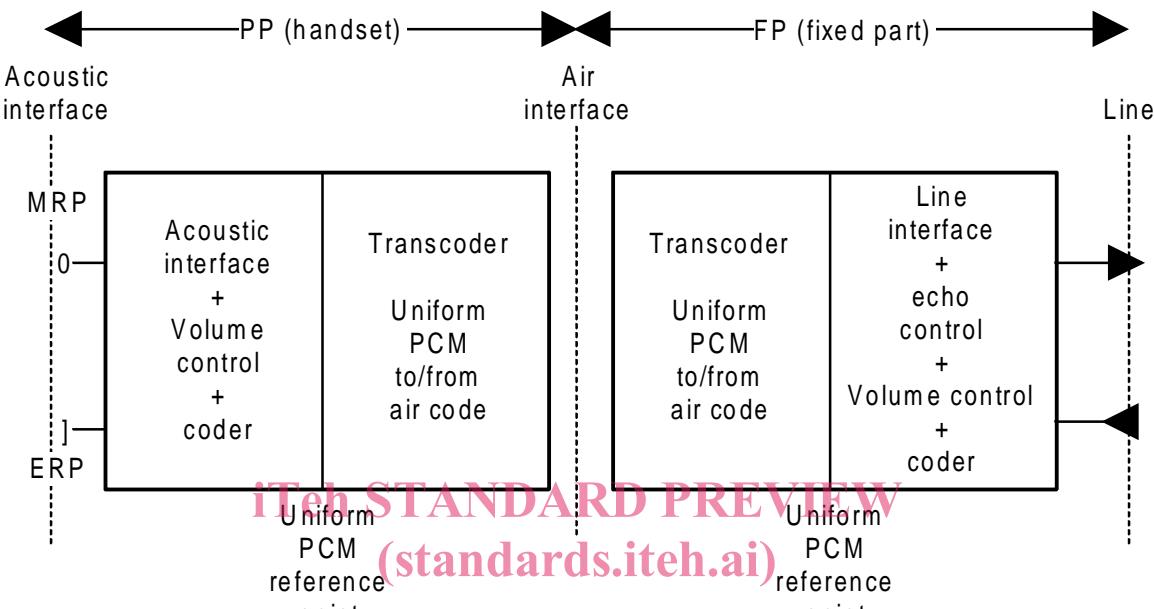

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST EN 300 175-8 V1.4.2-2005

<https://standards.iteh.ai/1/c01/341/1/i1/05321-1-8714d79-bfdc-c59b6b48cc91/sist-en-300-175-8-v1-4-2-2005>

The PP and the FP are delimited by physical interfaces:

- Acoustic: from the PP towards the speaker-listener, with the Ear and Mouth Reference Points (ERP and MRP).
- Air(RF): the interface between PP and FP.
- Line: the interface from the FP towards the network.

Uniform PCM reference points shall be introduced in both the PP and the FP to materialize the limits of the transmission segment which is affected by the air interface coding scheme. This allows the transmission requirements to be specified independently from the coding at the air interface. The various transcoding algorithms are level-transparent, i.e. with an encoder and decoder connected in tandem, the "levels" of the digital signals at the uniform PCM input of the encoder and output from the decoder are identical. In a particular implementation, the reference points may be embedded within an IC, and thus will not be physically accessible.

Each of the three sections thus delimited deals with distinct functions:

- a) the PP electro-acoustic section (between acoustic interface and PP uniform PCM reference point) which includes the acoustic interface, the volume control and the analogue to digital conversion;
- b) the air-code section (between PP and FP uniform PCM reference points) considers the transcoding between uniform PCM and the air-code, as well as the transmission over the air interface;
- c) the FP line interface section (between FP uniform PCM reference point and line interface) comprises the interface to the line, digital or analogue, and the FP voice processing, e.g. echo control.

Typically, the transmission features shall conform to TBR 8 [13] for the PP electro-acoustic section, and the line interface section in the case of digital interface. In the case of analogue interface, the line interface section realizes in the FP the adaptation to subclause 7.12 and to the relevant attachment requirements.