

SLOVENSKI STANDARD
oSIST prEN 13765:2017
01-januar-2017

Plastomerne večslojne (nevulkanizirane) cevi in cevni priključki za pretok ogljikovodikov, topil in kemikalij - Specifikacija

Thermoplastic multi-layer (non-vulcanized) hoses and hose assemblies for the transfer of hydrocarbons, solvents and chemicals - Specification

Thermoplastische, mehrlagige (nicht vulkanisierte) Schläuche und Schlauchleitungen für die Förderung von Kohlenwasserstoffen, Lösungsmitteln und Chemikalien - Spezifikation

Tuyaux et flexibles thermoplastique multicouches (non vulcanisés) pour le dépotage d'hydrocarbures, solvants et produits chimiques - Spécification

Ta slovenski standard je istoveten z: prEN 13765

ICS:

83.140.40	Gumene cevi	Hoses
-----------	-------------	-------

oSIST prEN 13765:2017

en,fr,de

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 13765

November 2016

ICS 23.040.70

Will supersede EN 13765:2010+A1:2015

English Version

**Thermoplastic multi-layer (non-vulcanized) hoses and
hose assemblies for the transfer of hydrocarbons, solvents
and chemicals - Specification**

Tuyaux et flexibles thermoplastique multicouches (non
vulcanisés) pour le dépotage d'hydrocarbures, solvants
et produits chimiques - Spécification

Thermoplastische, mehrlagige (nicht vulkanisierte)
Schläuche und Schlauchleitungen für die Förderung
von Kohlenwasserstoffen, Lösungsmitteln und
Chemikalien - Spezifikation

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 218.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents	Page
European foreword.....	4
1 Scope.....	5
2 Normative references.....	5
3 Terms and definitions	6
4 Classification.....	6
5 Materials and construction.....	6
5.1 General.....	6
5.2 Internal and external wire.....	7
6 Dimensions.....	7
6.1 Internal diameters, with tolerances and minimum bend radii.....	7
6.2 Tolerance on length.....	8
7 Performance requirements of hoses and hose assemblies.....	8
7.1 Cover	8
7.2 Hoses.....	8
7.3 End fittings.....	9
7.4 Hose assemblies.....	9
7.5 Electrical continuity	10
8 Test frequency.....	10
9 Type tests	11
10 Marking.....	11
10.1 Hose marking.....	11
10.2 Hose assembly marking.....	11
Annex A (informative) Resistance to chemical(s) conveyed	12
Annex B (normative) Carbon steel wire.....	13
B.1 Manufacture	13
B.1.1 Steel rod.....	13
B.1.2 Steel composition	13
B.1.3 Wire.....	13
B.2 Condition of finished wire.....	13
B.3 Properties	14
B.3.1 Tensile strength.....	14
B.3.2 Ductility wrap.....	14
Annex C (normative) Galvanized zinc coating	15
C.1 Adhesion of coating	15
C.2 Minimum mass of coating	15
Annex D (normative) Method of test for crush recovery	16

Annex E (normative) Method of test for fuel resistance	18
Annex F (normative) Method of test for thermal ageing	19
Annex G (normative) Method of test for flammability	20
Annex H (normative) Sequence of hydrostatic tests	22
Annex I (normative) Method of test for fitting security	23
Annex J (normative) Method of test for leak tightness	24
Annex K (normative) Type and routine tests for hoses and hose assemblies	25
Annex L (informative) Batch tests for hoses and hose assemblies	26

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 13765:2018

<https://standards.iteh.ai/catalog/standards/sist/01b4ef19-d787-4898-bb76-71fe9a38fffe/sist-en-13765-2018>

European foreword

This document (prEN 13765:2016) has been prepared by Technical Committee CEN/TC 218 “Rubber and plastic hoses and hose assemblies”, the secretariat of which is held by BSI.

This document is currently submitted to the CEN Enquiry.

This document will supersede EN 13765:2010+A1:2015.

Annexes B, C, D, E, F, G, H, I, J and K are normative. Annexes A and L are informative.

WARNING — Persons using this European Standard should be familiar with normal laboratory practice. This standard does not purport to address all the safety problems, if any, associated with its use. It is the responsibility of the user to establish appropriate health and safety practices and to ensure compliance with any national regulatory conditions.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 13765:2018

<https://standards.iteh.ai/catalog/standards/sist/01b4ef19-d787-4898-bb76-71fe9a38ffe/sist-en-13765-2018>

1 Scope

This European Standard specifies requirements for four types of thermoplastic multi-layer (non-vulcanized) hoses and hose assemblies for carrying hydrocarbons, solvents and chemicals. It specifies bore sizes from 25 mm to 300 mm, working pressures from 4 bar¹⁾ to 14 bar and working temperatures from –30 °C to 150 °C.

Type 1 hoses are suitable for vapour applications. Types 2 to 4 hoses are suitable for liquid applications.

NOTE 1 The attention of users is drawn to Annex A concerning the selection of the material for the inner wall of layers and any polymeric coating of the internal wire helix related to the chemical(s) to be conveyed by the hoses and/or hose assemblies.

The manufacturer should be consulted where a polymeric coated internal wire is being considered for use with low conductivity hydrocarbons or chemicals.

This European Standard does not apply to hoses and hose assemblies for:

Aircraft ground fuelling and defuelling	(EN ISO 1825);
Fuel dispensing	(EN 1360);
Oil burners	(EN ISO 6806);
Liquefied petroleum gas and liquefied natural gas	(EN 13766);
Fire fighting	(EN ISO 14775);
Offshore liquefied natural gas	(EN 1474-2);
Refrigeration circuits	

2 Normative references

SIST EN 13765:2018

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 590, *Automotive fuels - Diesel - Requirements and test methods*

EN 10088-3:2014, *Stainless steels - Part 3: Technical delivery conditions for semi-finished products, bars, rods, wire, sections and bright products of corrosion resisting steels for general purposes*

EN ISO 1043-1:2011, *Plastics - Symbols and abbreviated terms - Part 1: Basic polymers and their special characteristics (ISO 1043-1:2011)*

EN ISO 1402:2009, *Rubber and plastics hoses and hose assemblies - Hydrostatic testing (ISO 1402:2009)*

EN ISO 2411, *Rubber- or plastics-coated fabrics - Determination of coating adhesion (ISO 2411)*

EN ISO 4671, *Rubber and plastics hoses and hose assemblies - Methods of measurement of the dimensions of hoses and the lengths of hose assemblies (ISO 4671)*

EN ISO 7233:2008, *Rubber and plastics hoses and hose assemblies - Determination of resistance to vacuum (ISO 7233:2006)*

1) 1 bar = 0,1 MPa.

prEN 13765:2016 (E)

EN ISO 7326, *Rubber and plastics hoses - Assessment of ozone resistance under static conditions (ISO 7326)*

EN ISO 8031:2009, *Rubber and plastics hoses and hose assemblies - Determination of electrical resistance and conductivity (ISO 8031:2009)*

EN ISO 8330:2014, *Rubber and plastics hoses and hose assemblies - Vocabulary (ISO 8330:2014)*

EN ISO 10619-1, *Rubber and plastics hoses and tubing - Measurement of flexibility and stiffness - Part 1: Bending tests at ambient temperature (ISO 10619-1)*

EN ISO 10619-2, *Rubber and plastics hoses and tubing - Measurement of flexibility and stiffness - Part 2: Bending tests at sub-ambient temperatures (ISO 10619-2)*

ISO 209, *Aluminium and aluminium alloys — Chemical composition*

ISO 1817:2015, *Rubber, vulcanized or thermoplastic — Determination of the effect of liquids*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN ISO 8330:2014 apply.

4 Classification

Hoses shall be classified according to working pressure and working temperature range as given in Table 1.

Table 1 — Pressure and temperature range

	Type 1	Type 2	Type 3	Type 4
Maximum working pressure (bar)	4	10	14	14
Proof pressure (bar)	6	15	21	21
Minimum burst pressure (bar)	16	40	56	56
Vacuum rating (bar)	0,5	0,9	0,9	0,9
Working temperature range (°C)	– 20 to + 60	– 30 to + 80	– 30 to + 80	– 30 to + 150
NOTE 1 bar = 0,1 MPa.				

Upon agreement with the manufacturer, lower min and/or higher max temperature are allowed depending on the materials used and the compatibility at those temperatures with the fluid conveyed. Other properties and requirements mentioned in the standard still have to be met.

5 Materials and construction

5.1 General

Hoses shall be constructed as shown in Figure 1 and shall consist of the following:


- an internal wire helix (see 5.2);

- a multi-ply wall of layers of films and fabrics made of thermoplastics that in combination give the required properties and provide a complete seal (see also Annex A);
- a cover consisting of a fabric with abrasion resistant polymeric coating;
- an external wire helix (see 5.2).

5.2 Internal and external wire

Wire shall be chosen in accordance with its chemical resistance from one of the following materials:

- stainless steel wire conforming to EN 10088-3:2014, Table 4, numbers 1.4306, 1.4401, 1.4404 or 1.4436;
- carbon steel wire conforming to Annex B and either galvanised in accordance with Annex C or sheathed in a polymeric material of a minimum wall thickness of 0,5 mm, resistant to liquid hydrocarbon or liquid chemicals as agreed between purchaser and manufacturer (see Annex A);
- aluminium wire conforming to ISO 209.

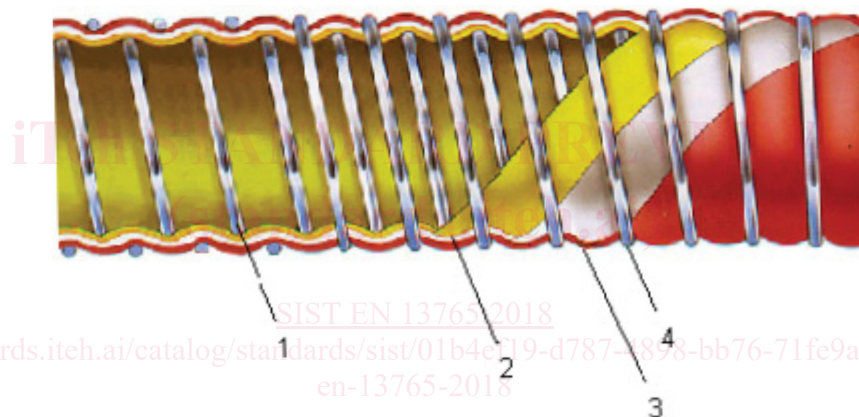

Key

- 1 internal wire
- 2 film
- 3 fabric
- 4 external wire

Figure 1 — Section of a typical thermoplastic multi-layer hose

6 Dimensions

6.1 Internal diameters, with tolerances and minimum bend radii

When measured in accordance with EN ISO 4671, the values of the internal diameters of the hose shall conform to Table 2. When tested by the method described in EN ISO 10619-1 the values of the minimum bend radius shall be as given in Table 2. The hose shall show no sign of permanent deformation of the cross section i.e. kinking.

Table 2 — Dimensions and minimum bend radii

Dimensions in millimetres

Internal diameter	Tolerance	Minimum bend radii			
		Type 1	Type 2	Type 3	Type 4
25	±1	125	125	200	200
32	±1	150	150	200	200
38	±1	150	150	200	200
40	±1	150	150	200	200
50	±1	200	200	225	225
65	±2	200	200	225	225
75	±2	280	280	300	300
80	±2	300	300	350	350
100	±2	400	400	400	400
125	±2	500	500	500	—
150	±2	575	575	575	—
200	±3	800	800	800	—
250	±3	1 000	1 000	1 000	—
300	+ 3	1 200	1 200	1 200	—

6.2 Tolerance on length

When tested in accordance with EN ISO 4671 the tolerance on the measured length of delivered hose assemblies shall be $^{+2}_{-1}$ %.

7 Performance requirements of hoses and hose assemblies

7.1 Cover

When tested in accordance with EN ISO 2411, the adhesion between the fabric used for the outer cover and its abrasion resistant coating shall be no less than 1,5 kN/m.

7.2 Hoses

When tested in accordance with the methods given in Table 3, the physical properties of the hoses shall conform to Table 3.

Table 3 — Physical properties of hoses

Property	Unit	Requirements	Method(s)
Proof pressure	bar	No leakage or other signs of damage at pressure given in Table 1.	EN ISO 1402 with pressure increase not less than 1,7 bar/min
Change in length at proof pressure (max.)	%	10	EN ISO 1402:2009, Clause 8.2 with the initial hose length measured when the hose is pressurized to 0,7 bar for 2 min
Twist at proof pressure (max.)	°/m	10	EN ISO 1402:2009, Clause 8.2 with the initial reading taken when the hose is pressurized to 0,7 bar for 2 min
Burst pressure	bar	≥ Values in Table 1	EN ISO 1402
Bend	—	No leakage or visible damage when the hose is bent to the radius given in Table 2 and subjected to proof pressure.	EN ISO 10619-1
Vacuum	bar	No damage after 30 min when subjected to values in Table 1.	EN ISO 7233:2008, method B
Crush recovery (max.)	%	3	Annex D
Fuel resistance	bar	No leakage at proof pressure	Annex E
Ozone resistance 72 h at 40 °C	—	No cracking observed at x 2 magnification	EN ISO 7326
Thermal ageing	—	No leakage at proof pressure given in Table 1.	Annex F
Flammability	—	See Annex G.	Annex G
Low temperature flexibility	—	Test at minimum temperature given in Table 1	EN ISO 10619-2

7.3 End fittings

End fittings shall be made from materials depending on their chemical resistance to the product conveyed.

For all types of end fittings, the part of the fitting that enters the hose and forms the means by which the fitting is connected to the hose shall be provided with scrolls or protrusions on the surface that correspond to the pitch of the internal helix wire of the hose.

7.4 Hose assemblies

Hose assemblies shall be fitted with end fittings as described in 7.3.