



SLOVENSKI STANDARD
SIST ISO 1537:1997

01-marec-1997

**Naprave za kontinuirni transport sipkih materialov - Koritasti tračni transporterji
(razen prenosnih tračnih transporterjev) - Valjčki**

Continuous mechanical handling equipment for loose bulk materials -- Troughed belt conveyors (other than portable conveyors) -- Idlers

iTeh STANDARD PREVIEW

Engins de manutention continue pour produits en vrac -- Transporteurs à courroie en auge (autres que mobiles) -- Rouleaux de soutien

[SIST ISO 1537:1997](https://standards.iteh.ai/catalog/standards/sist/a988686a-c7ae-457c-b610-b006b0dd949/sist-iso-1537-1997)

Ta slovenski standard je istoveten z: ISO 1537:1975

ICS:

53.040.20 Deli za transporterje Components for conveyors

SIST ISO 1537:1997

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 1537:1997](#)

<https://standards.iteh.ai/catalog/standards/sist/a988686a-c7ae-457c-b610-b060b60dd949/sist-iso-1537-1997>

INTERNATIONAL STANDARD**1537**

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Continuous mechanical handling equipment for loose bulk materials — Troughed belt conveyors (other than portable conveyors) — Idlers

Engins de manutention continue pour produits en vrac — Transporteurs à courroie en auge (autres que mobiles) — Rouleaux de soutien

ITIH STANDARD PREVIEW

(standards.iteh.ai)

First edition — 1975-10-15

[SIST ISO 1537:1997](https://standards.iteh.ai/catalog/standards/sist/a988686a-c7ae-457c-b610-b060b60dd949/sist-iso-1537-1997)

<https://standards.iteh.ai/catalog/standards/sist/a988686a-c7ae-457c-b610-b060b60dd949/sist-iso-1537-1997>

UDC 621.867.2

Ref. No. ISO 1537-1975 (E)

Descriptors : handling equipment, continuous handling, bulk products, conveyors, belt conveyors, idlers, dimensions.

Price based on 5 pages

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

Prior to 1972, the results of the work of the Technical Committees were published as ISO Recommendations; these documents are now in the process of being transformed into International Standards. As part of this process, Technical Committee ISO/TC 101 has reviewed ISO Recommendation R 1537 and found it technically suitable for transformation. International Standard ISO 1537 therefore replaces ISO Recommendation R 1537:1970 to which it is technically identical.

ISO Recommendation R 1537 was approved by the Member Bodies of the following countries :

Belgium	Greece	Spain
Canada	India	Sweden
Colombia	Israel	Switzerland
Czechoslovakia	Italy	Thailand
Egypt, Arab Rep. of	Netherlands	Turkey
Finland	New Zealand	United Kingdom
France	Norway	U.S.A.
Germany	South Africa, Rep. of	U.S.S.R.

The Member Body of the following country expressed disapproval of the Recommendation on technical grounds :

Japan

No Member Body disapproved the transformation of ISO/R 1537 into an International Standard.

Continuous mechanical handling equipment for loose bulk materials – Troughed belt conveyors (other than portable conveyors) – Idlers

1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies the dimensions of idlers and their arrangement and clearances for troughed belt conveyors (other than portable conveyors) with three carrying idlers.

4.1.2 Other materials

The subject of idlers made of other materials will be considered at a later date.

4.2 Dimensions

2 REFERENCE

ISO 64, *Steel tubes – Outside diameters.*

4.2.1 External diameters, d_1 , of carrying idlers and return idlers

3 CLASSIFICATION

Idlers for belts include

- a) carrying idlers in line, of equal length, supporting the carrying belt;
- b) return idlers of two types, supporting the return belt, namely :
 - 1) with one single return idler;
 - 2) with one set of two return idlers of equal length, the axes of which are equally inclined to the horizontal to form a V. The angle of inclination is 10° .

The latter arrangement is applicable to conveyors with belts at least 800 mm wide.

4 SPECIFICATIONS

4.1 Materials

4.1.1 Steel

Where the idlers, carrying and return, are constructed from steel tubes, their diameters shall be extracted from ISO 64 (see table 1).



FIGURE 1 – Idler

TABLE 1 – External diameters, d_1 , of carrying idlers and return idlers

mm	in
63,5	2 1/2
76,1	3
88,9	3 1/2
101,6	4
108	4 1/4
127	5
133	5 1/4
152,4	6
159	6 1/4
168,3	6 5/8
193,7	7 5/8
219,1	8 5/8


ISO 1537-1975 (E)

4.2.2 Lengths

These lengths are applicable to fixed conveyors; other lengths may be necessary for field conveyors.

4.2.2.1 LENGTHS OF CARRYING IDLERS

Table 2 gives the lengths of carrying idlers suitable for troughed belt conveyors using a centre idler and two side idlers in line.

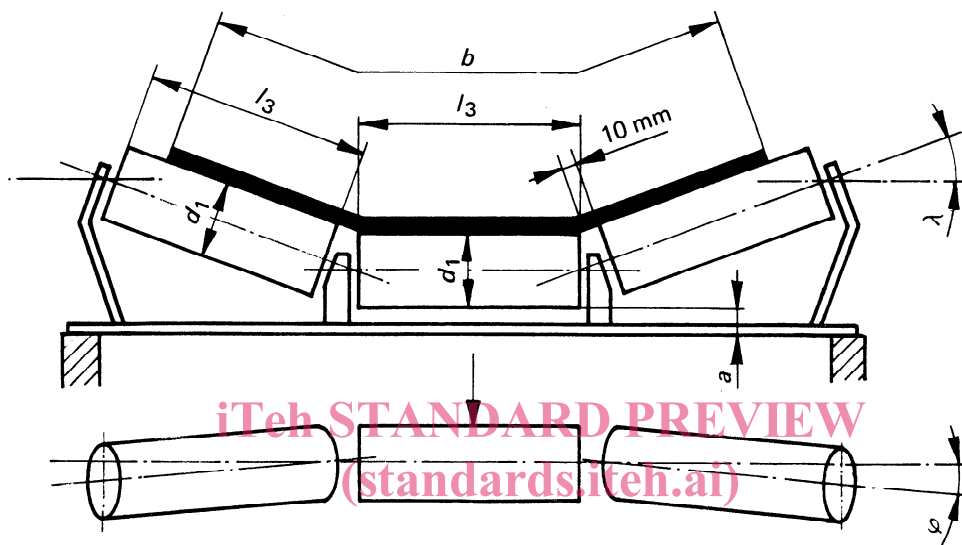

SIST ISO 1537:1997

<https://standards.iteh.ai/catalog/standards/sist/a988686a-c7ae-457c-b610-600660dd947/sist-iso-1537-1997>
 FIGURE 2 – Carrying idlers

TABLE 2 – Lengths of carrying idlers

Belt widths ¹⁾		Carrying idlers	
<i>b</i>		<i>l₃</i>	
mm	in	mm	in
400	16	160	6 1/4
500	20	200	8
650	26	250	10
800	32	315	12 5/8
1 000	40	380	15 1/4
1 200	48	465	18 5/8
1 400	56	530	21 1/4
1 600	64	600	24
1 800	72	670	26 5/8
2 000	80	750	29 1/4

1) See ISO/R 251, *Widths and lengths of conveyor belts*.

4.2.2.2 LENGTHS OF RETURN IDLERS

Table 3 gives the lengths of the return idlers for the two following arrangements :

- one single return idler (see figure 3);
- one set of two return idlers in V form (see figure 4).

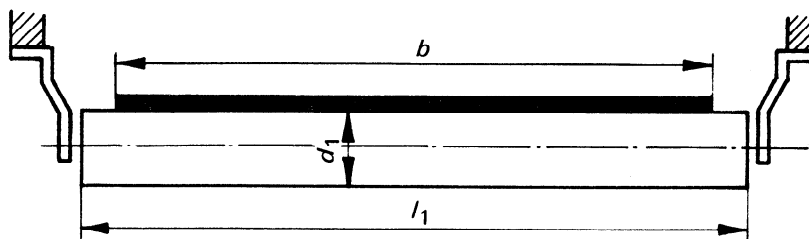


FIGURE 3 – One return idler

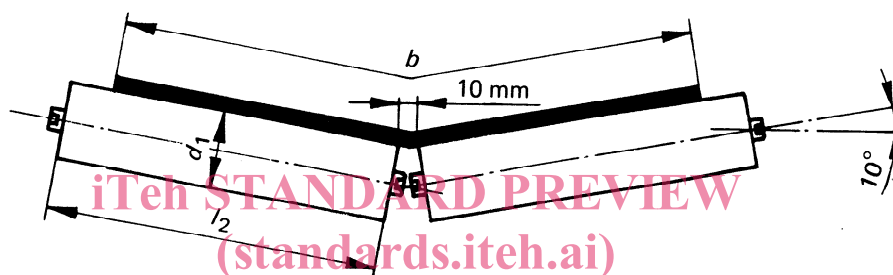


FIGURE 4 – Two return idlers in V form

<https://standards.iteh.ai/catalog/standards/sist/a988686a-c7ae-457c-b610-b060b60dd949/sist-iso-1537-1997>

TABLE 3 – Lengths of return idlers

Belt widths b		Return idlers			
		one idler l_1		two idlers l_2	
mm	in	mm	in	mm	in
400	16	500	20		
500	20	600	24		
650	26	750	30		
800	32	950	38	465	18 5/8
1 000	40	1 150	46	600	24
1 200	48	1 400	56	700 (670) ¹⁾	28
1 400	56	1 600	64	800 (750) ¹⁾	32
1 600	64	1 800	72	900	36
1 800	72	2 000	80	1 000	40
2 000	80	2 200	88	1 100 (1 150) ¹⁾	44

1) These values are employed for conveyors used in and supplied to COMECON countries.

ISO 1537-1975 (E)

4.2.3 Spindle ends

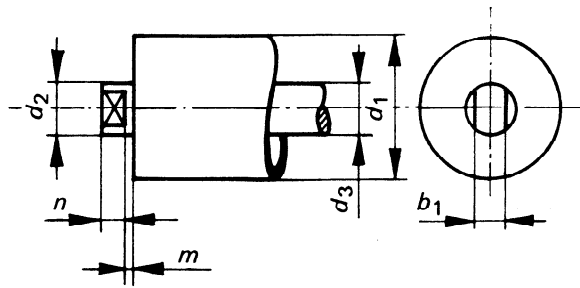


FIGURE 5 – Spindle end without added end cap

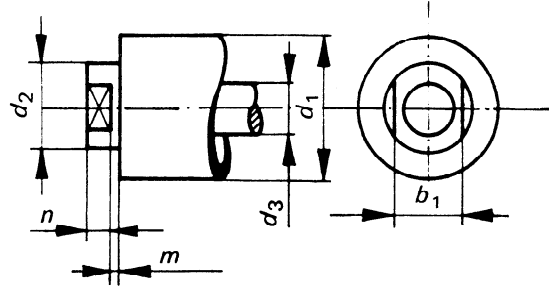


FIGURE 6 – Spindle end with added end cap

The standard dimensions for spindle ends are

- diameter d_2 ;
- diameter d_3 , corresponding to the inner diameter of the bearing;
- partial lengths m and n ;
- width on flats b_1 .

iTeh STANDARD PREVIEW (standards.iteh.ai)

TABLE 4 – Spindle ends – Dimensions in millimetres

	d_2	d_3	b_1	m	n ¹⁾
without added end cap (see figure 5)	20	20	14	4	9
	25	25	18	4	12
	30	30	22	4	12
	40	40	32	4	12
with added end cap (see figure 6)	35	20	30	4	10
	45	25 (30)	38	4	12

TABLE 5 – Spindle ends – Dimensions in inches

	d_2	d_3	b_1	m	n ²⁾
without added end cap (see figure 5)	25/32 or 51/64	25/32 or 51/64	35/64 or 9/16	5/32	11/32 or 23/64
	63/64	63/64	45/64 or 23/32	5/32	15/32 or 31/64
	1 3/16	1 3/16	55/64 or 7/8	5/32	15/32 or 31/64
	1 9/16 or 1 37/64	1 9/16 or 1 37/64	1 11/64	5/32	15/32 or 31/64
with added end cap (see figure 6)	1 3/8	25/32 or 51/64	1 3/16	5/32	25/64
	1 49/64 or 1 25/32	63/64 (1 3/16)	1 31/64 or 1 1/2	5/32	15/32 or 31/64

1) For return idlers, the dimension $n + 10$ mm is allowed.

2) For return idlers, the dimension $n + 25/64$ in is allowed.