



SLOVENSKI STANDARD SIST EN 300 359-4 V1.3.2:2005

01-april-2005

8 [[]HJbc`ca fYy`Y`n`]bhY[f]fUb]a]gfcf]hj Ua]fG8 BL`E`8 cdc`b] bUgfcf]Hj .
Xc_cb Ub`Y`]WUb`UnUgYXYbY[UbUfc b] Uf7 6 GL`E`Dfcfc_c`X][]HJbY`bUfc b]y_Y
g][bU]nUW`Y`yH`%fB GG`L`E` ("XY. `5 VgkfU`hb]dfYg_i yUb]`b]n`f5 HGL`]b`XcXUtbU
]bZ`fa UW`UnUdfYg_i yUb`Y`XY`bY`nj YXVY`dfcfc_c`UfD`L`H`L`E`DfcZ`fa U
gdYVWZ`_UW`UnUi dcfUVb]_U

Integrated Services Digital Network (ISDN); Completion of Calls to Busy Subscriber (CCBS) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 4: Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user

<https://standards.iteh.ai/catalog/standards/sist/22c59c71-ee2d-4adb-8894-e4aa2c428de4/sist-en-300-359-4-v1-3-2-2005>

Ta slovenski standard je istoveten z: EN 300 359-4 Version 1.3.2

ICS:

33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
--------	---	--

SIST EN 300 359-4 V1.3.2:2005 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 359-4 V1.3.2:2005

<https://standards.iteh.ai/catalog/standards/sist/22c59c71-ee2d-4adb-8894-e4aa2c428de4/sist-en-300-359-4-v1-3-2-2005>

ETSI EN 300 359-4 V1.3.2 (2000-06)

European Standard (Telecommunications series)

**Integrated Services Digital Network (ISDN);
Completion of Calls to Busy Subscriber (CCBS)
supplementary service;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 4: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT)
proforma specification for the user**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 300 359-4 V1.3.2:2005](https://standards.iteh.ai/catalog/standards/sist/22c59c71-ee2d-4adb-8894-e4aa2c428de4/sist-en-300-359-4-v1-3-2-2005)

<https://standards.iteh.ai/catalog/standards/sist/22c59c71-ee2d-4adb-8894-e4aa2c428de4/sist-en-300-359-4-v1-3-2-2005>



Reference

REN/SPS-05169-4

KeywordsATS, CCBS, DSS1, ISDN, PIXIT, supplementary
service, user**ETSI**650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88**iTeh STANDARD PREVIEW**
(standards.iteh.ai)SIST EN 300 359-4 V1.3.2:2005<https://standards.iteh.ai/catalog/standards/sist/22c59c71-ee2d-4adb-8894-e4aa2c428de4/sist-en-300-359-4-v1-3-2-2005>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword	5
1 Scope	6
2 References	6
3 Definitions and abbreviations	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Abstract Test Method (ATM)	8
5 Untestable test purposes	8
6 ATS conventions	8
6.1 Declarations part	8
6.1.1 Type definitions	8
6.1.1.1 Simple type definitions	8
6.1.1.2 Structured type definitions	9
6.1.1.2.1 TTCN structured type definitions	9
6.1.1.2.2 ASN.1 structured type definitions	9
6.1.1.3 ASP type definitions	10
6.1.1.3.1 TTCN ASP type definitions	10
6.1.1.3.2 ASN.1 ASP type definitions	10
6.1.1.4 PDU type definitions	10
6.1.1.4.1 TTCN PDU type definitions	10
6.1.1.4.2 ASN.1 PDU type definitions	11
6.1.2 Test suite constants	11
6.1.3 Test suite parameters	11
6.1.4 Variables	11
6.1.4.1 Test suite variables	11
6.1.4.2 Test case variables	11
6.1.5 Test suite operation definitions	11
6.2 Constraints part	12
6.2.1 Structured type constraint declaration	12
6.2.2 ASN.1 type constraint declaration	12
6.2.2.1 Specification of encoding rules	13
6.2.3 ASP type constraint declaration	13
6.2.3.1 ASN.1 ASP type constraint declaration	13
6.2.3.2 TTCN ASP type constraint declaration	14
6.2.4 PDU type constraint declaration	14
6.2.4.1 ASN.1 PDU type constraint declaration	14
6.2.4.2 TTCN PDU type constraint declaration	14
6.2.5 Chaining of constraints	14
6.2.5.1 Static chaining	14
6.2.5.2 Dynamic chaining	14
6.2.6 Derived constraints	14
6.2.7 Parameterized constraints	15
6.2.8 Value assignment	15
6.2.8.1 Specific values	15
6.2.8.2 Matching values	15
6.3 Dynamic part	15
6.3.1 Test cases	15
6.3.2 Test steps	15
6.3.3 Defaults	15

7	ATS to TP map.....	15
8	PCTR conformance.....	16
9	PIXIT conformance.....	16
10	ATS conformance.....	16
Annex A (normative): Protocol Conformance Test Report (PCTR) proforma.....		17
A.1	Identification summary.....	17
A.1.1	Protocol conformance test report.....	17
A.1.2	IUT identification.....	17
A.1.3	Testing environment.....	17
A.1.4	Limits and reservations.....	18
A.1.5	Comments.....	18
A.2	IUT conformance status.....	18
A.3	Static conformance summary.....	18
A.4	Dynamic conformance summary.....	18
A.5	Static conformance review report.....	19
A.6	Test campaign report.....	20
A.7	Observations.....	22
Annex B (normative): Partial PIXIT proforma.....		23
B.1	Identification summary.....	23
B.2	Abstract test suite summary.....	23
B.3	Test laboratory.....	23
B.4	Client (of the test laboratory).....	24
B.5	System Under Test (SUT).....	24
B.6	Protocol information.....	25
B.6.1	Protocol identification.....	25
B.6.2	Parameter values.....	25
B.6.3	Sending of messages by IUT.....	26
B.6.4	Provoking the CCBS interrogation.....	26
B.6.5	Configuration of the IUT.....	26
B.6.6	Configuration of the IUT for connection to a private ISDN.....	27
B.6.7	Support of options.....	27
B.6.8	Timer values.....	27
Annex C (normative): Abstract Test Suite (ATS).....		28
C.1	The TTCN Graphical form (TTCN.GR).....	28
C.2	The TTCN Machine Processable form (TTCN.MP).....	28
Annex D (informative): General structure of ATS.....		29
Annex E (informative): Change record.....		30
E.1	Changes with respect to EN 300 359-4 V1.2.....	30
E.2	Changes with respect to the previous ETS 300 359-4.....	30
	History.....	31

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Services and Protocols for Advanced Networks (SPAN).

The present document is part 4 of a multi-part EN covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Completion of Calls to Busy Subscribers (CCBS) supplementary service, as described below:

- Part 1: "Protocol specification";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";**
- Part 5: "Test Suite Structure and Test Purposes (TSS&TP) specification for the network";
- Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network".

National transposition dates

Date of adoption of this EN:	19 May 2000
Date of latest announcement of this EN (doa):	31 August 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	28 February 2001
Date of withdrawal of any conflicting National Standard (dow):	28 February 2001

1 Scope

The present document specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma for the User side of the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [11]) of implementations conforming to the stage three standard for the Completion of Calls to Busy Subscriber (CCBS) supplementary service for the pan-European Integrated Services Digital Network (ISDN) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol, EN 300 359-1 [2].

EN 300 359-3 [4] specifies the Test Suite Structure and Test Purposes (TSS&TP) related to this ATS and partial PIXIT proforma specification. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the Network side of the T reference point or coincident S and T reference point of implementations conforming to EN 300 359-1 [2].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- IT'S STANDARD PREVIEW
(standards.iteh.ai)
- [1] ETSI EN 300 403-1: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".
<https://standards.iteh.ai/catalog/standards/sist/22c59c71-ee2d-4adb-8894-941a1721c412/etsi-en-300-403-1>
- [2] ETSI EN 300 359-1 (V1.2): "Integrated Services Digital Network (ISDN); Completion of Calls to Busy Subscriber (CCBS) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [3] ETSI EN 300 359-2 (V1.2): "Integrated Services Digital Network (ISDN); Completion of Calls to Busy Subscriber (CCBS) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [4] ETSI EN 300 359-3 (V1.2): "Integrated Services Digital Network (ISDN); Completion of Calls to Busy Subscriber (CCBS) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 3: Test Suite Structure and Test Purposes (TSS&TP) specification for the user".
- [5] ETSI EN 300 196-1: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [6] ISO/IEC 9646-1 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 1: General concepts".
- [7] ISO/IEC 9646-2 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 2: Abstract Test Suite specification".
- [8] ISO/IEC 9646-3 (1998): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 3: The Tree and Tabular Combined Notation (TTCN)".
- [9] ISO/IEC 9646-4 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 4: Test realization".

- [10] ISO/IEC 9646-5 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 5: Requirements on test laboratories and clients for the conformance assessment process".
- [11] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configuration".
- [12] CCITT Recommendation X.209 (1988): "Specification of basic encoding rules for Abstract Syntax Notation One (ASN.1)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

Abstract Test Suite (ATS): see ISO/IEC 9646-1 [6].

Implementation Under Test (IUT): see ISO/IEC 9646-1 [6].

Lower Tester (LT): see ISO/IEC 9646-1 [6].

Point of Control and Observation (PCO): see ISO/IEC 9646-1 [6].

Protocol Conformance Test Report (PCTR): see ISO/IEC 9646-1 [6].

Protocol Implementation Conformance Statement (PICS): see ISO/IEC 9646-1 [6].

PICS proforma: see ISO/IEC 9646-1 [6].

Protocol Implementation eXtra Information for Testing (PIXIT): see ISO/IEC 9646-1 [6].

PIXIT proforma: see ISO/IEC 9646-1 [6].

System Under Test (SUT): see ISO/IEC 9646-1 [6].

Upper Tester (UT): see ISO/IEC 9646-1 [6].

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASP	Abstract Service Primitive
ATM	Abstract Test Method
ATS	Abstract Test Suite
BER	Basic Encoding Rules
CCBS	Completion of Calls to Busy Subscriber
ExTS	Executable Test Suite
IUT	Implementation Under Test
LT	Lower Tester
MOT	Means Of Testing
PCO	Point of Control and Observation
PCTR	Protocol Conformance Test Report
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
SUT	System Under Test
TCP	Test Co-ordination Procedures
TP	Test Purpose
TTCN	Tree and Tabular Combined Notation
UT	Upper Tester

4 Abstract Test Method (ATM)

The remote test method is applied for the CCBS user ATS. The Point of Control and Observation (PCO) resides at the service access point between layers 2 and 3. This PCO is named "L" (for Lower). The L PCO is used to control and observe the behaviour of the Implementation Under Test (IUT) and test case verdicts are assigned depending on the behaviour observed at this PCO.

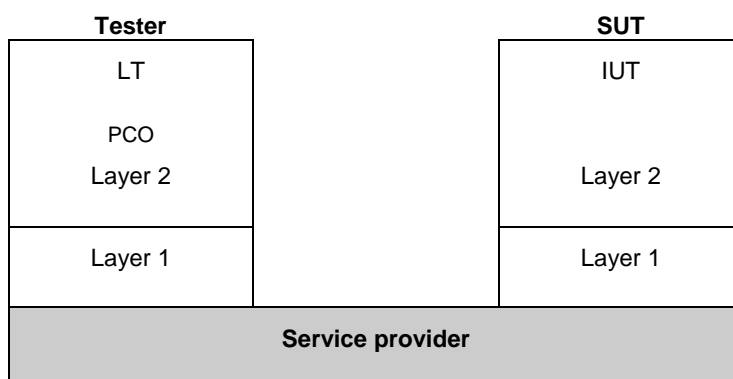


Figure 1: Remote test method

ISO/IEC 9646-2 [7] allows the informal expression of Test Co-ordination Procedures (TCP) between the System Under Test (SUT) upper layer(s) and the Lower Tester (LT). In the ATS contained in annex C, TCP is achieved by use of a second "informal" PCO, called "O" (for Operator). This PCO is used to specify control but not observation above the IUT and consequently, events at this PCO are never used to generate test case verdicts. The use of this O PCO is regarded as a preferred alternative to the use of the implicit send event, in that it allows the ATS to specify in a clear and meaningful way what actions are required to be performed on the IUT.

5 Untestable test purposes

CCBS_U01_013: The described behaviour is not observable at the user network interface.

6 ATS conventions

This clause is structured similarly to the structure of a TTCN ATS. However, the names of the subclauses are arranged in a way more suitable to the present document.

6.1 Declarations part

6.1.1 Type definitions

6.1.1.1 Simple type definitions

Where appropriate, simple types have a length, a value list or a range restriction attached.

Simple types defined as being of some string type (e.g. BIT STRING, OCTET STRING), have a length restriction or a value list attached.

Simple types, defined as being of INTEGER type, have a value list or a range restriction attached.

6.1.1.2 Structured type definitions

6.1.1.2.1 TTCN structured type definitions

All structured type definitions are provided with a full name.

All elements in every structured type definition, defined as being of some string type (e.g. BIT STRING, OCTET STRING), have a length restriction attached.

If an element in a structured type definition is defined as being of a referenced type, the (possible) restriction is defined in that referenced type.

For information elements the identifier, which is unique for each element, has its type defined as a simple type where the value list is restricted to the single value which is the identifier itself. This has the advantage that it allows a test system derived from this ATS to easily identify information elements embedded in messages. An ATS where information element identifiers are represented as unrestricted types can present difficulties for a derived test system in the case where it needs to find one information element embedded in a number of others and the constraints for the other elements have the any-or-omit value. In such a case the test system cannot easily find the beginning of each information element.

6.1.1.2.2 ASN.1 structured type definitions

ASN.1 has been used for three major reasons. First, types defined in ASN.1 can model problems that "pure" TTCN cannot. For instance, data structures modelling ordered or unordered sequences of data are preferably defined in ASN.1. Second, ASN.1 provides a better restriction mechanism for type definitions by using sub-type definitions. Third, it is necessary to use ASN.1 to reproduce the type definitions for remote operation components as specified in the base standards.

The fact that ASN.1 provides a better restriction mechanism for type definitions is used for the purpose of achieving type-compatibility.

Tables 1 and 2 show the typical use of ASN.1. The FIE type in table 1 is written in ASN.1 to permit the use of the SET OF construction in the components field. Constraints of the FIE type can therefore be written using the SUPERSET function which allows to match a single component which may be delivered together with a set of other components. Table 2 shows the reject component type which is defined following the ASN.1 declaration in EN 300 196-1 [5].

Table 1: ASN.1 type definition FIE

ASN.1 Type Definition	
Type Name	: FIE
Comments	: Facility information element taken from EN 300 196; 11.2.2.1. Specified here for both send & receive event.
Type Definition	
SEQUENCE {	
informationElementIdentifier	FIE_I,
length	FIE_LengthType,
extBit	BIT STRING (SIZE (1)),
spareBits	BIT STRING (SIZE (2)),
protocolProfile	BIT STRING (SIZE (5)),
components	SET OF Component }

Table 2: ASN.1 type definition RejectComponent

ASN.1 Type Definition	
Type Name	: RejectComponent
Comments	: Reject Component is not specific to any particular operation. The invokeID may be used to identify a specific operation.
Type Definition	
SEQUENCE {	
invokedID CHOICE {	
invokeID	InvokeIDType,
null	NULL },
problem CHOICE {	
generalProblem	[0] IMPLICIT GeneralProblem,
invokeProblem	[1] IMPLICIT InvokeProblem,
returnResultProblem	[2] IMPLICIT ReturnResultProblem,
returnErrorProblem	[3] IMPLICIT ReturnErrorProblem }

Table 3 shows an example of how ASN.1 can be used to model unordered sequences.

Table 3: ASN.1 type definition FIES

ASN.1 Type Definition	
Type Name :	FIES
Comments :	
Type Definition	
SET OF FIE	

The possibility to use TTCN and ASN.1 in combination is used, i.e. referring to an ASN.1 type from a TTCN type.

6.1.1.3 ASP type definitions

6.1.1.3.1 TTCN ASP type definitions

TTCN ASP type definitions only contain one PDU or no PDU at all. The relationship between an ASP type and a PDU type is one-to-one. That is, there exists one ASP type definition for each PDU type definition (if that ASP type contains a PDU).

All TTCN ASP type definitions are provided with a full identifier.

Some ASPs are not parameterized as shown in the example in table 4. Such ASPs are only used for requesting or receiving service from the lower layer.

Table 4: TTCN ASP type definition DL_REL_IN

TTCN ASP Type Definition		
ASP NAME : DL_REL_IN(DL_RELEASE_INDICATION)		
PCO Type : SAP		
Comments :		
Parameter Name	Parameter Type	Comments
Detailed Comments :		

<https://standards.iteh.ai/catalog/standards/sist/22c59c71-ee2d-4adb-8894-e4a2e1285f41/etsi-en-300-359-4-v1-3-2-2005>

Table 5 shows an example of a parameterized ASP. All ASPs containing PDUs contain only that PDU and no other parameters.

Table 5: TTCN ASP type definition DL_DATA_RQ_ALERT

TTCN ASP Type Definition		
ASP NAME : DL_DATA_RQ_ALERT(DL_DATA_REQUEST)		
PCO Type : SAP		
Comments :		
Parameter Name	Parameter Type	Comments
mun (MessageUnit)	ALERT_PDU	
Detailed Comments :		

6.1.1.3.2 ASN.1 ASP type definitions

There are no ASN.1 ASP type definitions in the ATS.

6.1.1.4 PDU type definitions

6.1.1.4.1 TTCN PDU type definitions

The TTCN PDU type reflects the actual data being transferred or received. All PDUs are embedded in ASPs.

If a specific PDU type definition contains elements defined in terms of a pre-defined type, that element has a restriction attached to it.