

# SLOVENSKI STANDARD kSIST-TS FprCEN/TS 1519-2:2020

01-marec-2020

Cevni sistemi iz polimernih materialov za (nizko- in visokotemperaturne) odvodne sisteme v stavbah - Polietilen (PE) - 2. del: Navodilo za ugotavljanje skladnosti

Plastic piping systems for soil and waste discharge (low and high temperature) within the building structure - Polyethylene (PE) - Part 2: Guidance for the assessment of conformity

Kunststoff-Rohrleitungssysteme zum Ableiten von Abwasser (niedriger und hoher Temperatur) innerhalb der Gebäudestruktur - Polyethylen (PE) - Teil 2: Empfehlungen für die Beurteilung der Konformität

Systèmes de canalisations en plastique pour l'évacuation des eaux-vannes et des eaux usées (à basse et à haute température) à l'intérieur de la structure des bâtiments - Polyéthylène (PE) - Partie 2 : Guide pour l'évaluation de la conformité

Ta slovenski standard je istoveten z: FprCEN/TS 1519-2

ICS:

23.040.01 Deli cevovodov in cevovodi Pipeline components and

na splošno pipelines in general

91.140.80 Drenažni sistemi Drainage systems

kSIST-TS FprCEN/TS 1519-2:2020 en,fr,de

kSIST-TS FprCEN/TS 1519-2:2020

# TECHNICAL SPECIFICATION SPÉCIFICATION TECHNIQUE TECHNISCHE SPEZIFIKATION

# FINAL DRAFT FprCEN/TS 1519-2

January 2020

ICS 91.140.80; 23.040.01

Will supersede CEN/TS 1519-2:2012

#### **English Version**

Plastic piping systems for soil and waste discharge (low and high temperature) within the building structure - Polyethylene (PE) - Part 2: Guidance for the assessment of conformity

Systèmes de canalisations en plastique pour l'évacuation des eaux-vannes et des eaux usées (à basse et à haute température) à l'intérieur de la structure des bâtiments - Polyéthylène (PE) - Partie 2 : Guide pour l'évaluation de la conformité

Kunststoff-Rohrleitungssysteme zum Ableiten von Abwasser (niedriger und hoher Temperatur) innerhalb der Gebäudestruktur - Polyethylen (PE) - Teil 2: Empfehlungen für die Beurteilung der Konformität

This draft Technical Specification is submitted to CEN members for Vote. It has been drawn up by the Technical Committee CEN/TC 155.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

**Warning**: This document is not a Technical Specification. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a Technical Specification.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Cont	tents	Page
Europ	oean foreword	3
Introduction		
1	Scope	6
2	Normative references	6
3	Terms and definitions	6
4	Abbreviated terms	10
5	General	10
6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.3 6.4 6.5 6.6 6.7 6.8	Testing and inspection  Material specification  Grouping  General  Size groups  Fitting groups  Type testing  Batch release tests  Process verification tests  Audit tests  Indirect tests  Test records  X A (informative) Survey of test regime	
Annex A (informative) Survey of test regime		20
Biblio	ographyhatlarise je ke	21

## **European foreword**

This document (FprCEN/TS 1519-2:2020) has been prepared by Technical Committee CEN/TC 155 "Plastics piping systems and ducting systems", the secretariat of which is held by NEN.

This document is currently submitted to the Vote on TS.

This document is based on the Template prepared by CEN/TC155 WG21 Version V.5.

This document will supersede CEN/TS 1519-2:2012.

There are only minor updates in this new edition.

EN 1519 consists of the following parts, under the general title *Plastics piping systems for soil and waste* discharge (low and high temperature) within the building structure — Polyethylene (PE)

- Part 1: *Specifications for pipes, fittings and the system*;
- Part 2: Guidance for the assessment of conformity (the present TS).

em;

.nity (the present TS).

.nity (the present TS).

.it all standard described and stand

#### Introduction

Figures 1 and 2 are intended to provide general information on the concept of testing and organization of those tests used for the purpose of the assessment of conformity. For each type of test, i.e. type testing (TT), batch release test (BRT), process verification test (PVT), and audit test (AT), this document details the applicable characteristics to be assessed as well as the frequency and sampling of testing.

A typical scheme for the assessment of conformity of materials, pipes, fittings, joints or assemblies by manufacturers is given in Figure 1.

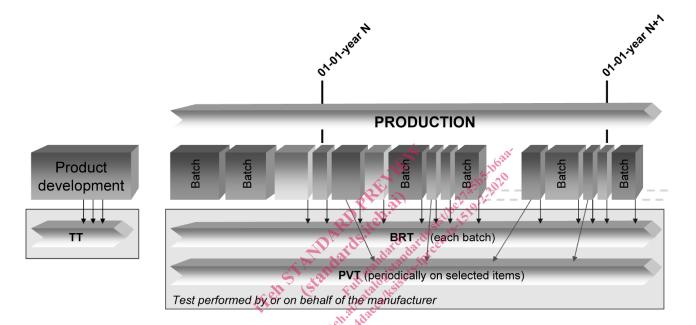


Figure 1 — Typical scheme for the assessment of conformity by a manufacturer

A typical scheme for the assessment of conformity of materials, pipes, fittings, joints or assemblies by manufacturers, including a third-party certification, is given in Figure 2.

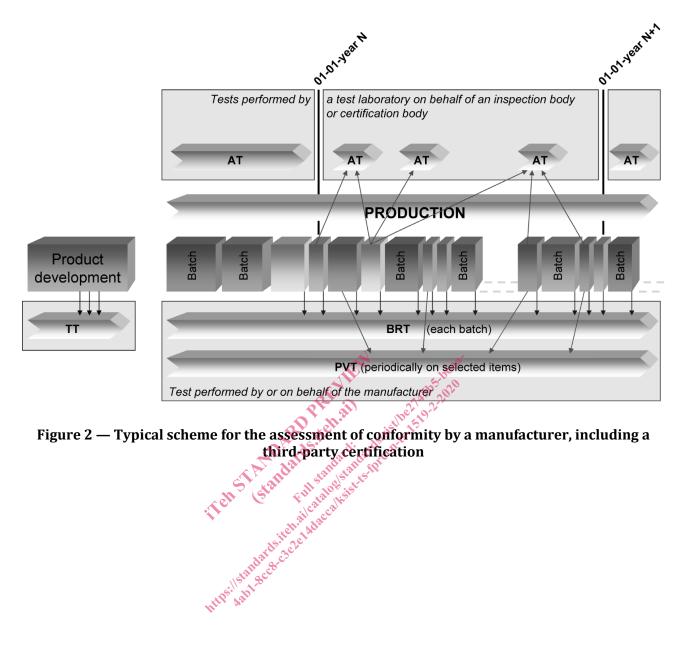


Figure 2 — Typical scheme for the assessment of conformity by a manufacturer, including a third party certification

#### Scope 1

This document gives requirements and guidance for the assessment of conformity of materials, products, joints and assemblies in accordance with EN 1519 intended to be included in the manufacturer's quality plan as part of the quality management system and for the establishment of third-party certification procedures.

The quality management system is expected to conform to or is no less stringent than the relevant requirements to EN ISO 9001 [1].

NOTE 2 If certification is involved, the certification body is expected be accredited to EN ISO/IEC 17065 [2] or EN ISO/IEC 17021 [3], as applicable.

NOTE 3 A basic test matrix providing an overview of the testing scheme is given in Annex A.

In conjunction with EN 1519-1 this document is applicable to piping systems made of polyethylene (PE) intended to be used:

- for soil and waste discharge systems (low and high temperature) inside buildings (application area code "B") and
- for soil and waste discharge systems (low and high temperature) for both inside buildings and buried in ground within the building structure (application area code "BD")

This is reflected in the marking of products by "B" or "BD".

Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1519-1:2019, Plastics piping systems for soil and waste discharge (low and high temperature) within the building structure — Polyethylene (PE) — Part 1: Requirements for pipes, fittings and the system

#### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 1519-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <a href="http://www.electropedia.org/">http://www.electropedia.org/</a>
- ISO Online browsing platform: available at <a href="http://www.iso.org/obp">http://www.iso.org/obp</a>

#### 3.1

#### certification body

impartial body, governmental or non-governmental, possessing the necessary competence and responsibility to carry out certification of conformity according to given rules of procedure and management

Note 1 to entry: A certification body is preferably accredited to EN ISO/IEC 17065 [2].

#### 3.2

#### inspection body

impartial organisation or company, approved by the certification body as possessing the necessary competence to verify and/or to carry out initial type testing, audit testing and inspection of the manufacturer's factory production control in accordance with the relevant standard

Note 1 to entry: A inspection body is preferably accredited to EN ISO/IEC 17020 [4].

#### 3.3

#### testing laboratory

laboratory which measures, tests, calibrates or otherwise determines the characteristics of the performance of materials and products

In the context of this part of EN 1519, the materials and products can be subjected to type testing, batch release testing, process verification testing, audit testing, and witness testing, as applicable.

Note 2 to entry: A testing laboratory is preferably accredited to EN ISO/IEC 17025 [2].

#### 3.4

#### quality management system

part of a management system regard to quality

[SOURCE: EN ISO 9000:2015 [6], definition 3.5.4

Requirements for quality management systems are given in EN ISO 9001 [1]. Note 1 to entry:

3.5 quality plan document setting out the specific quality practices, resources and sequence of activities relevant to a particular product or range of products

#### 3.6

### type testing

#### TT

test performed to prove that the material, product, joint or assembly is capable of conforming to the requirements given in the relevant standard

Note 1 to entry: The type test results remain valid until there is a change in the material or product or assembly provided that the process verification tests are done regularly.

#### 3.7

#### batch release test

#### **BRT**

test performed by or on behalf of the manufacturer on a batch of materials or products, which has to be satisfactorily completed before the batch can be released

#### 3.8

#### process verification test

#### **PVT**

test performed by or on behalf of the manufacturer on materials, products or joints at specific intervals to confirm that the process continues to be capable of producing products which conform to the requirements given in the relevant standard

Note 1 to entry: Such tests are not required to release batches of materials or products and are carried out as a measure of process control.

#### 3.9

#### audit test

#### ΔТ

test performed by a test laboratory on behalf of an inspection body or certification body to confirm that the material, product, joint or assembly continues to conform to the requirements given in the relevant standard and to provide information to assess the effectiveness of the quality management system

#### 3.10

#### indirect test

#### IT

test performed by or on behalf of the manufacturer, different from that specified test for that particular characteristic, having previously verified its correlation with the specified test

#### 3.11

#### witness test

#### WT

test accepted by an inspection or a certification body for type testing and/or audit testing, which is carried out by or on behalf of the manufacturer and supervised by a representative of the inspection or certification body, qualified in testing

#### 3.12

#### material

generic term for compositions compounds grouped by families, expressed by generic names, e.g. polyethylen, stainless steel, brass or EPDM

Note 1 to entry: Definition from European Commission, Directorate-General for Enterprise and Industry, Subgroup on Product Testing Procedures (EC, DG ENT and IND, SG PTP).

#### 3.13

#### compound

clearly defined homogenous mixture of base polymer with additives, i.e. antioxidants, pigments, stabilizers and others, at a dosage level necessary for the processing and the intended use of the final product, including non-virgin material (if applicable)

#### 3.14

#### material batch

clearly identified quantity of a given homogeneous compound manufactured under uniform conditions and defined and identified by the compound/formulation manufacturer

#### 3.15

#### product

pipe or fitting of a clearly identified type intended to be a part of a piping system which the manufacturer puts on the market

#### 3.16

#### product batch

clearly identified collection of products, manufactured consecutively or continuously under the same conditions, using the same material conforming to the same specification

Note 1 to entry: The production batch is defined and identified by the product manufacturer.