

# ETSI GS MEC 030 V3.1.1 (2023-03)



## Multi-access Edge Computing (MEC); V2X Information Services API

(standards.iteh.ai)

[ETSI GS MEC 030 V3.1.1 \(2023-03\)](https://standards.iteh.ai/catalog/standards/sist/bd125b00-5dfc-4d3a-a26e-d45af6886e91/etsi-gs-mec-030-v3-1-1-2023-03)

<https://standards.iteh.ai/catalog/standards/sist/bd125b00-5dfc-4d3a-a26e-d45af6886e91/etsi-gs-mec-030-v3-1-1-2023-03>

### *Disclaimer*

The present document has been produced and approved by the Multi-access Edge Computing (MEC) ETSI Industry Specification Group (ISG) and represents the views of those members who participated in this ISG.  
It does not necessarily represent the views of the entire ETSI membership.

---

**Reference**

---

RGS/MEC-0030v311V2XAPI

---

---

**Keywords**

---

API, MEC, service, V2X

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

---

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://standards-portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

---

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2023.  
All rights reserved.

# Contents

Intellectual Property Rights .....	7
Foreword.....	7
Modal verbs terminology.....	7
1 Scope .....	8
2 References .....	8
2.1 Normative references .....	8
2.2 Informative references.....	9
3 Definition of terms, symbols and abbreviations.....	10
3.1 Terms.....	10
3.2 Symbols.....	10
3.3 Abbreviations .....	10
4 Overview .....	11
5 Description of the service (informative).....	11
5.1 Reference scenarios for the VIS service.....	11
5.2 Multi-operator scenarios and V2X services .....	12
5.3 V2X service continuity in multi-operator operation scenarios .....	12
5.3.1 Introduction.....	12
5.4 VIS functionalities.....	13
5.4.1 Overview .....	13
5.4.2 Communication between V2X Control Function (3GPP) and VIS (MEC) .....	14
5.4.3 Inter-MEC system V2X application communication.....	15
5.4.4 Inter-MEC system service exposure .....	15
5.4.5 The VIS and its role in producing journey-specific predictive QoS notifications .....	15
5.4.6 The VIS and its role in multi-domain end-to-end predictive QoS notifications .....	17
5.4.7 Interaction between the VIS and non-session based V2X services.....	18
5.4.8 The VIS and the provision of information about V2X Message Distribution Servers.....	19
5.5 Sequence diagrams .....	19
5.5.1 Sending a request for provisioning information for V2X communication over Uu unicast .....	19
5.5.2 Sending a request for provisioning information for V2X communication over Uu MBMS.....	20
5.5.3 Sending a request for provisioning information for V2X communication over PC5.....	20
5.5.4 Sending a request for provisioning information for direct communication with V2X Message Distribution Servers .....	21
5.5.5 Sending a request for journey-specific QoS predictions .....	21
5.5.6 REST based subscribe-notify model.....	22
5.5.6.1 Subscribing to event notifications .....	22
5.5.6.2 Receiving notification on expiry of V2X information event subscription .....	23
5.5.6.3 Updating subscription for V2X information event notifications.....	23
5.5.6.4 Unsubscribing from V2X information event notifications.....	24
5.5.7 Receiving V2X information event notifications about the provisioning information changes for V2X communication over Uu unicast .....	24
5.5.8 Receiving V2X information event notifications about the provisioning information changes for V2X communication over Uu MBMS.....	25
5.5.9 Receiving V2X information event notifications about the provisioning information changes for V2X communication over PC5.....	26
5.5.10 V2X message interoperability.....	26
5.5.10.1 V2X message subscribe .....	26
5.5.10.2 V2X message publication .....	27
5.5.10.3 V2X message notification .....	27
5.6 Conclusions on VIS .....	28
6 Data model .....	28
6.1 Introduction .....	28
6.2 Resource data types .....	28
6.2.1 Introduction.....	28

6.2.2	Type: UuUnicastProvisioningInfo .....	28
6.2.3	Type: UuMbmsProvisioningInfo .....	29
6.2.4	Type: Pc5ProvisioningInfo .....	29
6.2.5	Type: V2xMsgDistributionServerInfo .....	29
6.2.6	Type: PredictedQos .....	30
6.2.7	Type: V2xMsgPublication .....	31
6.3	Subscription data types .....	31
6.3.1	Introduction .....	31
6.3.2	Type: ProvChgUuUniSubscription .....	31
6.3.3	Type: ProvChgUuMbmsSubscription .....	32
6.3.4	Type: ProvChgPc5Subscription .....	33
6.3.5	Type: V2xMsgSubscription .....	33
6.3.6	Type: PredQosSubscription .....	34
6.3.7	Type: SubscriptionLinkList .....	34
6.4	Notifications data types .....	35
6.4.1	Introduction .....	35
6.4.2	Type: ProvChgUuUniNotification .....	35
6.4.3	Type: ProvChgUuMbmsNotification .....	35
6.4.4	Type: ProvChgPc5Notification .....	36
6.4.5	Type: V2xMsgNotification .....	36
6.4.6	Type: TestNotification .....	36
6.5	Referenced structured data types .....	37
6.5.1	Introduction .....	37
6.5.2	Type: TimeStamp .....	37
6.5.3	Type: LocationInfo .....	37
6.5.4	Type: Plmn .....	37
6.5.5	Type: Ecgi .....	37
6.5.6	Type: FddInfo .....	38
6.5.7	Type: TddInfo .....	38
6.5.8	Type: V2xApplicationServer .....	38
6.5.9	Type: UuUniNeighbourCellInfo .....	38
6.5.10	Type: V2xServerUsd .....	39
6.5.11	Type: UuMbmsNeighbourCellInfo .....	39
6.5.12	Type: Pc5NeighbourCellInfo .....	39
6.5.13	Type: LinkType .....	39
6.5.14	Type: V2xMsgPropertiesValues .....	40
6.5.15	Type: V2xMsgFilterCriteria .....	40
6.5.16	Type: V2xMsgDistributionServer .....	40
6.5.17	Type: QosPredFilterCriteria .....	41
6.5.18	Type: WebsockNotifConfig .....	41
6.6	Referenced simple data types and enumerations .....	41
6.6.1	Introduction .....	41
6.6.2	Type: CellId .....	42
6.6.3	Type: Earfcn .....	42
6.6.4	Type: TransmissionBandwidth .....	42
7	API definition .....	42
7.1	Introduction .....	42
7.2	Global definitions and resource structure .....	42
7.3	Resource: uu_unicast_provisioning_info .....	44
7.3.1	Description .....	44
7.3.2	Resource definition .....	44
7.3.3	Resource methods .....	45
7.3.3.1	GET .....	45
7.3.3.2	PUT .....	46
7.3.3.3	PATCH .....	46
7.3.3.4	POST .....	46
7.3.3.5	DELETE .....	46
7.4	Resource: uu_mbms_provisioning_info .....	46
7.4.1	Description .....	46
7.4.2	Resource definition .....	46
7.4.3	Resource methods .....	47

7.4.3.1	GET .....	47
7.4.3.2	PUT .....	48
7.4.3.3	PATCH .....	48
7.4.3.4	POST .....	48
7.4.3.5	DELETE .....	48
7.5	Resource: pc5_provisioning_info .....	48
7.5.1	Description .....	48
7.5.2	Resource definition .....	48
7.5.3	Resource methods .....	49
7.5.3.1	GET .....	49
7.5.3.2	PUT .....	50
7.5.3.3	PATCH .....	50
7.5.3.4	POST .....	50
7.5.3.5	DELETE .....	50
7.6	Resource: provide_v2x_msg_distribution_server_info .....	50
7.6.1	Description .....	50
7.6.2	Resource definition .....	50
7.6.3	Resource methods .....	51
7.6.3.1	GET .....	51
7.6.3.2	PUT .....	51
7.6.3.3	PATCH .....	51
7.6.3.4	POST .....	51
7.6.3.5	DELETE .....	52
7.7	Resource: provide_predicted_qos .....	52
7.7.1	Description .....	52
7.7.2	Resource definition .....	52
7.7.3	Resource methods .....	52
7.7.3.1	GET .....	52
7.7.3.2	PUT .....	52
7.7.3.3	PATCH .....	52
7.7.3.4	POST .....	52
7.7.3.5	DELETE .....	53
7.8	Resource: publish_v2x_message .....	53
7.8.1	Description .....	53
7.8.2	Resource definition .....	53
7.8.3	Resource methods .....	54
7.8.3.1	GET .....	54
7.8.3.2	PUT .....	54
7.8.3.3	PATCH .....	54
7.8.3.4	POST .....	54
7.8.3.5	DELETE .....	55
7.9	Resource: subscriptions .....	55
7.9.1	Description .....	55
7.9.2	Resource definition .....	55
7.9.3	Resource methods .....	55
7.9.3.1	GET .....	55
7.9.3.2	PUT .....	56
7.9.3.3	PATCH .....	56
7.9.3.4	POST .....	56
7.9.3.5	DELETE .....	58
7.10	Resource: existing subscription .....	58
7.10.1	Description .....	58
7.10.2	Resource definition .....	58
7.10.3	Resource methods .....	58
7.10.3.1	GET .....	58
7.10.3.2	PUT .....	59
7.10.3.3	PATCH .....	61
7.10.3.4	POST .....	61
7.10.3.5	DELETE .....	61

<b>Annex A (informative):</b>	<b>Mapping of permissions for RESTful API and topic based alternative transport .....</b>	<b>63</b>
-------------------------------	---	-----------

A.1	Overview .....	63
A.2	Mapping of permissions - RESTful and topic based alternative transport.....	63
<b>Annex B (informative):</b>	<b>Complementary material for API utilization .....</b>	<b>65</b>
<b>Annex C (informative):</b>	<b>Radio access network scenario options for V2X communication.....</b>	<b>66</b>
<b>Annex D (informative):</b>	<b>State-of-the-art of using a Message Broker as V2X Message Distribution Server for exchanging non-session based V2X messages .....</b>	<b>67</b>
History .....		68

i T h S T A N D A R D P R E  
( s t a n d a r d s . i t e h )

E T S I G S M E C 0 3 0  
h t t p s : / / s t a n d a r d s . i t e h . a  
d 4 5 a f 6 8 8 6 e 9 1 / e t s i - g

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Foreword

This Group Specification (GS) has been produced by ETSI Industry Specification Group (ISG) Multi-access Edge Computing (MEC).

---

# Modal verbs terminology

In the present document **"shall"**, **"shall not"**, **"should"**, **"should not"**, **"may"**, **"need not"**, **"will"**, **"will not"**, **"can"** and **"cannot"** are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

**"must"** and **"must not"** are **NOT** allowed in ETSI deliverables except when used in direct citation.

# 1 Scope

The present document focuses on a MEC V2X Information Services (VIS), in order to facilitate V2X interoperability in a multi-vendor, multi-network and multi-access environment, considering the relevant work of other industry bodies relating to V2X communication (e.g. ETSI ITS, 5GAA). It describes the V2X-related information flows, required information and operations. The present document also specifies the necessary API with the data model and data format.

## 2 References

### 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] Void.
- [2] Void.
- [3] [IETF RFC 5246](#): "The Transport Layer Security (TLS) Protocol Version 1.2".
- [4] [IETF RFC 6749](#): "The OAuth 2.0 Authorization Framework".
- [5] [IETF RFC 6750](#): "The OAuth 2.0 Authorization Framework: Bearer Token Usage".
- [6] [ETSI TS 102 894-2](#): "Intelligent Transport Systems (ITS); Users and applications requirements; Part 2: Applications and facilities layer common data dictionary".
- [7] [IETF RFC 8446](#): "The Transport Layer Security (TLS) Protocol Version 1.3".
- [8] [ETSI TS 133 210](#): "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; 5G; Network Domain Security (NDS); IP network layer security (3GPP TS 33.210)".
- [9] [ETSI GS MEC 009](#): "Multi-access Edge Computing (MEC); General principles, patterns and common aspects of MEC Service APIs".
- [10] [ETSI TS 123 285](#): "Universal Mobile Telecommunications System (UMTS); LTE; Architecture enhancements for V2X services (3GPP TS 23.285)".
- [11] [ETSI TS 136 300](#): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2 (3GPP TS 36.300)".
- [12] [ETSI TS 136 423](#): "LTE; Evolved Universal Terrestrial Radio Access Network (E-UTRAN); X2 Application Protocol (X2AP) (3GPP TS 36.423)".
- [13] [ETSI TS 136 413](#): "LTE; Evolved Universal Terrestrial Radio Access Network (E-UTRAN); S1 Application Protocol (S1AP) (3GPP TS 36.413)".
- [14] [ETSI TS 136 331](#): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC); Protocol specification (3GPP TS 36.331)".

- [15] [ETSI TS 136 321](#): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Medium Access Control (MAC) protocol specification (3GPP TS 36.321)".

## 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Void.
- [i.2] Void.
- [i.3] [OpenAPI™ Specification](#).
- [i.4] ETSI GR MEC 022: "Multi-access Edge Computing (MEC); Study on MEC Support for V2X Use Cases".
- [i.5] Void.
- [i.6] ETSI TS 129 388: "LTE; V2X Control Function to Home Subscriber Server (HSS) aspects (V4); Stage 3 (3GPP TS 29.388)".
- [i.7] ETSI TS 129 389: "LTE; Inter-V2X Control Function Signalling aspects (V6); Stage 3 (3GPP TS 29.389)".
- [i.8] Void.
- [i.9] Void.
- [i.10] Void.
- [i.11] Void.
- [i.12] Void.
- [i.13] Void.
- [i.14] ETSI GS MEC 003: "Multi-access Edge Computing (MEC); Framework and Reference Architecture".
- [i.15] ETSI GS MEC 012: "Multi-access Edge Computing (MEC); Radio Network Information API".
- [i.16] ETSI GS MEC 013: "Multi-access Edge Computing (MEC); Location API".
- [i.17] ETSI GS MEC 028: "Multi-access Edge Computing (MEC); WLAN Access Information API".
- [i.18] [Autopilot](#).
- [i.19] [MQTT](#): "The Standard for IoT Messaging".
- [i.20] [Fifth Generation Cross-Border Control \(5GCroCo\)](#).
- [i.21] [5G Carmen](#).
- [i.22] [Advanced Message Queuing Protocol](#).
- [i.23] [5G Car-captured data](#).
- [i.24] [C-ROADS - The Platform of Harmonised C-ITS Deployment in Europe](#).

- [i.25] [ICT4cart](#).
- [i.26] [Developers](#).
- [i.27] ETSI TS 123 288: "5G; Architecture enhancements for 5G System (5GS) to support network data analytics services (3GPP TS 23.288)".
- [i.28] ETSI TS 123 502: "5G; Procedures for the 5G System (5GS) (3GPP TS 23.502)".
- [i.29] Void.
- [i.30] [5GAA TR-200055](#): "5G Automotive Association; Working Group System Architecture and Solution Development; 5GS Enhancements for Providing Predictive QoS in C-V2X".
- [i.31] [5GAA White Paper](#): "Making 5G Proactive and Predictive for the Automotive Industry".
- [i.32] ETSI GR MEC 001: "Multi-access Edge Computing (MEC); Terminology".

## 3 Definition of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the terms given in ETSI GR MEC 001 [i.32] apply.

### 3.2 Symbols

Void.

### 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI GR MEC 001 [i.32] and the following apply:

5GAA	5G Automotive Association
5QI	5G QoS Identifier
AMQP	Advanced Message Queuing Protocol
CDF	Cumulative Distribution Function
CN	Core Network
C-V2X	Cellular V2X
DL	Downlink
DN	Data Network
E2E	End-to-End
eNB	evolved Node B
E-UTRAN	Evolved UMTS Terrestrial Radio Access Network
FDD	Frequency Division Duplex
FOTA	Firmware Over The Air
gNB	5G Node B
HSS	Home Subscriber Server
IoT	Internet of Things
ITS	Intelligent Transport Systems
KPI	Key Performance Indicator
MaaS	Mobility-as-a-Service
MBMS	Multimedia Broadcast Multicast Services
MQTT	Message Queuing Telemetry Transport
NEF	Network Exposure Function
NF	Network Function
NWDAF	Network Data Analytics Function
OEM	Original Equipment Manufacturer
PF	Prediction Function
PoP	Point-of-Presence

RSU	Road Side Unit
SLA	Service-Level Agreement
ToD	Teleoperated Driving
SDP	Session Description Protocol
SOTA	Software Over The Air
TDD	Time Division Duplex
UDP	User Datagram Protocol
UL	Uplink
V2N2I	Vehicle-to-Network-to-Infrastructure
V2N2V	Vehicle-to-Network-to-Vehicle
VIS	V2X Information Services

## 4 Overview

The present document specifies the VIS API to facilitate V2X interoperability in a multi-vendor, multi-network and multi-access environment.

Clause 5 presents reference scenarios for the VIS service and lists the functionalities of the service. It also describes the information flows used for VIS.

The information that can be exchanged over the VIS API is described in clause 6 which provides detailed descriptions of all information elements that are used for VIS.

Clause 7 describes the actual VIS API providing detailed information of how information elements are mapped into a RESTful API design.

## 5 Description of the service (informative)

### 5.1 Reference scenarios for the VIS service

According to recommendations in ETSI GR MEC 022 [i.4], multi-access, multi-network and multi-operator scenarios are the reference assumptions motivating the need for MEC normative work on this area. Figure 5.1-1 shows all the scenarios applicable to V2X services. In particular:

- Some V2X services can be managed by OEMs (the so called "Vehicle OEMs scenario"), and, thus, it is reasonable to consider both single and multi-operator scenarios for such services. Note that V2X services are expected to be provided by different network operators in the same country and/or in different countries.
- Similarly, the same applies when the "ITS Operator scenario" is considered, that may additionally provide services for different vehicle OEMs. An ITS operator may need to provide a country-wide V2X service, by exploiting different operators' networks (deploying different MEC systems), and offering this service to vehicles belonging to different OEMs. Note that also in this case, V2X services are expected to be provided by different network operators in the same country and/or in different countries.


Vehicle OEM scenario, single MNO	ITS operator scenario, single MNO	ITS operator scenario, single OEM, single MNO
Vehicle OEM scenario, multiple MNOs	ITS operator scenario, multiple MNOs	ITS operator scenario, multiple OEMs, multiple MNOs

Figure 5.1-1: Reference scenarios relevant to the VIS service

As a consequence, in order to enable all use cases, the MEC V2X Information Services (VIS) should support C-V2X systems implemented in the most general scenarios. In particular, these scenarios should assume the presence of multiple MEC vendors and the need to enable interoperable data exchange between them. Moreover, multi-operator interoperability is a key aspect for ensuring service continuity, and it is described in clause 5.2.

## 5.2 Multi-operator scenarios and V2X services

The left hand side of figure 5.2-1 shows a typical multi-operator scenario, highlighting the case of temporary absence of radio coverage, e.g. in roaming situations. As showed in the right-hand side of figure 5.2-1, in a traditional V2X system (without the VIS service) the interconnection between MNOs is terminated at the remote side, with clear disadvantages in terms of high E2E latency; on the other hand, thanks to the exploitation of the VIS service (enabling also a "horizontal communication" between MEC systems), the interconnection between MNOs can be realized with low E2E latency.

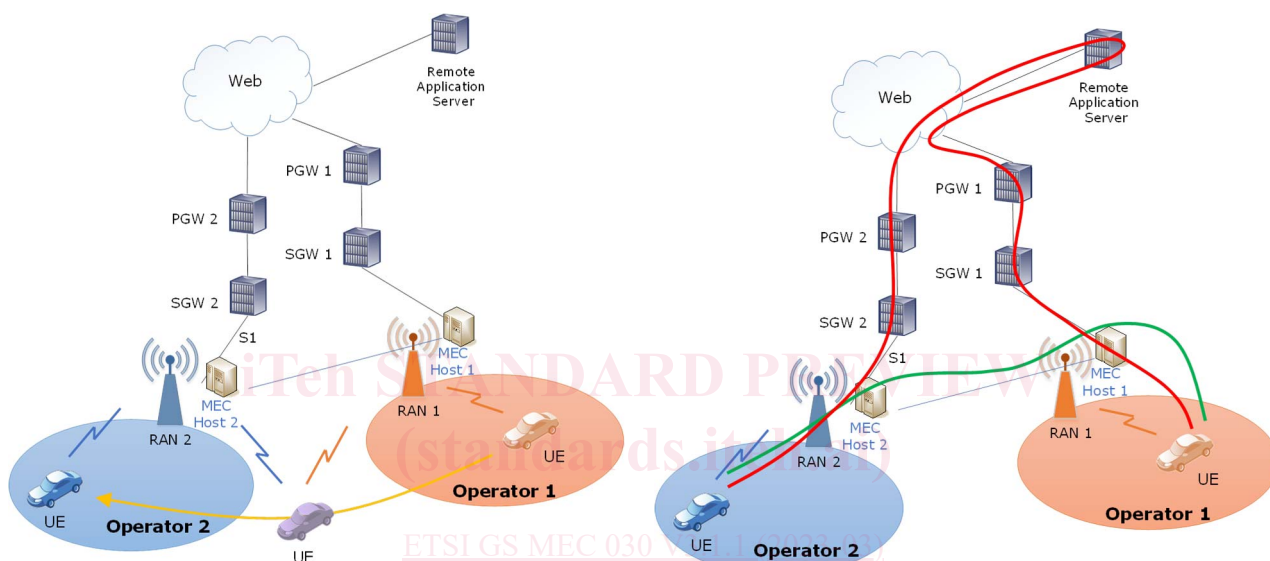

**Figure 5.2-1: (left): Example of a multi-operator scenario for V2X services; (right): Example of path for data exchange without the VIS service (in red) and with the VIS service (in green)**


V2X service needs to be provided across all the territory including both operators' coverage areas, as well as when leaving the coverage area of one operator and entering the coverage area of the other operator without any service disruption and guaranteeing E2E performance. For that purpose, VIS exposes information on PC5 configuration parameters and manages the multi-operator environment, especially when a UE is out of coverage.

## 5.3 V2X service continuity in multi-operator operation scenarios

### 5.3.1 Introduction

Wireless communication is a key enabling technology of co-operative intelligent transportation systems. Road users (including vehicles, cyclists, pedestrians) involved in the communication may use services provided by different operators.

A mobile operator network is typically region specific or country specific, which provides services directly to its own customers (subscribers), while providing communications to other operators' customers via the core network level interworking between two operators' networks. To maintain the V2X service continuity (often with low latency requirement) for road users becomes very challenging especially when such road users (e.g. vehicular UEs) move from one PLMN to another.

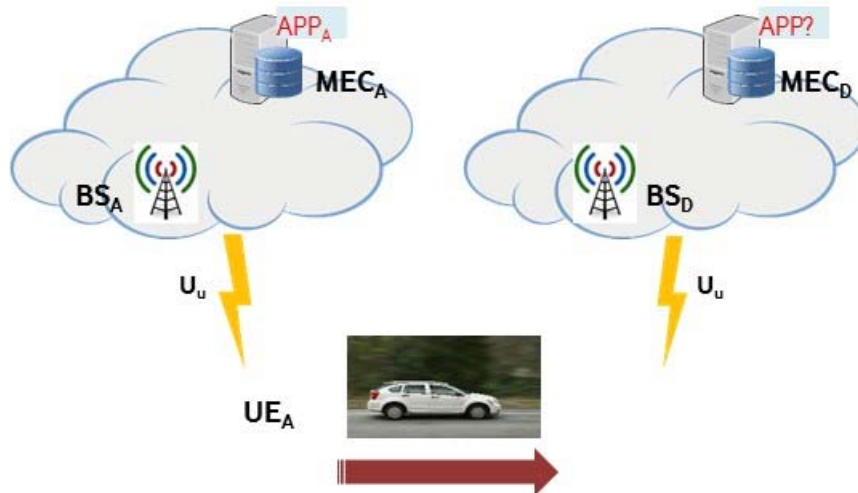

**Figure 5.3.1-1: Example V2X use case: inter-PLMN service continuity**

To enable service continuity in such use cases, mobile network level interworking among different PLMNs is necessary as specified in 3GPP specifications ETSI TS 123 285 [10], ETSI TS 129 388 [i.6] and ETSI TS 129 389 [i.7]. Furthermore, inter-MEC system coordination is also required to prepare in advance the UEs in transit (based on the agreements among operators, roam or handover to a new PLMN) and reduce the interruption time.

The service consumers communicate with VIS over the VIS API to get the necessary V2X service provisioning information for the visiting PLMN in support of inter-PLMN service continuity. Both the MEC applications and the MEC platform may consume the VIS; and both the MEC platform and the MEC applications may be the providers of the V2X information.

The VIS API supports both queries and subscriptions (pub/sub mechanism) that are used over the RESTful API or over alternative transports such as message bus. Alternative transports are not specified in detail in the present document. For RESTful architectural style, the present document defines the HTTP protocol bindings.

ETSI GS MEC 030 V3.1.1 (2023-03)

## 5.4 VIS functionalities

### 5.4.1 Overview

The MEC standards have been designed to facilitate V2X interoperability in a multi-vendor, multi-network and multi-access environment. The introduction of the VIS API is aimed at helping the ecosystem adopt MEC for automotive use cases. These use cases may involve different car makers, OEM suppliers, network infrastructure vendors, MEC vendors, application/content providers and other stakeholders. Therefore, it is critical that all MEC related interoperability reference points involving the potential stakeholders are fully specified.

In particular, the VIS defined in the present document will permit information exposure, pertinent to the support of automotive use cases, to MEC application instances. It will also permit a single ITS operator to offer a V2X service over a region that may span different countries and involve multiple network operators, MEC systems and MEC application providers.

For that purpose, the MEC VIS includes the following functionalities:


- 1) Gathering of PC5 V2X relevant information from the 3GPP network (e.g. the list of authorized UEs, the relevant information about the authorization based on the UE subscription and the relevant PC5 configuration parameters).
- 2) Exposure of this information to MEC apps (also potentially belonging to different MEC systems).
- 3) Enablement of MEC apps to communicate securely with the V2X-related 3GPP core network logical functions (e.g. V2X control function).
- 4) Enablement of MEC apps in different MEC systems to communicate securely with each other.

- 5) Possibly gathering and processing information available in other MEC APIs (e.g. RNI API, see ETSI GS MEC 012 [i.15], Location API, see ETSI GS MEC 013 [i.16], WLAN API, see ETSI GS MEC 028 [i.17], etc.) in order to predict radio network congestion and provide suitable notifications to the UE.

From that perspective, the VIS service is relevant to Mp1 and Mp3 reference points in the MEC architecture. In particular, the relevant information is exposed to MEC apps via the Mp1 reference point. Potential impacts on Mp3 reference point (e.g. enabling the possibility to transfer this information between different MEC platforms) are introduced in ETSI GS MEC 003 [i.14] and are out of the scope of the present document.

NOTE 1: The VIS API provides information to MEC applications in a standardized way; this is essential for interoperability in multi-vendor scenarios; nevertheless, it is acknowledged that MEC applications may communicate in a direct way (i.e. without the use of MEC platform).

NOTE 2: Inter-system communication may be realized between MEOs. As an alternative, or, in addition to that, possible Mp3 enhancements (or new reference points between MEC systems) may be defined. This is out of the scope of the present document.

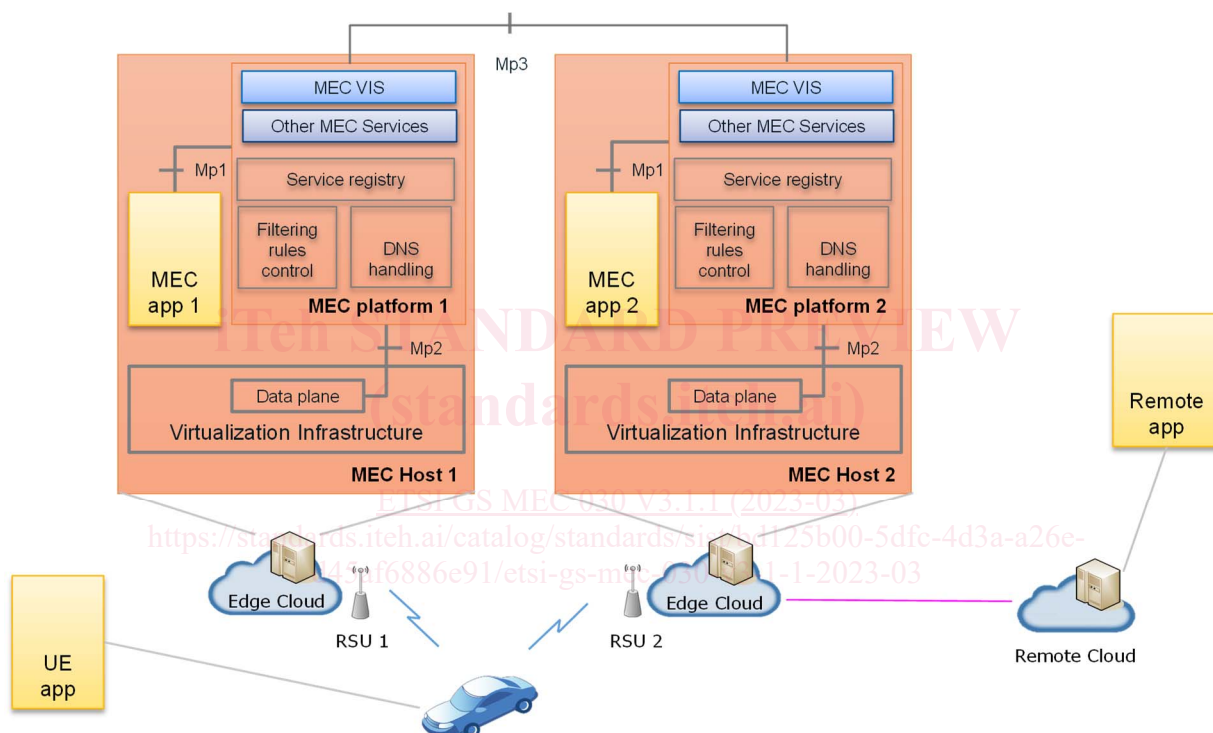

**Figure 5.4.1-1: Example of application instances in a V2X service with VIS API**

Figure 5.4.1-1 illustrates a typical V2X system involving multiple MEC hosts and the use of the VIS service. In the framework of V2X services, a car is hosting a client application, and is connected to a certain MEC host (and a related MEC application). In presence of multiple MEC hosts, the VIS permits to expose information between MEC applications running on different MEC hosts. In addition, other remote application server instances can be located somewhere else (e.g. private clouds owned by the operator or by the OEM). The VIS service may be produced by the MEC platform or by the MEC application.


## 5.4.2 Communication between V2X Control Function (3GPP) and VIS (MEC)

In a 3GPP network, V2X applications can be deployed on V2X Application Server. The V2X Control Function is the NF in core network part, which is used for network-related actions required for V2X. The HSS provides the list of the PLMNs, where the UE is authorized to perform V2X communication over PC5 reference point to the V2X Control Function, see ETSI TS 123 285 [10]. V2 is the reference point between the V2X Application Server and the V2X Control Function in the operator's network.

The VIS defined in MEC is used to facilitate V2X interoperability in a multi-vendor, multi-network and multi-access environment. Therefore, the VIS should obtain the UE's subscription data (e.g. PC5 based V2X communication allowed PLMN), from the V2X Control Function.

Because the V2X Application Server bears multiple V2X applications, it can, therefore, be deployed in MEC platform as a MEC application. The VIS can communicate with the V2X Application Server through Mp1, and it can obtain the UE's V2X subscription data from the V2X Control Function through the V2X Application Server.

NOTE: The VIS, or generic parts of it, can be deployed in the MEC Platform.

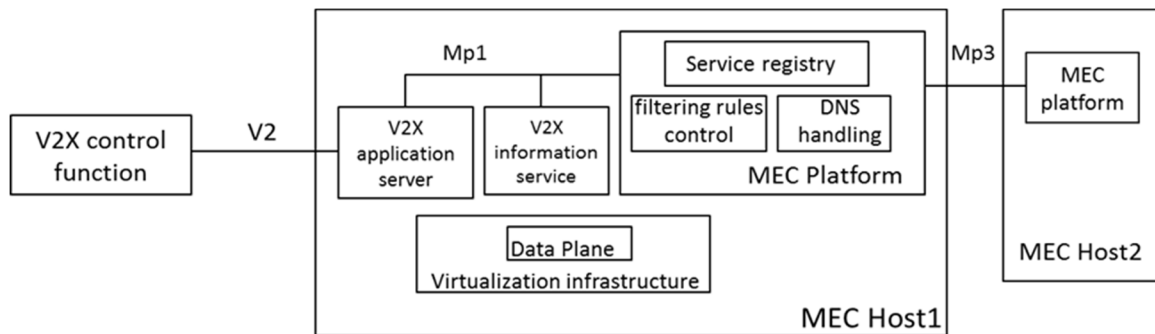

**Figure 5.4.2-1: Example of architecture enabling the communication between the VIS and the V2X Control Function**

### 5.4.3 Inter-MEC system V2X application communication

A V2X MEC application may be required to communicate with its peer applications in other MEC systems in order to fulfil the intended purpose of the application use case. The involved MEC systems need to enable the authorized applications in one MEC system to communicate with their peers in another MEC system.

The discovery of the application peers may be facilitated by the VIS API by exposing the available communication end point information for peer to peer connectivity. Alternatively, the configured traffic rules for the V2X MEC application together with the underlying inter-MEC system connectivity arrangements may support the application peers' communication. Lastly, the V2X MEC application may rely on non-MEC-specific means for its peer discovery and then rely on its authorized access to external interface for the communication.

The required arrangements between the involved MEC systems for realizing secure connectivity with the application specific requirements are deployment specific and beyond the scope of the present document.

### 5.4.4 Inter-MEC system service exposure

A V2X MEC application in one MEC system may be required to consume a service in another MEC system in order to fulfil the intended purpose of the application use case. The V2X MEC application discovers the service in question in the service registry in its local MEC host.

The required arrangements between the involved MEC systems for mapping a service produced in one MEC system to an endpoint in another MEC system are deployment specific and beyond the scope of the present document.

### 5.4.5 The VIS and its role in producing journey-specific predictive QoS notifications

Accurate and timely predictions of the radio environment at locations planned to be visited by vehicles can either trigger, modify or postpone:

- i) the application of certain V2X functionalities; and/or
- ii) the download of content delivery/ software packages.