



SLOVENSKI STANDARD
kSIST-TP FprCEN/TR 13387-3:2018
01-januar-2018

Izdelki za otroke - Smernice o splošni varnosti - 3. del: Nevarnosti zaradi mehanskih lastnosti

Child use and care articles - General safety guidelines - Part 3: Mechanical hazards

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **FprCEN/TR 13387-3**

ICS:

97.190

Otroška oprema

Equipment for children

kSIST-TP FprCEN/TR 13387-3:2018

en

TECHNICAL REPORT
RAPPORT TECHNIQUE
TECHNISCHER BERICHT

FINAL DRAFT
FprCEN/TR 13387-3

November 2017

ICS 97.190

Will supersede CEN/TR 13387-3:2015

English Version

**Child care articles - General safety guidelines - Part 3:
Mechanical hazards**

This draft Technical Report is submitted to CEN members for Vote. It has been drawn up by the Technical Committee CEN/TC 252.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a Technical Report. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a Technical Report.

[SIST-TP CEN/TR 13387-3:2018](https://standards.iteh.ai/catalog/standards/sist/82620ff2-8a2a-4c5f-b472-82b916a68c00/sist-tp-cen-tr-13387-3-2018)

<https://standards.iteh.ai/catalog/standards/sist/82620ff2-8a2a-4c5f-b472-82b916a68c00/sist-tp-cen-tr-13387-3-2018>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents	Page
European foreword.....	6
1 Scope	7
2 Normative references	7
3 Terms and definitions	7
4 Mechanical hazards — Safety philosophy	7
5 Accessibility of mechanical hazards	8
5.1 General.....	8
5.2 Accessibility areas.....	8
5.3 Product information.....	10
6 Entrapment hazards	11
6.1 Introduction.....	11
6.2 Entrapment of head and neck.....	12
6.2.1 Rationale.....	12
6.2.2 Terms and definitions related to entrapment hazards.....	12
6.3 Requirements.....	14
6.4 Test equipment.....	14
6.4.1 Probe philosophy.....	14
6.4.2 Hip probe.....	14
6.4.3 Small head probe.....	15
6.4.4 Large head probe.....	16
6.4.5 Template for partially bound and V shaped openings.....	17
6.4.6 Selection and use of probes.....	18
6.5 Test methodology.....	19
6.5.1 Feet first openings.....	19
6.5.2 Head first openings.....	19
6.5.3 Partially bound, V and irregular shaped openings.....	19
6.6 Entrapment of fingers.....	21
6.6.1 Rationale.....	21
6.6.2 Requirements.....	22
6.6.3 Test equipment.....	23
6.6.4 Test Methodology.....	24
6.7 Rationale for entrapment of limbs, feet and hands.....	24
7 Hazards from moving parts	24
7.1 Rationale.....	24
7.2 General.....	24
7.3 Shearing hazards.....	25
7.3.1 Requirements.....	25
7.3.2 Test equipment.....	25
7.3.3 Test method.....	25
7.4 Requirements for crushing hazards.....	26
8 Hazards with products designed to fold for storage and transportation	26
8.1 Rationale.....	26
8.2 Terms and definitions related to hazards with products designed to fold.....	26
8.3 Requirements.....	26

8.3.1	General	26
8.3.2	Unintentional release of locking mechanisms	26
8.3.3	Test methodology	27
9	Hazards related to attachment mechanisms and opening and closing systems.....	27
9.1	Rationale.....	27
9.2	Requirement.....	27
9.3	Test methodology	28
10	Entanglement hazards	28
10.1	Snagging hazards	28
10.1.1	Rationale.....	28
10.1.2	Requirements.....	28
10.1.3	Test Equipment	28
10.1.4	Test Methodology for loop and mass.....	30
10.2	Cords, ribbons and parts used as ties.....	31
10.2.1	Rationale.....	31
10.2.2	Requirements.....	31
10.2.3	Test methodology	32
10.3	Loops	32
10.3.1	Rationale.....	32
10.3.2	Requirements.....	32
10.3.3	Test methodology	32
11	Choking hazards.....	33
11.1	Introduction.....	33
11.2	Hazard due to small components.....	33
11.2.1	Rationale.....	33
11.2.2	Requirements.....	33
11.2.3	Test equipment (also used in 12.2.3).....	34
11.2.4	Test methodology (also in 12.2.4)	36
11.3	Accessibility of filling materials	37
11.3.1	Rationale.....	37
11.3.2	Requirement.....	37
11.3.3	Test equipment.....	37
11.3.4	Test methodology	39
11.4	Airway obstruction	39
11.4.1	Rationale.....	39
11.4.2	Protective mechanisms of the airway	40
11.4.3	Requirements.....	41
11.4.4	Test equipment.....	41
11.4.5	Test methodology	42
12	Suffocation hazards.....	42
12.1	Introduction.....	42
12.2	Plastic decals and sheeting.....	43
12.2.1	Rationale.....	43
12.2.2	Requirements.....	43
12.2.3	Determination of hazard.....	43
12.2.4	Test equipment.....	44
12.2.5	Test methodology	44
12.3	Non air-permeable packaging.....	45
12.3.1	Rationale.....	45
12.3.2	Requirements - Packaging.....	45
12.3.3	Test equipment.....	46

12.3.4	Test methodology.....	46
13	Ingestion hazards.....	46
13.1	Rationale	46
13.2	Ingestion of small components	46
13.2.1	Requirements	46
13.2.2	Test equipment (Also used in 12.2.3)	47
13.2.3	Test methodology.....	49
14	Hazardous edges and projections.....	50
14.1	Introduction	50
14.2	Edges.....	50
14.2.1	Rationale	50
14.2.2	Requirements - Edges on products and components.....	50
14.2.3	Test methodology.....	51
14.3	Rigid protruding parts	51
14.3.1	Rationale	51
14.3.2	Requirements	51
14.3.3	Test methodology.....	51
14.4	Points and wires.....	51
14.4.1	Rationale	51
14.4.2	Requirement.....	51
15	Structural integrity.....	51
15.1	Introduction	51
15.2	Material suitability.....	52
15.2.1	Rationale	52
15.2.2	Requirements	52
15.3	Strength and durability of the product	53
15.3.1	Rationale	53
15.3.2	Requirements	53
15.3.3	Test methodology.....	53
16	Protective function	53
16.1	Introduction	53
16.2	Barrier function	53
16.2.1	Rationale	53
16.2.2	Requirements	54
16.2.3	Test equipment - Hip probe.....	54
16.2.4	Test methodology.....	55
16.3	Restraint systems.....	55
16.3.1	Rationale	55
16.3.2	Terms and definitions related to restraint systems.....	55
16.3.3	Requirements	56
16.3.4	Test equipment	56
16.3.5	Test methodology.....	57
16.4	Footholds.....	58
16.4.1	Rationale	58
16.4.2	Requirements	58
16.4.3	Test equipment (Templates)	58
16.4.4	Determination of a foothold.....	59
16.4.5	Test methodology.....	60
17	Hazard associated with stability.....	63
17.1	Rationale	63
17.2	General requirement	63

Bibliography 64

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST-TP CEN/TR 13387-3:2018](https://standards.iteh.ai/catalog/standards/sist/82620ff2-8a2a-4c5f-b472-82b916a68c00/sist-tp-cen-tr-13387-3-2018)

<https://standards.iteh.ai/catalog/standards/sist/82620ff2-8a2a-4c5f-b472-82b916a68c00/sist-tp-cen-tr-13387-3-2018>

European foreword

This document (FprCEN/TR 13387-3:2017) has been prepared by Technical Committee CEN/TC 252 “Child care articles”, the secretariat of which is held by AFNOR.

This document is currently submitted to the Vote on TR.

This document will supersede CEN/TR 13387-3:2015.

This new edition of this Technical Report is a hazard based Technical Report. In comparison with the previous version, the main changes related to the section on Mechanical hazards are:

- Ageing and wear: Reworded;
- Accessibility of mechanical hazards: Reworded;
- Entrapment Hazards: Addition of a new finger probe and a hip probe;
- Hazards from moving parts: Moving parts separated into two main areas;
- Entanglement hazards: Improvement of the diagram for the ball and chain test; clarification of the clause for “Cords, ribbons and parts used as ties”;
- Suffocation hazards: Clarification of the clause for “Non air-permeable packaging”;
- Hazardous edges and projections: Drawings deleted;
- Protective function: Addition of a hip probe;
- Footholds: Reworded.

The CEN/TR 13387 series comprises the following five parts:

- Safety philosophy and safety assessment (CEN/TR 13387-1);
- Chemical hazards (CEN/TR 13387-2);
- Mechanical hazards (CEN/TR 13387-3);
- Thermal hazards (CEN/TR 13387-4);
- Product information (CEN/TR 13387-5).

CEN/TR 13387-3 is intended to be used in conjunction with CEN/TR 13387-1.

1 Scope

This document provides guidance information on mechanical hazards that should be taken into consideration when developing safety standards for child use and care articles. In addition, these guidelines can assist those with a general professional interest in child safety.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

CEN/TR 13387-1:2015, *Child use and care articles — General safety guidelines — Part 1: Safety philosophy and safety assessment*

ISO 4593, *Plastics — Film and sheeting — Determination of thickness by mechanical scanning*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

mechanical hazards

physical factors which may give rise to injury due to the mechanical properties of products/product parts

3.2

reach envelopes

age related physical data on the reach limits of the limbs of children in different postures

Note 1 to entry: See 5.2.

3.3

ageing

change of properties of the material due to exposure to environmental factors such as temperature, humidity, UV radiation, cleaning agents, etc.

3.4

mechanical wear

change of mechanical properties due to fatigue or repeated operation of devices, mechanisms and other parts of the product

4 Mechanical hazards — Safety philosophy

This clause addresses the most widely known mechanical hazards and is intended to provide guidance when drafting standards for child use and care articles.

Anthropometric data and information on the abilities of children related to risks are given in CEN/TR 13387-1:2015, Annex A. When using these data for setting requirements, adequate safety margins should be considered. These data refer to static and not dynamic anthropometric data, therefore care should be taken if using these data for anything other than static situations when drafting standards.

FprCEN/TR 13387-3:2017 (E)

When drafting standards, conditions of use should be considered, bearing in mind the behaviour of children. Also, it is to be considered whether the child is attended or unattended when using the product and also the child's access to hazardous features.

For each mechanical hazard a rationale is given, explaining the potential hazard to the child. Requirements, test equipment and test methods are also given. Where appropriate, these can be used when drafting standards.

5 Accessibility of mechanical hazards**5.1 General**

Within the mechanical section no reference is made to specific areas of access, known as access zones. It would be wrong for this guidance document to specify exact areas of access as these should be determined in relation to the hazards and risks of individual products and risks when drafting the standard. As a general guidance to the types of contact associated with mechanical hazards, the following examples are given:

- the hazardous part is in reach of the child from the intended position of use in particular by head, mouth, hands or feet and there is a high probability for frequent, intensive and/or prolonged contact. Requirements need to address this primary contact;
- the hazardous part may be reached by the child or any other child beyond the intended position of use. The product is considered to remain in its intended position(s). Access to hazardous parts is gained by passing/moving around the product or when proceeding to the intended position. The risk of harm deriving from frequent, intensive and/or pro-longed contact may be less probable;
- the hazardous part exists, but cannot be reached by any child.

Irrespective of the access category, the reasonably foreseeable conditions of use should always be considered when designing children's products and/or writing product standards.

5.2 Accessibility areas

Information for determination of accessibility areas in connection with age group is given in Table 1 and Figure 1. These reach envelopes are based on a computer simulation, therefore the dimensions should be treated with care. If in the future experiments with children are undertaken, these figures in the table may be determined more accurately.

Table 1 — Reach envelopes for guidance in the specification of accessibility areas in standards - anthropometric data related to Figure 1


Dimension (mm) ›	Overhead Reach	Overhead Reach on tiptoes	Span	Overhead Reach Sitting	Arm Reach	Buttock-Foot	Lower Leg Length
Age group	L1	L1'	L2	L3	L4	R1	R2
0 month to 6 months	760	-	660	550	250	300	150
6 months to 12 months	880	960	770	610	290	380	190
12 months to 36 months	1 160	1 260	1 020	770	420	550	275
36 months to 48 months	1 270	1 370	1 070	810	460	630	315

All dimensions are based on P95 values. L1, L1', L2, L3, L4, have been assessed with the computer program ADAPS (© 79-93 TU-Delft University of Technology, Faculty of Industrial Design Engineering). R1 = buttock - foot length (Annex A, Table 3). R2 = 0,5 x R1.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST-TP CEN/TR 13387-3:2018](https://standards.iteh.ai/catalog/standards/sist/82620ff2-8a2a-4c5f-b472-82b916a68c00/sist-tp-cen-tr-13387-3-2018)

<https://standards.iteh.ai/catalog/standards/sist/82620ff2-8a2a-4c5f-b472-82b916a68c00/sist-tp-cen-tr-13387-3-2018>

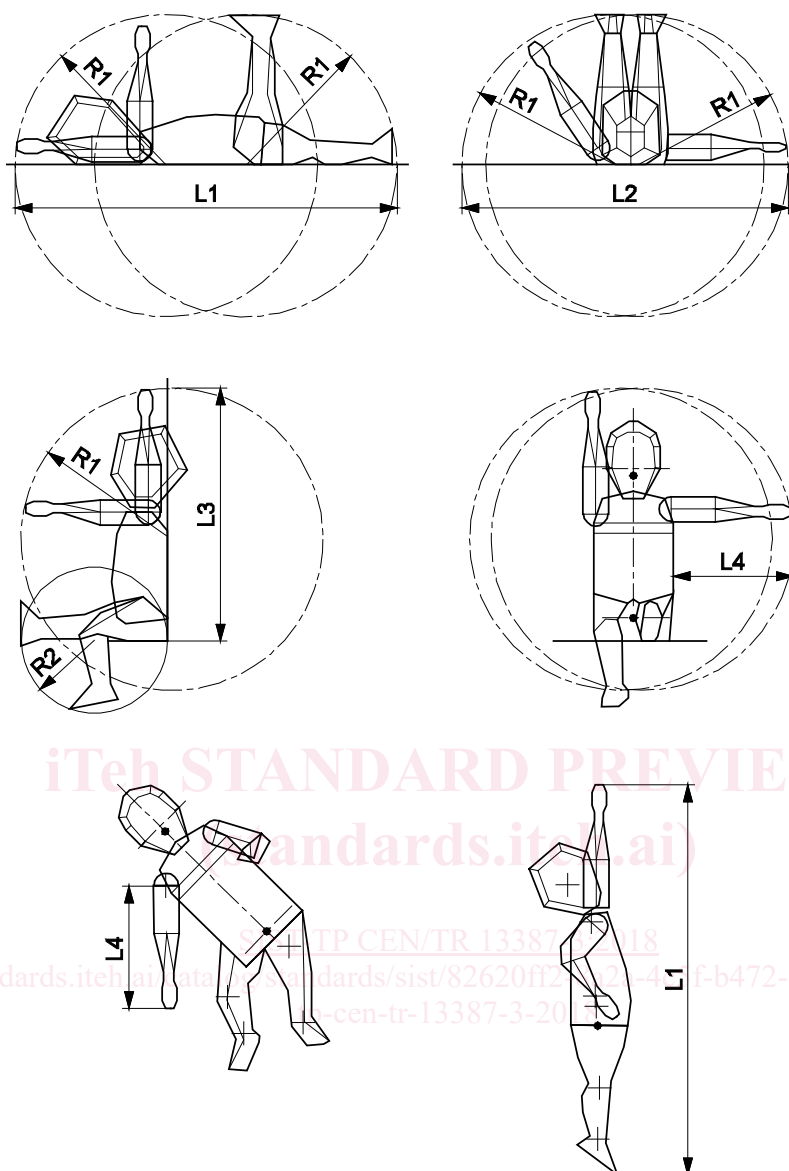

NOTE ©79-93 TU-Delft University of Technology Faculty of Industrial Design Engineering.

Figure 1 — Reach envelopes for determination of accessibility areas

5.3 Product information

In order to ensure mechanical safety, the information for the carer should include appropriate instructions and warnings. For example:

- the need for restraint system and its adjustment;
- the opening and closing of products;
- the operation of safety locks for foldable parts;
- the method of attachment to fixed structures or to other products.

Instructions should also inform the carer of the need to inspect the product regularly and also to use only replacement parts that are approved by the manufacturer/supplier.

CEN/TR 13387-5 “Product information” gives detailed advice concerning the presentation of product information.

6 Entrapment hazards

6.1 Introduction

To avoid entrapment of head, neck, fingers, feet, and hands, safety distances are recommended in relation to the anthropometric data (see CEN/TR 13387-1:2015, Annex A) of the growing child. It is important to take into account the intended age and/or development level of the child. As a priority, those parts of a product which are accessible when a child is using the product as foreseeable should be considered. It may also be appropriate for gaps and openings beyond these accessible areas to be addressed. Gaps and openings which are inaccessible need not to be considered. However, V-shaped openings or V-shaped arrangements of structural members should be avoided.

Important entrapment hazards are:

- entrapment of the neck in situations where the child is incapable of raising its body weight to relieve the pressure (e.g.: crawling child on the outside of play pen, V shapes, etc.);
- entrapment of the neck in situations where the child slips through a gap feet first (e.g.: child slipping between bars/slats);
- entrapment of fingers, which may cause loss of blood supply to the tips.

If it is possible to position a child use and care article next to other furniture or a wall and create an entrapment hazard between them, an instruction should be included to warn carers of this possible entrapment hazard. When considering entrapment hazards dynamic situations should be considered as well as static hazards. The dynamic situation will increase the force being applied to a trapped torso or finger through the weight, movement or momentum of the child which will increase the risk of injury.

To assist with this an entrapment matrix has been included, see Figure 2, which was based on work done in ISO/IEC Guide 50. This entrapment matrix does not impart any hierarchy in the severity of the hazards shown and the specific hazard clause should be referred to.




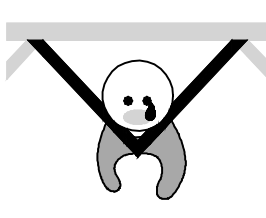



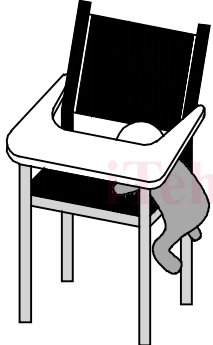
Body part	Completely bound openings		Partially bound openings	V shapes
	Rigid	Non-rigid		
Head neck, head first				
Finger				
Head neck, feet first				

Figure 2 — Entrapment matrix

6.2 Entrapment of head and neck

6.2.1 Rationale

Head and neck hazards occur when the child is in a position where its body weight is supported by its neck and the child is incapable of lifting its body weight to relieve pressure on its neck. When this occurs it will cause airways to close and restrict the blood flow leading to brain damage.

The risk of head and neck entrapment increases as the child's mobility and ability increases, enabling the child to access a wider range of hazards and products. The hazard is directly related to the size of the child's head and hip.

The hazard can be avoided by limiting the size and shape of completely bound, partially bound and 'V' shaped openings (see definitions in 6.2.2).

6.2.2 Terms and definitions related to entrapment hazards

6.2.2.1

completely bound opening

opening that is continuously surrounded on all sides by the material of the product, see Figure 3

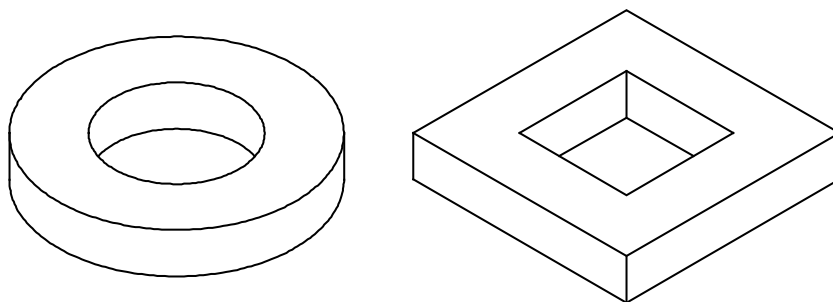


Figure 3 — Examples of completely bound openings

6.2.2.2

partially bound opening

opening that is partially surrounded by the material of the product, see Figure 4

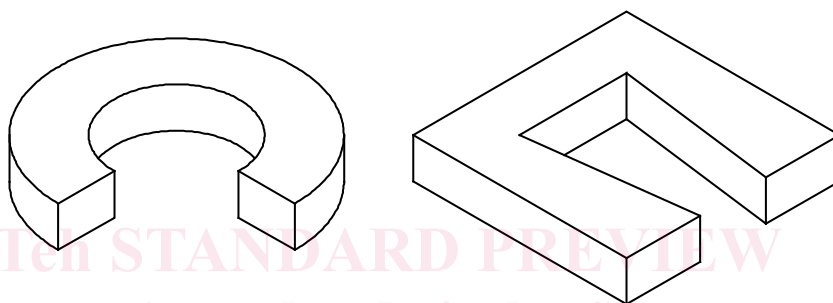


Figure 4 — Examples of partially bound openings

6.2.2.3

V shaped opening

opening where there is a slot that narrows towards the bottom, see Figure 5

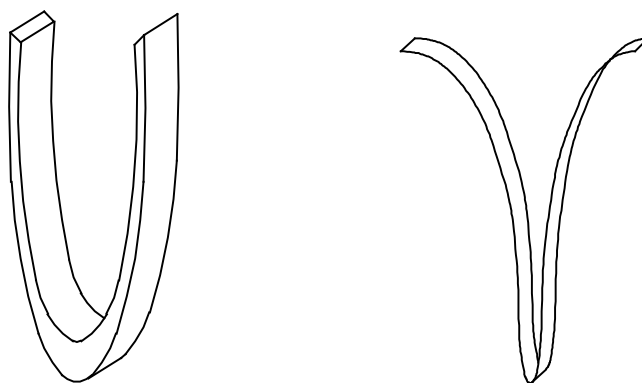


Figure 5 — Examples of V shaped openings

6.2.2.4

irregular shaped opening

opening that does not have a symmetrical shape, see Figure 6