

---

**Aeronavtika - Prirobnične spojke - Robna tesnila z zalivko iz nikljeve zlitine na toplotno odporni jekleni plošči s 3 pritrdilnimi luknjami - Palčne mere**

Aerospace series - Flange couplings - Gasket seal with nickel alloy C seal on heat resisting steel plate with 3 fastening holes - Inch series

Luft- und Raumfahrt - Rohrverschraubung mit Flanschen - Flachdichtung aus Nickellegierung, mit Stahlmantelung aus hochwärmefestem Stahl mit 3 Befestigungslöchern - Inch-Reihe

(standards.iteh.ai)

Série aérospatiale - Raccordement à bride - Joint plaque avec joint C en alliage de nickel sur plaque en acier résistant à chaud avec 3 trous de fixation - Série en inches

<https://standards.iteh.ai/catalog/standards/sist/6059d987-6250-49ab-ac58-6419ea2aba21/sist-en-4810-2018>

**Ta slovenski standard je istoveten z: EN 4810:2017**

---

**ICS:**

|           |   |  |
|-----------|---|--|
| 23.040.60 | Prirobnice, oglavki in spojni elementi            | Flanges, couplings and joints          |
| 49.080    | Letalski in vesoljski hidravlični sistemi in deli | Aerospace fluid systems and components |

**SIST EN 4810:2018****en,fr,de**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 4810:2018

<https://standards.iteh.ai/catalog/standards/sist/b039d987-b230-49ab-ae38-6419ea2aba21/sist-en-4810-2018>

EUROPEAN STANDARD

EN 4810

NORME EUROPÉENNE

EUROPÄISCHE NORM

April 2017

ICS 49.080

English Version

## Aerospace series - Flange couplings - Gasket seal with nickel alloy C seal on heat resisting steel plate with 3 fastening holes - Inch series

Série aérospatiale - Raccordement à bride - Joint plaque avec joint C en alliage de nickel sur plaque en acier résistant à chaud avec 3 trous de fixation - Série en inches

Luft- und Raumfahrt - Rohrverschraubung mit Flanschen - Flachdichtung aus Nickellegierung, mit Stahlmantelung aus hochwarmfestem Stahl mit 3 Befestigungslöchern - Inch-Reihe

This European Standard was approved by CEN on 14 November 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels**

## Contents

|                                  | Page |
|----------------------------------|------|
| European foreword.....           | 3    |
| 1 Scope .....                    | 4    |
| 2 Normative references .....     | 4    |
| 3 Required characteristics ..... | 5    |
| 4 Designation.....               | 7    |
| 5 Identification marking .....   | 7    |
| 6 Technical specification.....   | 7    |
| 7 Quality Assurance.....         | 7    |

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 4810:2018](https://standards.iteh.ai/catalog/standards/sist/b039d987-b230-49ab-ac38-6419ea2aba21/sist-en-4810-2018)

<https://standards.iteh.ai/catalog/standards/sist/b039d987-b230-49ab-ac38-6419ea2aba21/sist-en-4810-2018>

## European foreword

This document (EN 4810:2017) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2017, and conflicting national standards shall be withdrawn at the latest by October 2017.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

ITEH STANDARD PREVIEW  
(standards.iteh.ai)

[SIST EN 4810:2018](https://standards.iteh.ai/catalog/standards/sist/b039d987-b230-49ab-ac38-6419ea2aba21/sist-en-4810-2018)

<https://standards.iteh.ai/catalog/standards/sist/b039d987-b230-49ab-ac38-6419ea2aba21/sist-en-4810-2018>

**EN 4810:2017 (E)****1 Scope**

This standard specifies the characteristics of gasket seal with nickel alloy C seal on heat resisting steel, 3 holes, for pipe couplings for inch series aerospace applications.

Nominal pressure: up to 21 000 kPa; depends on the associated tube material and tube wall thickness in the assembly (see EN 4814).

Temperature range: -55 °C to 600 °C.

NOTE Assembly in accordance with TR 4815.

This part should not be reused after disassembling.

**2 Normative references**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2407, *Aerospace series — Heat resisting alloy NI-PH2601(NiCr19Fe19Nb5Mo3) — Solution treated and precipitation treated — Sheet, strip and plate — 0,2 mm ≤ a ≤ 10 mm*

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2516, *Aerospace series — Passivation of corrosion resistant steels and decontamination of nickel base alloys*

EN 3480, *Aerospace series — Steel FE-PA3601 (X6CrNiTi18-10) — Air melted — Softened — Plate — 6 mm < a ≤ 50 mm — 500 MPa ≤ R<sub>m</sub> ≤ 700 MPa*

<https://standards.iteh.ai/catalog/standards/sist/b039d987-b230-49ab-ae38-48102018>

EN 3488, *Aerospace series — Steel FE-PA3601 (X6CrNiTi18-10) — Air melted — Softened — Sheet and strip — a ≤ 6 mm — 500 MPa ≤ R<sub>m</sub> ≤ 700 MPa*

EN 4814, *Aerospace series — Flange couplings up to 21 000 kPa — Technical specification — Inch series*

EN 4816, *Aerospace series — Flange couplings — Gasket seal with nickel alloy C seal — Technical specification — Inch series*

EN 9100, *Quality Management Systems — Requirements for Aviation, Space and Defence Organizations*

ISO 1456, *Metallic and other inorganic coatings — Electrodeposited coatings of nickel, nickel plus chromium, copper plus nickel and of copper plus nickel plus chromium*

TR 4815, *Aerospace series — Flange couplings up to 21 000 kPa — Design standard — Inch series<sup>1)</sup>*

---

<sup>1)</sup> Published as ASD-STAN Technical Report at the date of publication of this standard. (<http://www.asd-stan.org/>)

### 3 Required characteristics

#### 3.1 Configuration - Dimensions - Tolerances - Masses

See Figure 1 and Table 1. Dimensions and tolerances are in millimetres, except otherwise specified.

#### 3.2 Material

Plate: EN 3480 or EN 3488.

Seal: EN 2407.

#### 3.3 Surface treatment

Plate: Passivation EN 2516.

Seal: ISO 1456.

#### 3.4 Assembly

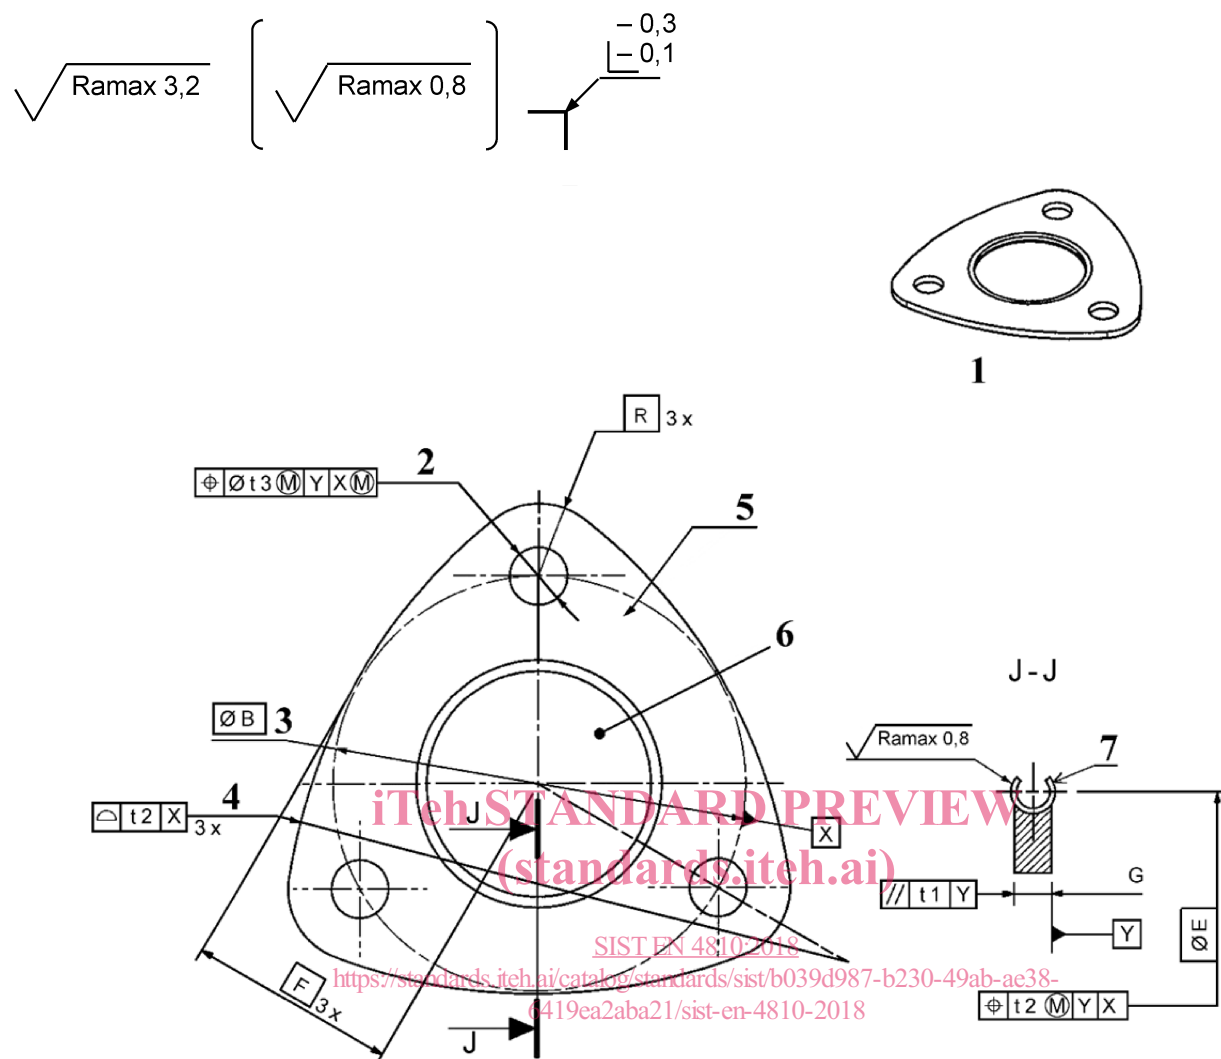
C seal shall not be disassembled from the plate after a drop down from at least 200 mm height.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 4810:2018](https://standards.iteh.ai/catalog/standards/sist/b039d987-b230-49ab-ac38-6419ea2aba21/sist-en-4810-2018)

<https://standards.iteh.ai/catalog/standards/sist/b039d987-b230-49ab-ac38-6419ea2aba21/sist-en-4810-2018>

EN 4810:2017 (E)

**Key**

- 1 3D view
- 2 3 equally spaced holes  $\varnothing D$
- 3 Location of holes
- 4 Radius ( $3x$ ). Surface geometric tolerance applies to  $F$  and  $R$
- 5 Marking
- 6 Hole diameter for the fluid flow equal to  $S$
- 7 Form not stated are left to the manufacturer's discretion with a theoretical diameter of 1,57 mm and a thickness of 0,15 mm minimum.

**Figure 1**