

FINAL
DRAFT

INTERNATIONAL
STANDARD

ISO/IEC
FDIS
15149-3

ISO/IEC JTC 1/SC 6

Secretariat: KATS

Voting begins on:
2015-09-16

Voting terminates on:
2015-11-16

**Information technology —
Telecommunications and information
exchange between systems —
Magnetic field area network (MFAN) —
Part 3:
Relay Protocol for Extended Range**

*Technologies de l'information — Téléinformatique — Réseau de zone
de champ magnétique (MFAN)*

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/IEC FDIS 15149-3:2015(E)

© ISO/IEC 2015

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/21d26c5b-dd48-43a6-a592-38563d05603c/iso-iec-15149-3-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviated terms	2
5 Overview	2
6 Network elements	2
6.1 General.....	2
6.2 Time element.....	2
6.2.1 Request period.....	3
6.2.2 Response period.....	3
6.2.3 Spontaneous period.....	3
6.3 Physical element.....	3
6.3.1 MFAN-C.....	4
6.3.2 MFAN-N.....	4
6.3.3 MFAN-R.....	4
6.4 Address element.....	4
6.4.1 Node ID.....	4
7 Network functions	5
7.1 General.....	5
7.2 Request period.....	5
7.3 Response period.....	5
7.4 Spontaneous period.....	5
8 Network status	5
8.1 General.....	5
8.2 Network configuration.....	5
8.3 Network association.....	5
8.4 Network disassociation.....	6
8.5 Network association check.....	6
8.6 Data transmission.....	6
8.7 Network release.....	6
8.8 MFAN device status.....	6
9 MAC layer frame format	6
9.1 General.....	6
9.2 Frame format.....	6
9.3 Frame type.....	6
9.4 Payload format.....	7
9.4.1 Request frame.....	7
9.4.2 Response frame.....	7
9.4.3 Response confirmation frame.....	8
9.4.4 Response confirmation block.....	9
10 MAC layer function	10
10.1 General.....	10
10.2 Repeater set-up.....	10
Bibliography	11

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword Supplementary information](#)

The committee responsible for this document is ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

This first edition of ISO/IEC 15149-3, together with ISO/IEC 15149-1, ISO/IEC 15149-2, and ISO/IEC 15149-4, cancels and replaces ISO/IEC 15149:2011, which has been technically revised.

ISO/IEC 15149 consists of the following parts, under the general title *Information technology — Telecommunications and information exchange between systems*:

- *Part 1: Air Interface*
- *Part 2: In-Band Control Protocol for Wireless Power Transfer*
- *Part 3: Relay Protocol for Extended Range*
- *Part 4: Security Protocol for Authentication*

Introduction

This International Standard provides protocols for magnetic field area network (MFAN). MFAN can support the service based on wireless communication and wireless power transfer in harsh environment. MFAN is composed of four protocols; Air Interface, in-band control protocol, relay protocol, and security protocol.

ISO/IEC 15149-1 specifies the physical layer and media access control layer protocols of wireless network over a magnetic field.

ISO/IEC 15149-2 specifies the control protocol for wireless power transfer based on magnetic field area network.

ISO/IEC 15149-3 specifies the relay protocol to extend effective network coverage of magnetic field area network.

ISO/IEC 15149-4 specifies the security protocol to authenticate nodes to communicate in magnetic field area network.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/21d26c5b-dd48-43a6-a592-38563d05603c/iso-iec-15149-3-2016>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/21d26c5b-dd48-43a6-a592-38563d05603c/iso-iec-15149-3-2016>

Information technology — Telecommunications and information exchange between systems — Magnetic field area network (MFAN) —

Part 3: Relay Protocol for Extended Range

1 Scope

This International Standard specifies relay protocol to extend effective network coverage of magnetic field area network. The addressing, request and response code are defined.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 15149-1:2014, *Information technology — Telecommunications and information exchange between systems — Magnetic field area network (MFAN) — Part 1: Air interface*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in the other of ISO/IEC 15149 and the following apply.

3.1

wireless power transfer

WPT

mechanism in which a unit having enough power wirelessly transfer it to other units

3.2

Magnetic Field Area Network

MFAN

wireless network that provides reliable communication in harsh environments using magnetic field

3.3

Magnetic Field Area Network - Coordinator

MFAN-C

device that manages the connection and release of nodes within the communication area and the sending and receiving time of data in an MFAN

3.4

Magnetic Field Area Network - Node

MFAN-N

device except the coordinator that forms a network in an MFAN

3.5

Magnetic Field Area Network - Repeater

MFAN-R

device among MFAN-Ns that performs partial functions of coordinator

4 Symbols and abbreviated terms

The following acronyms are used in this document:

RSRq	Repeater Set-up Request
RSRs	Repeater Set-up Response
RSRA	Repeater Set-up Response Acknowledgement

5 Overview

MFAN is a wireless communication network that can transmit and receive data over a magnetic field in a low frequency band (30kHz~300kHz.) Wireless communication over a magnetic field enables reliable communication and extends the communication system coverage around metal, soil, and water. It is designed using those characteristics of the magnetic field communication. It uses a low carrier frequency for reliable communication and large magnetic field area in harsh environments, a simple and robust modulation like BPSK for a low implementation cost and error probability, and a dynamic coding technique like Manchester or NRZ-L coding for noise robustness. In essence, it provides several kbps data transmission within a distance of several meters.

There are three types of devices associated to MFAN: MFAN-C, MFAN-N, and MFAN-R. Only a single MFAN-C is to exist per a single MFAN, while together with several associated MFAN-Ns consist MFAN. MFAN-R, capable of creating a relay network, connects out-of-boundary MFAN-Ns to MFAN.

Within MFAN, the primary and the first device to be settled is MFAN-C. Once the coordinator is ready to broadcast request packets, MFAN superframe is initiated. MFAN-C is in charge of association, disassociation, and management of data transmission with MFAN-Ns and MFAN-Rs. There is only a single channel within MFAN communication range, which means there will be no more than a single network in MFAN. Therefore, except for a single MFAN-C, the rest devices are to be either MFAN-N or MFAN-R. All the devices of MFAN are classified as MFAN-C, MFAN-N, and MFAN-R, but any device can take the role of MFAN-C, MFAN-N, or MFAN-R. MFAN-C and each MFAN-N are connected on 1:1 basis.

6 Network elements

6.1 General

The network elements of MFAN relay network consist of time and physical elements.

6.2 Time element

MFAN relay network is capable of utilizing TDMA management. MFAN-C manages a group of MFAN-Ns and MFAN-Rs by allocating appropriate request time slot. Depending on the status of MFAN-Ns and MFAN-Rs, response period is adjusted.

The structure of MFAN relay network superframe is described in [Figure 1](#). The superframe is divided into three stages: request period, response period, and spontaneous period. The length of each stage is variable. The superframe is initiated when MFAN-C transfer response request packet during the request period. The response request packet contains information for MFAN-Ns and MFAN-Rs to return relevant response back to MFAN-C during the response period. MFAN-Ns may be approved to participate as MFAN-Rs upon the request of MFAN-C.

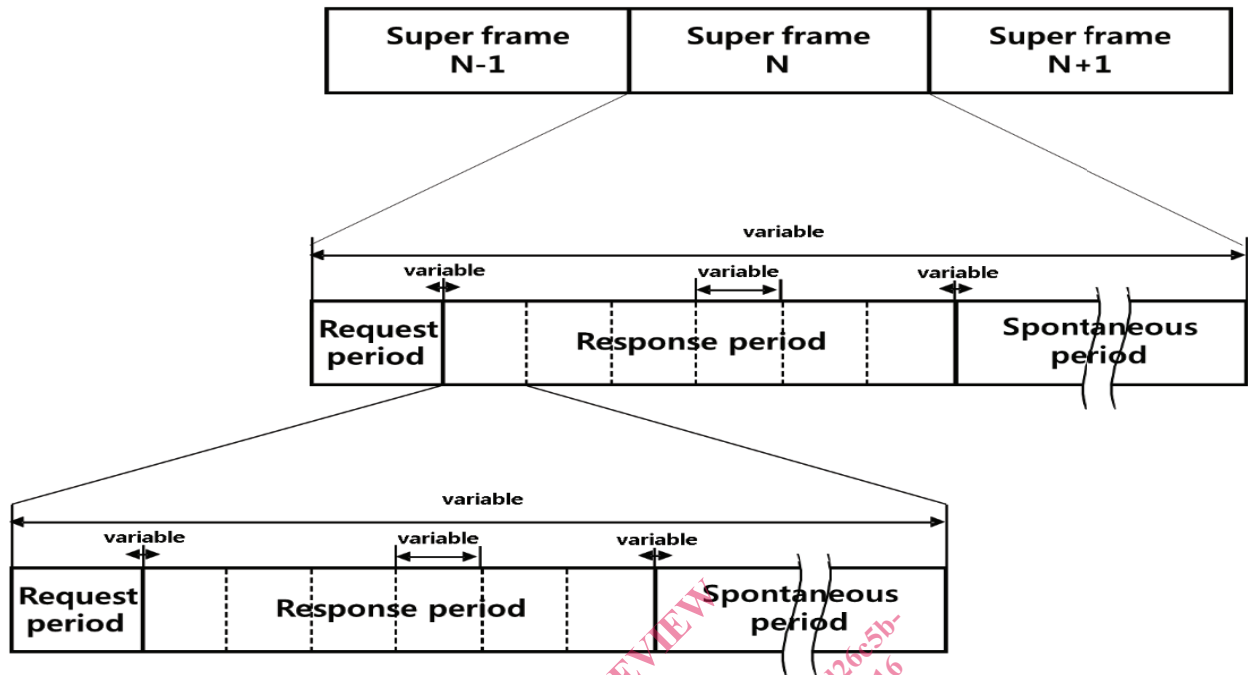


Figure 1 — Superframe structure of relay network

If approved, MFAN-R shall be allocated of time slot, just like other MFAN-Ns. However, within the time slot, MFAN-R shall sub-divide again its time slot to create superframe within its time slot. In this case, MFAN-R creates a relay network with MFAN-Ns unreachable from the MFAN-C.

6.2.1 Request period

In the request period of MFAN relay network, MFAN-R shall delivers response request packet to MFAN-Ns so they can return relevant response packet during response period.

6.2.2 Response period

In the response period of MFAN relay network, MFAN-Ns which are joined to MFAN relay network by MFAN-R return response packet back to MFAN-R based on the response request packet. Response period is divided into a number of time slots by the number of devices in MFAN relay network. The length of each time slot is variable depending on the length of response packet and acknowledgement packet. The time slots are numbered in periodical order to be allocated to appropriate MFAN-N. MFAN-R manages the allocation of time slots for data and packet transmission.

6.2.3 Spontaneous period

The spontaneous period of MFAN relay network begins when there is not a device returning response packet for a certain length of time. In this period, MFAN-Ns which are joined to MFAN relay network by MFAN-R can transfer data without the request of MFAN-R. The period lasts during the time which is allocated for MFAN-R by MFAN-C.

6.3 Physical element

The physical element of MFAN relay network consists of devices that are MFAN-C, MFAN-N, and MFAN-R. MFAN relay network is a network that enables communication between a MFAN-C and individual MFAN-Ns and MFAN-Rs; its basic element is device. Depending on its role, a device is categorized as MFAN-C, MFAN-N or MFAN-R. MFAN-C manages the entire MFAN relay network, and there will only be a single MFAN-C within a relay network. MFAN-C manages MFAN-Ns and MFAN-Rs by broadcasting