



SLOVENSKI STANDARD
oSIST prEN 1646-1:2017
01-junij-2017

Bivalna počitniška vozila - Avtodomi - 1. del: Zdravstvene in varnostne zahteve za bivanje

Leisure accommodation vehicles - Motor caravans - Part 1: Habitation requirements relating to health and safety

Bewohnbare Freizeitfahrzeuge - Motorcaravans - Teil 1: Anforderungen an den Wohnbereich hinsichtlich Gesundheit und Sicherheit

Véhicules habitables de loisirs - Autocaravanes - Partie 1 : Exigences d'habitation relatives à la santé et à la sécurité

Ta slovenski standard je istoveten z: prEN 1646-1

<https://standards.iteh.ai/catalog/standards/sist/23dc3a75-414c-4c1d-ad21-1c5746f3fe3d/sist-en-1646-1-2018>

ICS:

43.100	Osebni avtomobili. Bivalne prikolice in lahke prikolice	Passenger cars. Caravans and light trailers
--------	---	---

oSIST prEN 1646-1:2017

en,fr,de

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 1646-1

March 2017

ICS 43.100

Will supersede EN 1646-1:2012

English Version

Leisure accommodation vehicles - Motor caravans - Part 1: Habitation requirements relating to health and safety

Véhicules habitables de loisirs - Autocaravanes - Partie
1 : Exigences d'habitation relatives à la santé et à la
sécurité

Bewohnbare Freizeitfahrzeuge - Motorcaravans - Teil
1: Anforderungen an den Wohnbereich hinsichtlich
Gesundheit und Sicherheit

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 245.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

	Page
European foreword.....	5
Introduction	6
1 Scope.....	7
2 Normative references.....	7
3 Terms and definitions	7
4 Testing.....	7
5 Design and construction.....	8
5.1 Occupancy.....	8
5.2 Entrance steps to living area.....	8
5.2.1 Heights	8
5.2.2 Minimum tread dimensions.....	8
5.2.3 Mechanical strength.....	8
5.2.4 Slip resistance test.....	8
5.3 Doors.....	9
5.3.1 Dimensions.....	9
5.3.2 Securing doors.....	9
5.3.3 Childproof locking systems	9
5.3.4 Dead-locking systems.....	9
5.4 Awning rails	9
6 Internal equipment	9
6.1 Bunks.....	9
6.1.1 Mattress and/or upholstery.....	9
6.1.2 Clearance.....	9
6.1.3 Protection against falling out.....	10
6.1.4 Mechanical strength.....	10
6.1.5 Security of folding bunks.....	10
6.1.6 Access to high level bunks.....	11
6.1.7 Protection against entrapment.....	11
6.2 Cupboards.....	11
6.3 Cooking appliance.....	11
7 Drinking water supply, storage and disposal of waste water.....	12
7.1 Couplings for drinking water supply	12
7.2 Drinking water	12
7.2.1 Tanks	12
7.2.2 Materials.....	12
7.2.3 Marking.....	12
7.3 Waste water disposal tank.....	12
7.4 Toilet waste disposal	12
7.4.1 Discharge systems	12
7.4.2 Outlets and couplings from toilet holding tanks	12
8 Appliances.....	12
8.1 Installation of appliances.....	12
8.2 Restriction concerning supply of appliances.....	13

9	Heating	13
10	Installations.....	13
10.1	Electricity.....	13
10.1.1	Low voltage	13
10.1.2	Extra low voltage	14
10.2	Liquefied petroleum gas (LPG).....	14
11	Ventilation.....	14
11.1	General	14
11.2	Adjustment of ventilators.....	14
11.3	Location of ventilation openings.....	14
12	Fire precautions	14
12.1	Means of escape.....	14
12.1.1	Emergency exits	14
12.1.2	Escape path	14
12.1.3	Sanitation compartments	15
12.1.4	Emergency doors	15
12.1.5	Interior doors.....	15
12.1.6	Emergency windows and emergency panels.....	15
12.1.7	Work surfaces	17
12.1.8	Heating and cooking equipment	17
12.2	Protection of flammable elements	17
12.2.1	Rigid or guided elements	17
12.2.2	Non-guided elements	18
12.3	Hotplates.....	18
13	Warning notice	18
13.1	Provision of warning notice.....	18
13.2	Content of warning notice	19
14	User's handbook	19
Annex A	(normative) Strength of entrance step (see 5.3).....	21
A.1	Principle.....	21
A.2	Preparation and procedure	21
A.3	Expression of results	21
A.4	Test report	22
Annex B	(normative) Slip resistance test (see 5.2.4).....	23
B.1	Principle.....	23
B.2	Preparation and procedure	23
B.3	Expression of results	24
B.4	Test Report.....	24
Annex C	(normative) Separate entrance step stability test (see 5.2.4.2)	25
C.1	Principle.....	25
C.2	Preparation and procedure	25
C.3	Expression of results	26
C.4	Test report	26
Annex D	(normative) Clear height over bunks (see 6.1.2)	27
D.1	Principle.....	27
D.2	Preparation and procedure	27
D.3	Expression of results	27
D.4	Test report	27

prEN 1646-1:2017 (E)

Annex E (normative) Strength of protection against falling out of bunks (see 6.1.3.3)	28
E.1 Principle	28
E.2 Preparation and procedure	28
E.3 Expression of results	28
E.4 Test report	28
Annex F (normative) Mechanical strength of bunks (see 6.1.4)	29
F.1 Principle	29
F.2 Selection of bunk	29
F.3 Preparation and procedure	29
F.4 Expression of results	29
F.5 Test report	29
Annex G (normative) Security of folding bunks (see 6.1.5)	30
G.1 Principle	30
G.2 Preparation and procedure	30
G.3 Expression of results	30
G.4 Test report	30
Annex H (normative) Safety of access to high level bunks (see 6.1.6)	31
H.1 Principle	31
H.2 Preparation and procedure	31
H.2.1 General	31
H.2.2 Attachment and deflection	31
H.3 Expression of results	31
H.4 Test report	31
Annex I (normative) Measurement of gaps (see 6.1.7)	33
I.1 Cone measuring device	33
I.2 Gaps in the base structure	33
I.3 Measurement of gaps	33
Annex J (normative) Heating (see Clause 9)	35
J.1 Principle	35
J.2 Preparation and procedure	35
J.3 Expression of results	35
J.4 Test report	35
Annex K (normative) Test equipment	37
K.1 General	37
K.2 Load measuring cell	37
K.3 Load measuring cell	37
K.4 Certified weights	37
K.5 Load spreading platform	37
K.6 Load spreading platform	37
K.7 Step testing device	37
K.8 Flexible load spreading device	38
K.9 Step testing plate	38
K.10 Friction test piece	38
K.11 Ball	39
K.12 Cone measuring device	39
Annex L (informative) Environmental aspects	40
Bibliography	41

European foreword

This document (prEN 1646-1:2017) has been prepared by Technical Committee CEN/TC 245 “Leisure accommodation vehicles”, the secretariat of which is held by AFNOR.

This document is currently submitted to the CEN Enquiry.

This document will supersede EN 1646-1:2012.

EN 1646, *Leisure accommodation vehicles — Motor caravans*, is currently composed with the following parts:

- *Part 1: Habitation requirements relating to health and safety;*
- *Part 2: User payload.*

In relation to EN 1646-1:2012, the main technical changes are:

- a) reference to EN 1646-2 (withdrawn) deleted throughout the document;
- b) in 5.2.2 “Minimum tread dimensions”, requirements specified;
- c) new 5.3.4 added for dead-locking systems;
- d) 6.1.3 “Protection against falling out” simplified;
- e) in 7.4.2 “Outlets and couplings from toilet holding tanks”, requirements specified and extended;
- f) 12.1.2 “Escape path” and 12.1.3 “Sanitation compartment” clarified;
- g) 12.1.6 “Emergency windows and emergency panels” modified;
- h) 12.3 “Protection of flammable elements” specified;
- i) in Clause 14 “User’s handbook”, information added and new types of fire extinguisher covered;
- j) normative references updated;
- k) editorially modified.

Introduction

Figure 1 gives an overview of the relevant European Standards for caravans, motor caravans and caravan holiday homes.

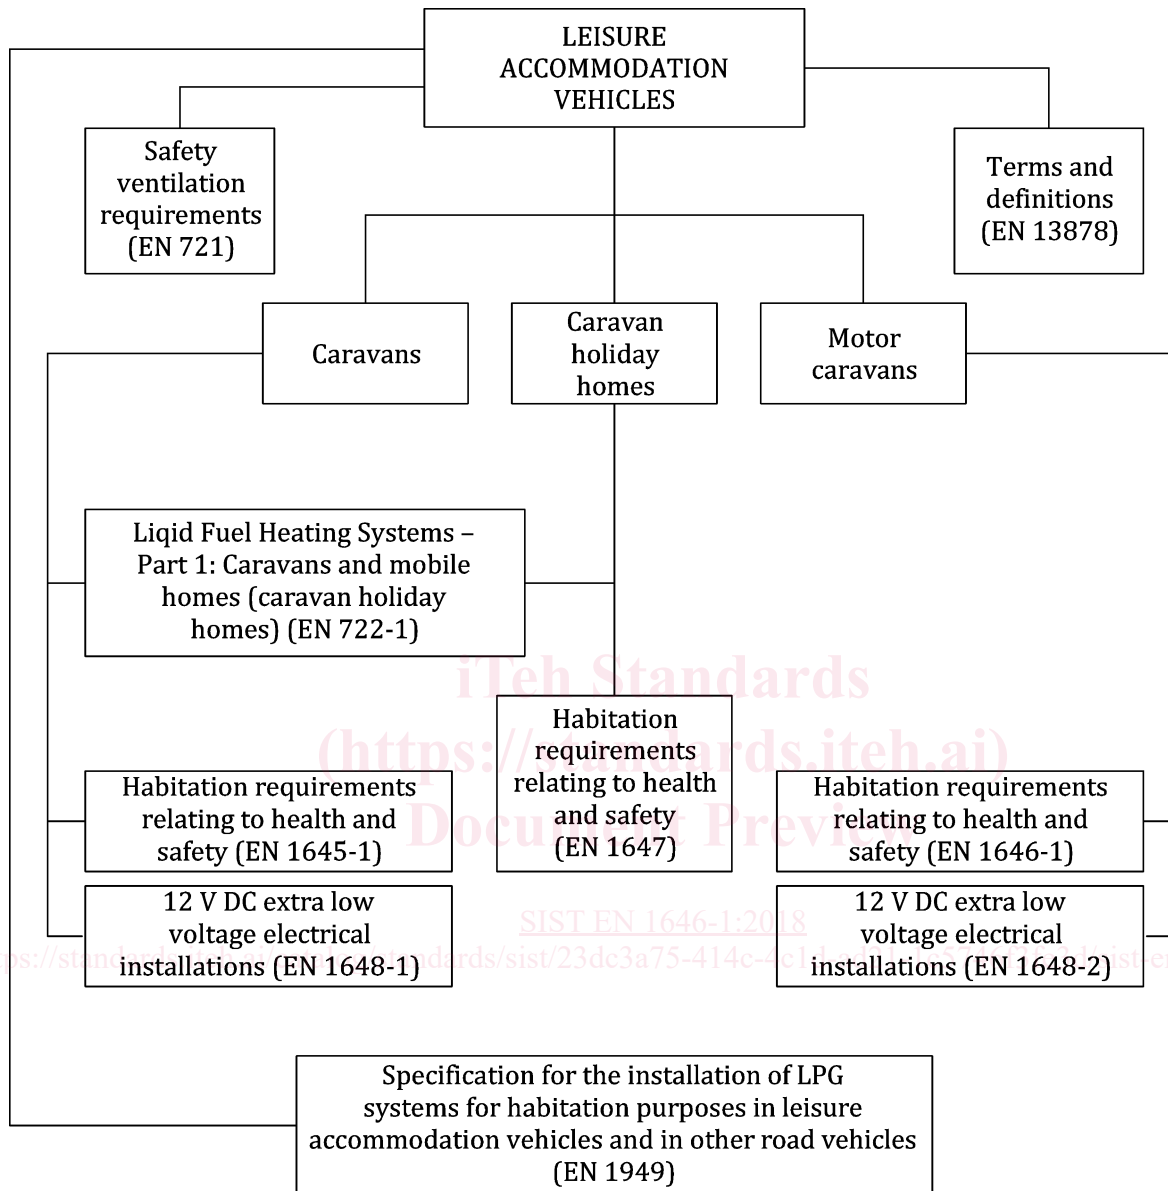


Figure 1 — Overview of relevant European Standards applying to leisure accommodation vehicles

1 Scope

This European Standard specifies requirements intended to ensure the safety and health of persons when they use motor caravans for temporary or seasonal habitation.

It also specifies the corresponding test methods.

Specific requirements of this European Standard apply to motor caravans where the overall length multiplied by the overall width does not exceed 13,5 m² plan area.

Requirements applicable to road safety are not included in the scope of this European Standard.

This European Standard is applicable exclusively to motor caravans as defined in EN 13878.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 3-7, *Portable fire extinguishers — Part 7: Characteristics, performance requirements and test methods*

EN 721, *Leisure accommodation vehicles — Safety ventilation requirements*

EN 1648-2, *Leisure accommodation vehicles — 12 V direct current extra low voltage electrical installations - Part 2: Motor caravans*

EN 1949, *Specification for the installation of LPG systems for habitation purposes in leisure accommodation vehicles and accommodation purposes in other vehicles*

EN 13878, *Leisure accommodation vehicles — Terms and definitions*

HD 60364-7-721, *Low-voltage electrical installations — Part 7-721: Requirements for special installations or locations — Electrical installations in caravans and motor caravans (IEC 60364-7-721)*

EN ISO 8936, *Awnings for leisure accommodation vehicles — Requirements and test methods (ISO 8936)*

ISO 4649:2010, *Rubber, vulcanized or thermoplastic — Determination of abrasion resistance using a rotating cylindrical drum device*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 13878 apply.

4 Testing

The tests described in Annexes A to K are intended to verify that a motor caravan representative of a given model, including its fixtures and fittings, meets the requirements of this European Standard.

These tests are intended to simulate the most onerous conditions, for the relevant characteristics.

It is recommended to take environmental aspects into account during development, production and disposal of motor caravans based on established knowledge and within the respective technical possibilities (see also Annex L).

prEN 1646-1:2017 (E)**5 Design and construction****5.1 Occupancy**

The manufacturer shall designate the occupancy as the number of berths, both standard berths and additional berths provided by the manufacturer and shall include it in the user's handbook and in his brochures. The occupancy is also necessary to determine the ventilation requirements (see EN 721).

NOTE The number of seating positions defined on the registration certificate might be different.

5.2 Entrance steps to living area**5.2.1 Heights**

When the entrance height of the motor caravan, measured at maximum technically permissible laden mass, and standing on horizontal ground, exceeds 400 mm, the motor caravan shall either be fitted with an entrance step, attachable or integral with the structure of the motor caravan, or a separate entrance step(s) shall be provided.

The rise of the first tread shall not exceed 400 mm. The rise of any other tread shall not exceed 300 mm.

It is recommended that all separate step(s) be attached to the motor caravan when in use to improve their stability.

It is recommended that the rise of the steps be equal.

5.2.2 Minimum tread dimensions

The minimum tread dimensions shall be:

- a) attachable or integral entrance steps: 150 mm going over a minimum, uninterrupted width of 320 mm;
- b) separate steps: 270 mm going over a minimum, uninterrupted width of 450 mm.

5.2.3 Mechanical strength

An entrance step and any fixing devices shall be capable of withstanding a force of 2 000 N applied to any surface area of 100 mm × 150 mm of the tread(s).

After application of this force for a period of 5 min, any permanent deformation caused shall not exceed 5 mm.

The strength of each step shall be tested in accordance with Annex A.

5.2.4 Slip resistance test**5.2.4.1 Attachable or integral step**

An attachable or integral step shall have a slip resistant surface.

The slip resistance shall be tested in accordance with Annex B.

5.2.4.2 Separate entrance step

A separate entrance step shall have a slip resistant surface. The slip resistant surface shall be tested in accordance with Annex B after having immobilized the feet or base of the step.

In addition, a separate step shall remain stable when tested in accordance with Annex C.

5.3 Doors

5.3.1 Dimensions

5.3.1.1 Motor caravans above 13,5 m² plan area

Each exterior door opening to the habitation area shall have a minimum clear height of 1 590 mm and a minimum clear width of 480 mm and corners of maximum radius of 90 mm. The locking system may intrude on the minimum width up to 30 mm and for a maximum height of 150 mm, regardless of the number of locks.

5.3.1.2 Motor caravans equal to or less than 13,5 m² plan area

Each exterior door opening to the habitation area shall have a minimum clear height of 1 140 mm and a minimum clear width of 480 mm and corners of maximum radius of 90 mm.

There shall be a clear opening free from any obstruction of at least 0,65 m².

5.3.2 Securing doors

Each exterior door shall be fitted with a locking device capable of keeping it closed when subjected to all forces caused by movement of the motor caravan in normal traffic conditions.

Interior doors shall be capable of being kept in a fixed position, open or closed, in the above conditions.

5.3.3 Childproof locking systems

When an external door is fitted with a childproof lock, a notice shall be permanently fixed close to the lock. The notice shall read:

- “Ensure that the childproof lock is not activated when the motor caravan is parked off the public highway”.

5.3.4 Dead-locking systems

If a dead-locking system is fitted on the base vehicle, information shall be included in the user's handbook on how to operate the doors from the inside when the dead-locking system is activated.

5.4 Awning rails

Any awning rail shall permit the correct fitting of an awning complying with EN ISO 8936.

6 Internal equipment

6.1 Bunks

6.1.1 Mattress and/or upholstery

Bunks shall be provided with mattresses or be upholstered.

6.1.2 Clearance

6.1.2.1 Motor caravans above 13,5 m² plan area

The clear height over 2/3 of the surface of the bunk shall be not less than 500 mm when measured from the compressed surface of the mattress or upholstery in accordance with the test in Annex D.

prEN 1646-1:2017 (E)**6.1.2.2 Motor caravans equal to or below 13,5 m² plan area**

The clear height over half the surface area of the bunk shall be not less than 400 mm when measured from the compressed surface of the mattress or upholstery in accordance with the test in Annex D.

6.1.3 Protection against falling out**6.1.3.1 General**

High level bunks shall be protected on all sides to prevent the occupant from falling out. Any gap between one element of protection and another shall conform to 6.1.7. However, no gap shall exceed 75 mm.

All protections shall be secured against unintentional loosening.

High level bunks shall be provided with a label with the following wording:

“Not suitable for children under 6 years old without supervision”.

6.1.3.2 Rigid protection

For rigid protection, the minimum height of the protection shall be at least 150 mm above the uncompressed upper surface of the mattress or upholstery. To allow entry, an access gap of 350 mm to 550 mm measured at its narrowest point shall be provided.

Where a rigid protection presents an apparent flexibility, its resistance shall be tested in accordance with Annex E.

A protection is considered as rigid if it is not bent more than 10 mm under a force of 100 N applied horizontally in the middle of the protection.

6.1.3.3 Protection by curtains or nets

Alternatively, the protection may be obtained by means of curtains or nets. The minimum height of the protection shall be at least 160 mm above the uncompressed upper surface of the mattress or upholstery, when the upper edge is loaded with 100 N in a vertical direction downward.

To allow access to the bunk, the curtains or nets on at least one side of the bunk may be detachable allowing an opening 350 mm to 550 mm.

Means of emergency exit from the bunk shall be accessible from the upper surface of the bunk.

The curtains or nets shall be capable of resisting a force of 100 N applied horizontally towards the outside of the bunk for 15 s to any point and this shall not result in any tearing nor detaching nor creating any gap larger than 60 mm at the lower edge of the protection.

The strength of the curtains or nets shall be tested in accordance with Annex E.

Any gap created during the resistance test shall be measured in accordance with Annex I.

6.1.4 Mechanical strength

A force of 1 000 N applied vertically downwards, for 1 h, from the midpoint of each side member of any bunk where the upper surface of the compressed mattress or upholstery is placed at a height of more than 500 mm from the floor, shall neither cause permanent deformation of more than 5 mm of the frame of the bunk nor damage the fixing of the bunk to the structure of the motor caravan.

The mechanical strength shall be tested in accordance with Annex F.

6.1.5 Security of folding bunks

If a bunk is designed to fold away, it shall be secured against unintentional folding away.