

ETSI TS 103 825 v1.1.1 (2022-09)



Emergency Communications (EMTEL); Testing - Conformance test specifications for Advanced Mobile Location; Test Purposes (TP) for the handsets

[ETSI TS 103 825 V1.1.1 \(2022-09\)](#)

<https://standards.iteh.ai/catalog/standards/sist/586cdb33-e2c2-42b2-90da-b9605556d225/etsi-ts-103-825-v1-1-1-2022-09>

Reference
DTS/EMTEL-0062
Keywords
PIXIT, SMS, TTCN

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at
<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://standards.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:
<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

Contents

Intellectual Property Rights	4
Foreword.....	4
Modal verbs terminology.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Definition of terms, symbols and abbreviations.....	5
3.1 Terms.....	5
3.2 Symbols.....	5
3.3 Abbreviations	6
4 Prerequisites and Test Configurations.....	6
4.1 Test Configurations	6
4.2 Protocol Implementation Conformance Statement (PICS).....	7
4.3 Protocol Implementation eXtra Information for Testing (PIXIT)	7
5 Test Suite Structure (TSS).....	7
5.1 Overview	7
5.2 Test groups specifications	8
5.3 Conventions.....	8
6 AML Test Purposes.....	8
6.1 SMS Transmission	8
6.2 HTTPS Transmission	11
Annex A (informative): Information on the tools to generate the present document	14
History	15

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the **GSM** logo are trademarks registered and owned by the **GSM Association**.

Foreword

(standards.iteh.ai)

This Technical Specification (TS) has been produced by ETSI Special Committee Emergency Communications (EMTEL). <https://standards.iteh.ai/catalog/standards/sist/586cdb33-e2c2-42b2-90da-b9605556d225/etsi-ts-103-825-v1-1-1-2022-09>

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document provides the Test Purposes (TP) for Development of AML Test Descriptions for handsets as defined in the ETSI AML specification ETSI TS 103 625 [1] listed in clause 2.1 of the present document.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 103 625 (V1.2.1): "Emergency Communications (EMTEL); Transporting Handset Location to PSAPs for Emergency Communications - Advanced Mobile Location".
- [2] ETSI ES 203 119-4 (V1.4.1): "Methods for Testing and Specification (MTS); The Test Description Language (TDL); Part 4: Structured Test Objective Specification (Extension)".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ISO/IEC 9646-1 (1994): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 1: General concepts".
- [i.2] ISO/IEC 9646-7 (1995): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 7: Implementation Conformance Statements".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ISO/IEC 9646-1 [i.1] and ISO/IEC 9646-7 [i.2] apply.

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AML	Advanced Mobile Location
ATS	Abstract Test Suite
BV	Valid Behaviour
HTTP	HyperText Transfer Protocol
HTTPS	HTTP Secure
ID	Identity
IDE	Integrated Development Environment
IFS	Interoperable Functions Statement
IMEI	International Mobile Equipment Identity
IUT	Implementation Under Test
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
SIM	Subscriber Identity Module
SMS	Short Message Service
TDL	Test Description Language
TDL-TO	TDL-Test Objective
TOP	TDL Open Source Project
TP	Test Purposes
TS	Test Suite
TSS	Test Suite Structure

4 Prerequisites and Test Configurations (standards.iteh.ai)

4.1 Test Configurations

Test configurations capture and describe the components identified in the tests and the connections between them. For the present test suite, two (2) configurations are identified and listed in the present clause. For each test configuration two (2) main components are identified: the IUT implementing the AML specification and the Tester implementing the AML endpoint.

Figure 4.1-1 includes a Handset as the IUT and a SMS Endpoint as the Tester. This configuration is applicable for all test purposes in SMS Group.

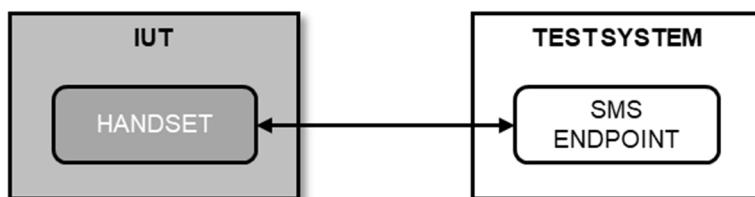


Figure 4.1-1: Config_SMS

Figure 4.1-2 includes a Handset as the IUT and a HTTPS Endpoint as the Tester. This configuration is applicable for all test purposes in HTTP Group.

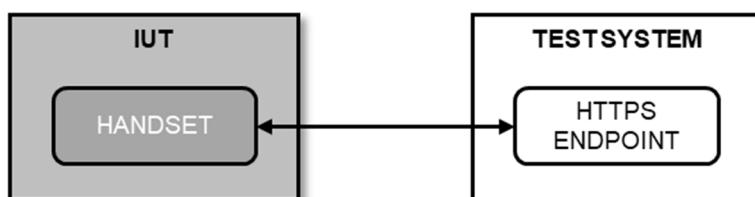


Figure 4.1-2: Config_HTTPS

NOTE: The AML HTTPS endpoint is configurable and differs from country to country where AML is used. The IUT should be able to verify the server certificate to test over HTTPS. There are the following options for this: use a server certificate signed by a trusted root certificate or use a self-signed certificate and import this certificate into the IUT.

4.2 Protocol Implementation Conformance Statement (PICS)

The "Protocol Implementation Conformance Statement" (PICS) identifies the standardized functions of an IUT. These functions can be mandatory, optional or conditional (depending on other functions), and depend on the role played by the IUT. The PICS can also be used as a proforma by a vendor to identify the functions that its IUT will support when interoperating with corresponding functions from other vendors.

Table 4.2-1: PICS

Item	IFS ID	Description	Status
1	PICS_SMS_SUPPORT	IUT supports AML via SMS	Optional. See note.
2	PICS_HTTPS_SUPPORT	IUT supports AML via HTTPS	Optional. See note.

NOTE: At least one of the options shall be selected.

4.3 Protocol Implementation eXtra Information for Testing (PIXIT)

The "Protocol Implementation eXtra Information for Testing" (PIXIT) defines the actual value and format of optional information elements according to the specifications implemented in the IUT.

Table 4.3-1: PIXIT

Item	PIXIT ID	Description
1	PX_LATITUDE	The WGS84 latitude of the centre of the location area given in decimal degrees using 5 decimal places giving resolution to 1,1 meters
2	PX_LONGITUDE	The WGS84 longitude of the centre of the location area given in decimal degrees using 5 decimal places giving resolution to 1,1 meters
3	PX_IMSI	The SIM card identifier of the IUT
4	PX_IMEI	The identifier of the IUT
5	PX_MCC	Mobile Country Code of the IUT
6	PX_MNC	Mobile Network Code of the IUT

5 Test Suite Structure (TSS)

5.1 Overview

The test suite structure identifies grouping of test purposes and serves a base for grouping of Test Case in the ATS (Abstract Test Suite).

The Test Suite structure is used for the creation of identifiers of Test Purposes.

Table 5.1-1 identifies the Test Suite Structure for the AML Conformance test suites. Documentation on the groups is provided in clause 5.2.

Table 5.1-1: Test Suite Structure for AML Conformance

TP_<root>_<gr>_<xx>_<nn>		
<root> = root	AML	AML
<gr> = group	SMS	AML via SMS
	HTTPS	AML via HTTPS
<xx> = type of testing	BV	Valid/Successful behaviour
<nn> = sequential number		01 to 99

5.2 Test groups specifications

The groups identify the different transport mechanisms of the AML data. Moreover, test purposes are identified and categorized by a sequential two-digits number (uniquely assigned upon definition of each test purpose) and by the type of test performed. The type of test helps quickly identify the type of behaviour that is expected by the IUT in the test purpose.

5.3 Conventions

The test purposes are primarily developed in textual syntax of TDL-TO, where the Initial Conditions and Expected Behaviour of each Test Purpose is written and shall be interpreted using the TDL-TO notation as defined in ETSI ES 203 119-4 (V1.4.1) [2]. The sources for the Test Purposes are available in https://forge.etsi.org/rep/emtel/NG112-/tree/ttf_t009/test_purposes/aml.

The definitions of PICS, Entities and Events are available in Domain section in the aml-common.tplan2 file. The definitions of PIXITS and data types are available in Data section in the aml-common.tplan2 file.

6 AML Test Purposes

6.1 SMS Transmission

TP Id	TP_AML_SMS_BV_01
Test Objective	Verify that the IUT automatically sends AML via SMS when an emergency call is initiated
Reference	ETSI TS 103 625 (V1.2.1) [1], clause 5.2, paragraph 2
PICS Selection	PICS_SMS_SUPPORT
Initial Conditions	
with { } the IUT is configured to the SMS_ENDPOINT entity }	
Expected Behaviour	
ensure that { when { the IUT initiates an emergency call } then { the IUT sends an AML_SMS_MESSAGE to the SMS_ENDPOINT entity } }	

TP Id	TP_AML_SMS_BV_02
Test Objective	Verify that the IUT automatically sends AML via SMS when an emergency SMS is sent
Reference	ETSI TS 103 625 (V1.2.1) [1], clause 5.2, paragraph 3
PICS Selection	PICS_SMS_SUPPORT
Initial Conditions	
with { } the IUT is configured to the SMS_ENDPOINT entity }	
Expected Behaviour	
ensure that { when { the IUT initiates an emergency sms } then { the IUT sends an AML_SMS_MESSAGE to the SMS_ENDPOINT entity } }	

TP Id	TP_AML_SMS_BV_03
Test Objective	Verify the SMS format and values of the AML SMS message
Reference	ETSI TS 103 625 (V1.2.1) [1], Annex A, table A.1
PICS Selection	PICS_SMS_SUPPORT
Initial Conditions	
with { the IUT is configured to the SMS_ENDPOINT entity and the IUT determines a Location containing latitude indicating value close_to PX_LATITUDE, longitude indicating value close_to PX_LONGITUDE }	
Expected Behaviour	
ensure that { when { the IUT initiates an emergency call } then { the IUT sends an AML_SMS_MESSAGE containing User_Data containing "A\"ML" indicating value AML_VERSION, "lt" indicating value close_to PX_LATITUDE, "lg" indicating value close_to PX_LONGITUDE, "rd" containing Number indicating value "the radius of the location area in meters", "top" containing UTCString indicating value "when the location was determined", "lc" containing Number indicating value "the level of confidence", "pm" indicating value "'G' 'W' 'C'", "si" containing PartialImsi derived from PX_IMSI;, "ei" containing PartialImei derived from PX_IMEI;, "mcc" corresponding to PX_MCC, "mnc" corresponding to PX_MNC, "ml" derived from the value of AML_SMS_MESSAGE to the SMS_ENDPOINT entity } }	
NOTE 1: For privacy reasons, a partial IMEI may be provided, specifically when only SMS transport is used. A completed IMEI is provided if multiple transport methods are used.	
NOTE 2: The notation A\"ML is used above instead of A"ML (as defined in ETSI TS 103 625 [1]) due to character escape requirements in TDL-T0.	

TP Id	TP_AML_SMS_BV_04
Test Objective	Verify that the IUT sends AML via SMS within the timeout T1
Reference	ETSI TS 103 625 (V1.2.1) [1], clause 5.1, paragraph 1-2
PICS Selection	PICS_SMS_SUPPORT
Initial Conditions	
with { } the IUT is configured to the SMS_ENDPOINT entity and the IUT is configured the timeout T1 } }	
Expected Behaviour	
ensure that { when { the IUT initiates an emergency call } then { the IUT sends an AML_SMS_MESSAGE "within" timeout T1 to the SMS_ENDPOINT entity } }	

TP Id	TP_AML_SMS_BV_05
Test Objective	Verify the SMS format and values of the AML message when no location can be determined
Reference	ETSI TS 103 625 (V1.2.1) [1], Annex A, table A.1
PICS Selection	PICS_SMS_SUPPORT
Initial Conditions	
with { } the IUT is configured to the SMS_ENDPOINT entity and the IUT not determines a Location } }	
Expected Behaviour	
ensure that { when { the IUT initiates an emergency call } then { the IUT sends an AML_SMS_MESSAGE containing User_Data containing "A\"ML" indicating value AML_VERSION, "lt" set to '+00.00000', t586cdb33-e2c2-42b2-90da- "lg" set to '+000.00000', "rd" set to 'N', "top" containing UTCString indicating value "when location process was deemed to have failed", "lc" set to 0, "pm" set to 'N', "si" containing PartialImsi derived from PX_IMSI;, "ei" containing PartialImei derived from PX_IMEI;, "mcc" set to PX_MCC, "mnc" set to PX_MNC, "ml" derived from the value of AML_SMS_MESSAGE to the SMS_ENDPOINT entity } } }	
NOTE 1: For privacy reasons, a partial IMEI may be provided, specifically when only SMS transport is used.	
NOTE 2: The notation A\"ML is used above instead of A"ML (as defined in ETSI TS 103 625 [1]) due to character escape requirements in TDL-TO.	