
Aeronavtika - Vijak, 100° ugrezna glava, spiralna vdolbina, ozka toleranca, kratek navoj, iz titanove zlitine, prevlečene z aluminijem IVD - Klasifikacija: 1 100 MPa (pri temperaturi okolice)/425 °C

Aerospace series - Screw, 100° countersunk normal head, Spiral Drive Recess, close tolerance normal shank, short thread, in titanium alloy, aluminium IVD coated - Classification: 1 100 MPa (at ambient temperature)/425 °C

Luft- und Raumfahrt - 100° Senkschraube mit Spiral Antrieb, enge Schafttoleranz, kurzes Gewinde, aus Titanlegierung, Aluminium IVD beschichtet - Klasse: 1 100 MPa (bei Raumtemperatur)/425 °C

Série aérospatiale - Vis à tête fraisée normale 100°, empreinte en spirale, tige normale à tolérance large, filetage court, en alliage de titane, revêtue d'aluminium IVD - Classification : 1 100 MPa (à température ambiante)/425 °C

Ta slovenski standard je istoveten z: EN 4849:2022

ICS:

49.025.20	Aluminij	Aluminium
49.030.20	Sorniki, vijaki, stebelni vijaki	Bolts, screws, studs

SIST EN 4849:2022

en,fr,de

**iTeh STANDARD
PREVIEW
(standards.iteh.ai)**

[SIST EN 4849:2022](#)

<https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022>

EUROPEAN STANDARD

EN 4849

NORME EUROPÉENNE

EUROPÄISCHE NORM

March 2022

ICS 49.030.20

English Version

**Aerospace series - Screw, 100° countersunk normal head,
Spiral Drive Recess, close tolerance normal shank, short
thread, in titanium alloy, aluminium IVD coated -
Classification: 1 100 MPa (at ambient temperature)/425
°C**

Série aérospatiale - Vis à tête fraisée normale 100°,
empreinte en spirale, tige normale à tolérance large,
filetage court, en alliage de titane, revêtue d'aluminium
IVD - Classification : 1 100 MPa (à température
ambiante)/425 °C

Luft- und Raumfahrt - 100° Senkschraube mit Spiral
Antrieb, enge Schafttoleranz, kurzes Gewinde, aus
Titanlegierung, Aluminium IVD beschichtet - Klasse: 1
100 MPa (bei Raumtemperatur)/425 °C

This European Standard was approved by CEN on 10 January 2022.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
European foreword	3
Introduction	4
1 Scope.....	5
2 Normative references.....	5
3 Terms and definitions.....	6
4 Requirements.....	6
4.1 Configuration — Dimensions — Masses.....	6
4.2 Tolerances of form and position	10
4.3 Materials	10
4.4 Surface treatment.....	10
4.5 Lubrication.....	10
5 Designation	10
6 Marking	10
7 Technical specification	11
8 Oversize bolts.....	11
Bibliography.....	12

iTech STANDARD
PREVIEW
(standards.iteh.ai)

[SIST EN 4849:2022
https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022](https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022)

European foreword

This document (EN 4849:2022) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by September 2022, and conflicting national standards shall be withdrawn at the latest by September 2022.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

iTeh STANDARD
PREVIEW
(standards.iteh.ai)

[SIST EN 4849:2022](https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022)

<https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022>

EN 4849:2022 (E)

Introduction

Aerospace and Defence Standardisation (ASD-STAN) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent “Spiral Drive System for Threaded Fasteners” EP1025370B1.

ASD-STAN takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured ASD-STAN that he/she is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ASD-STAN. Information may be obtained from:

Phillips Screw Company
301 Edgewater Drive, Suite 320
Wakefield, Massachusetts 01880
USA

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ASD-STAN shall not be held responsible for identifying any or all such patent rights.

**iTeh STANDARD
PREVIEW
(standards.iteh.ai)**

[SIST EN 4849:2022](https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022)
<https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022>

1 Scope

This document specifies the characteristics of externally threaded fasteners, 100° countersunk normal head, Spiral Drive Recess, close tolerance normal shank, short thread, in titanium alloy, aluminium IVD coated, for aerospace applications.

Classification: 1 100 MPa¹/425 °C²

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2424, *Aerospace series — Marking of aerospace products*

EN 3813, *Aerospace series — Titanium alloy TI-P64001 (Ti-6Al-4V) — Annealed — Bar and wire for forged fasteners — De ≤ 50 mm*

EN 4016, *Aerospace series — Oversized bolts*³

EN 4609, *Aerospace series — Spiral drive recesses for threaded fasteners — Geometrical definition and technical requirements*

EN 6117, *Aerospace series — Specification for lubrication of fasteners with cetyl alcohol*³

EN 6118, *Aerospace series — Process specification — Aluminium base protection for fasteners*³

ISO 3353-1, *Aerospace — Lead and runout threads — Part 1: Rolled external threads*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts*

ISO 7913, *Aerospace — Bolts and screws, metric — Tolerances of form and position*

ISO 9152, *Aerospace — Bolts with MJ threads, in titanium alloys, strength class 1 100 MPa — Procurement specification*

MIL-DTL-5541, *Chemical Conversion Coatings on Aluminum and Aluminum Alloys*⁴

¹ Minimum tensile strength of the material at ambient temperature.

² Maximum temperature that the externally threaded fastener can withstand without continuous change in its original characteristics, after return to ambient temperature. The maximum temperature is determined by the material.

³ Published as ASD-STAN Prestandard at the date of publication of this standard by AeroSpace and Defence Industries Association of Europe – Standardization (ASD-STAN) (www.asd-stan.org).

⁴ Published by: Department of Defense (DoD), The Pentagon, Washington, D.C. 20301, USA.

EN 4849:2022 (E)**3 Terms and definitions**

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Requirements**4.1 Configuration — Dimensions — Masses**

See Figure 1 and Table 1.

Dimensions and tolerances are expressed in millimetres and apply after surface treatment.

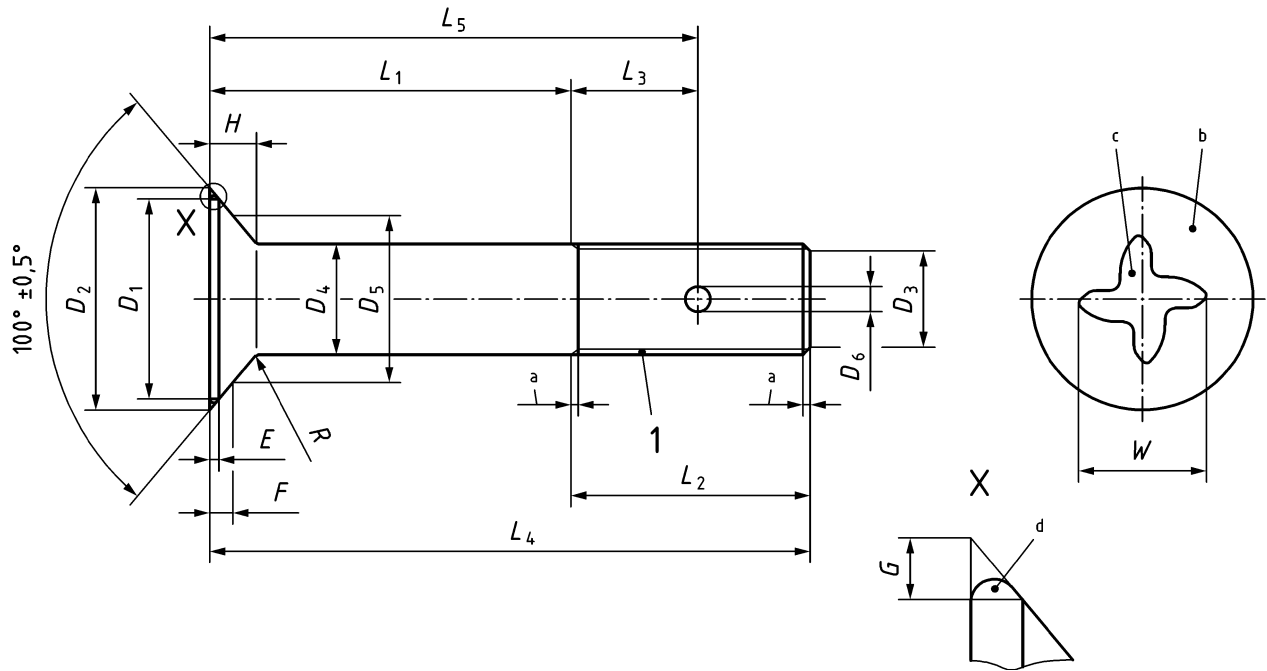
Roughness shall be as follows:

- bearing surfaces (underhead face, fillet radius, shank, thread): $R_{\text{amax}} = 0,8 \mu\text{m}$;
- all other surfaces: $R_{\text{amax}} = 3,2 \mu\text{m}$;
- break sharp edges 0,1 to 0,4.

**iTeh STANDARD
PREVIEW
(standards.iteh.ai)**

[SIST EN 4849:2022](https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022)

<https://standards.iteh.ai/catalog/standards/sist/11490160-64f4-450d-8465-27ace56724ce/sist-en-4849-2022>

**Key**

- 1 Thread
- a According to ISO 3353-1
- b Marking
- c MORTORQ® Spiral Drive Recess⁵
- d Rounded form permitted

NOTE Dimensions not specified are at the manufacturer's option provided that the qualification and acceptance requirements of EN 4609 and technical specification are met.

SIST EN 4849:2022

Figure 1 — Externally threaded fastener, 100° countersunk head

<https://standards.iteh.ai/catalog/standards/sist-en-4849-2022/64f4-450d-8465-27ace56724ce/sist-en-4849-2022>

⁵ MORTORQ® is the trade name of a product supplied by licensees of the Phillips Screw Company. This information is given for the convenience of users of this document and does not constitute an endorsement by ASD-STAN nor CEN of the product named. Equivalent products may be used if they can be shown to lead to the same results.

Table 1 — Dimensions and masses

Diameter code	Thread ^a	D ₁	D ₂	D ₃		D ₄		D ₅	D ₆	E	F	G	H	L ₁ ± 0,2 ^{b,c}		L ₂	L ₃	Recess Code	W	Gauge Penetration		R		Mass ^d			
		min.	max.	nom.	Tol.	nom.	Tol.		H13	min.	0 -0,08				Length Code	nom.				ref	max.	min.	nom.	Tol.	e	f	
030	MJ3 × 0,5 4h6h	5,4	6	2,3	0 -0,05	3	-0,006 -0,031	4,50	—	0,06	0,63	0,3	1,27	003 to 030	3 to 30	6,0	—	00	3,07	0,56	0,33	0,4		0,31	0,03		
040	MJ4 × 0,7 4h6h	7,2	8	3,0		4		5,78	1,1	0,08	0,93	0,4	1,69	003 to 040	3 to 40	7,5	5,0	0	4,33	0,81	0,58			0,64	0,06		
050	MJ5 × 0,8 4h6h	9,0	10	3,4	±0,5	5	-0,010 -0,035	7,71	1,5	0,1	0,96	0,5	2,12	004 to 050	4 to 50	9,0	6,0	1	6,11	0,69	0,51	0,5		1,26	0,09		
060	MJ6 × 1 4h6h	10,8	12	4,2		6		9,00				1,26	2,54	005 to 060	5 to 60	10,0			1	6,11	1,19	0,97			2,12	0,13	
070	MJ7 × 1 4h6h	12,8	14	5,2		7		10,28			1,57	2,96	006 to 070	6 to 70	11,0	7,0		2	7,82	1,27	1,04	0,7			3,32	0,17	
080	MJ8 × 1 4h6h	14,8	16	6,2		8		12,21			1,90	3,39	006 to 080	6 to 80	11,5	7,5		2	7,82	1,57	1,35				4,39	0,23	
100	MJ10 × 1,25 4h6h	18,8	20	7,9		10		15,43			2,4	1,93	0,6	4,23	008 to 100	8 to 100	14,5	9,0	3	8,98	1,83	1,45	0,8			9,23	0,34
120	MJ12 × 1,25 4h6h	22,8	24	9,8		12		18,00				2,53		5,08	010 to 120	10 to 120	16,5	10,0	5	12,86	2,08	1,70	0,9			15,68	0,51
140	MJ14 × 1,5 4h6h	26,8	28	11,5		14		20,57				3,14		5,93	010 to 140	10 to 140	19,0	12,0	5	12,86	2,59	1,96	1,1			23,26	0,68
160	MJ16 × 1,5 4h6h	30,8	32	13,5		16		24,43				3,20		6,77	010 to 160	10 to 160	20,5	12,5	6	15,08	2,79	2,16					33,63