



Standard Test Method for Wear Preventive Characteristics of Lubricating Grease (Four-Ball Method)¹

This standard is issued under the fixed designation D 2266; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

This test method standard has been ~~adopted~~ approved for use by government agencies to replace Method 6514 of the Department of Federal Test Method Standard No. 791b. Defense.

1. Scope

1.1 This test method covers the determination of the wear preventive characteristics of greases in sliding steel-on-steel applications. It is not intended to predict wear characteristics with metal combinations other than steel-on-steel or to evaluate the extreme pressure characteristics of the grease.

~~1.2 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.~~

1.2 The values stated in SI units are to be regarded as the standard except where the test apparatus or consumable parts are only available in other units. In such cases, these will be regarded as standard. The values given in parentheses are for information only.

1.3 *This standard does not purport to address all of the safety problems, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use. For specific hazard statement see 7.2, 7.3, and 9.1.*

2. Referenced Documents

2.1 ASTM Standards:²

~~D235 Specification for Mineral Spirits (Petroleum Spirits) (Hydrocarbon Dry-Cleaning Solvent) 4172 Test Method for Wear Preventive Characteristics of Lubricating Fluid (Four-Ball Method)~~

D 6300 Practice for Determination of Precision and Bias Data for Use in Test Methods for Petroleum Products and Lubricants

2.2 Other Document:

~~ANSI Specifications B3.12 for Metal Balls ANSI Standard:³~~

B3.12 for Metal Balls

3. Terminology

~~3.1 There are no terms in this standard test method that require new or other than dictionary definitions.~~

4. Summary of Test Method

~~4.1 A steel ball is rotated under load against three stationary steel balls having grease-lubricated surfaces. The diameters of the wear scars on the stationary balls are measured after completion of the test.~~

4.1 Three ½ in. (12.7-mm) diameter steel balls are clamped together and covered with the lubricant to be evaluated. A fourth ½ in. diameter steel ball, referred to as the top ball, is pressed with a force of 40 kgf (392 N) into the cavity formed by the three clamped balls for three-point contact. The temperature of the lubricating grease specimen is regulated at 75°C (167°F) and then the top ball is rotated at 1200 rpm for 60 min. Lubricants are compared by using the average size of the scar diameters worn on the three lower clamped balls.

NOTE 1—Because of differences in the construction of the various machines on which the four-ball test can be made, the manufacturer's instructions

¹ This test method is under the jurisdiction of ASTM Committee D-2 on Petroleum Products and Lubricants and is the direct responsibility of Subcommittee D02.G on Lubricating Grease.

Current edition approved Sept. 15, 1991. Published November 1991. Originally published as D2266-64T. Last previous edition D2266-86.

² This test method is under the jurisdiction of ASTM Committee D02 on Petroleum Products and Lubricants and is the direct responsibility of Subcommittee D02.G0.04 on Functional Tests - Tribology.

Current edition approved May 1, 2008. Published September 2008. Originally approved in 1964. Last previous edition approved in 2001 as D 2266-01.

This test method has been adopted for use by government agencies to replace Method 6514 of Federal Test Method Standard No. 791b.

³ For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* Vol 06.04, volume information, refer to the standard's Document Summary page on the ASTM website.

⁴ Available from American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036.

⁵ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org>.

should be consulted for proper machine setup and operation.

NOTE 2—Although the test can be run under other test parameters, the precision noted in Section 11 can vary when testing with other than test parameters listed in Section 8.

5. Significance and Use

5.1 The four-ball wear-test method can be used to determine the relative wear-preventing properties of greases under the test conditions and if the test conditions are changed the relative ratings may be different. No correlation has been established between the four-ball wear test and field service. The test method cannot be used to differentiate between Extreme Pressure (EP) and Non-Extreme Pressure (Non-EP) Greases.⁴

6. Apparatus

6.1 *Four-Ball Wear-Tester and Accessories*—See Fig. 1 and Fig. 2.⁵

NOTE 1—It is important to distinguish between the Four-Ball EP Tester and the Four-Ball Wear Tester. The Four-Ball Wear Tester can be used under a variety of test conditions at loads up to 50 kgf. The Four-Ball EP Tester is designed for testing under more severe conditions and lacks the sensitivity necessary for the four-ball wear test. 3—It is important to distinguish between the Four-Ball EP Tester and the Four-Ball Wear Tester. The Four-Ball EP Tester is designed for testing under heavier loads and more severe conditions; it lacks the sensitivity necessary for performing four-ball wear test.

6.2 *Microscope*,⁶ capable of measuring the diameters of the scars produced on the three stationary balls to an accuracy of 0.01 mm. It is more efficient to measure the scars without removing the three balls from the holder.

7. Reagents and Materials

7.1 *Test Balls*—Test balls shall be⁷, chrome alloy steel, made from AISI standard steel No. E-52100, with diameter of ± 2.7 mm (± 0.5 in.; 0.5 in. (12.7 mm), Grade 25 EP (Extra Polish). Such balls are described in ANSI Specifications B3.12; B 3.12, for Metal Balls. The Extra-Polish finish is not described in that specification. The Rockwell C hardness shall be 64 to 66, a closer limit than is found in the ANSI requirement.

iTeh Standards

⁴ Further details on this test method may be found in: Stallings, L., et al.,

⁴ Further details on this test method may be found in the article by Stallings, L., *NLGI Spokesman*, Vol 31, No. 11, February 1968, pp. 396–401, Vol 31, No. 11, February 1988, pp. 396–401. This article has been submitted as a research report, but it does not follow research report guidelines because the work was conducted before research report guidelines were instituted.

⁵ The Four-Ball Wear Tester, available from Falex Corp., 2055 Comprehensive Drive, Aurora, IL 60505, has been found suitable for this purpose.

⁵ The sole source of supply of the Four-Ball Wear Test Machine known to the committee at this time is Falex Corp., 1020 Airpark Drive, Sugar Grove, IL 60554. If you are aware of alternative suppliers, please provide this information to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend.

This company can also furnish a microscope with a special base to measure the wear scars without removing the balls from the test-oil cup. Discontinued models of the Four-Ball Wear Test Machine made by Precision Scientific Co. and Roxanna Machine Works are also satisfactory.

⁶ Described in the *Annual Book of ASTM Standards*, Vol 05.04, Test Methods for Rating Motor Diesel and Aviation Fuels, Annex 2, Section A2.7 Reference Materials.

⁶ The sole source of supply of the microscope known to the committee at this time is Falex Corp., 1020 Airpark Drive, Sugar Grove, IL 60554. If you are aware of alternative suppliers, please provide this information to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend.

Falex Corp. Microscope F-1519-31 measures directly to 0.1 mm and by interpolation to 0.01 mm. A higher resolution version, F-1519-31A, measures to 0.001 mm.

⁷ Falex Corp. Microscope F-1519-2 has been found suitable for this purpose. F-1519-2 measures to 0.1 mm directly to 0.01 mm by interpolation. A higher resolution version, F-1519-2A, measures to 0.01 mm.

⁷ Steel balls meeting this description were used in developing the precision of the test. They are available from the manufacturer of the test machine and some ball manufacturers. Some operators prefer to check a new box of balls by running an oil or a lubricating grease with a known reference. All balls used in one test should be taken from one carton (of 500 balls) as received from the supplier.

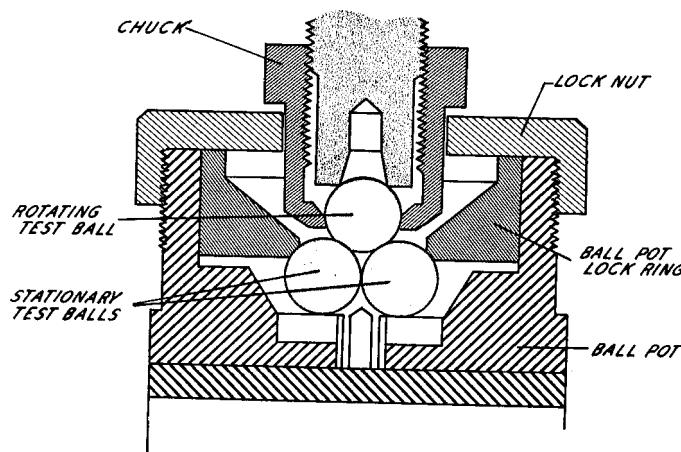


FIG. 1 Precision Scientific Company Four-Ball Test Arrangement