# INTERNATIONAL STANDARD

ISO 1718

Second edition 1991-01-15

## Rock drilling equipment — Drill rods with tapered connection for percussive drilling

iTeh SMatériel de forage des roches V Fleurets à raccord conique pour forage percutant (standards.iteh.ai)

ISO 1718:1991 https://standards.iteh.ai/catalog/standards/sist/b20c46fd-6c1b-4a7b-8609-3cbbc95cbf9e/iso-1718-1991

 $IMI \vdash HMDIH IMDI$ 

151



#### Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

International Standard ISO 1718 was prepared by Technical Committee ISO/TC 82, Mining.

This second edition cancels and replaces the first edition of SO 1718: 1974), which has been technically revised (addition of Sizes 7°  $\times$  25 and 6c1b-4a7b-8609-12°  $\times$  25, amendments of lengths and deletion of tapered bits and thimbles).

© ISO 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

### Rock drilling equipment — Drill rods with tapered connection for percussive drilling

#### Scope

This International Standard specifies the basic dimensions of drill rods with tapered connection for percussive drilling and the necessary dimensions of the tapered connections.

registers of currently valid International Standards. ISO 722:1990, Rock drilling equipment — Hollow drill

plying the most recent editions of the standards in-

dicated below. Members of IEC and ISO maintain

steels in bar form, hexagonal and round.

ISO 723:1990, Rock drilling equipment - Forged collared shanks and corresponding chuck bushings for hollow hexagonal drill steels.

#### 2 Normative references i Feh STANDARI

The following standards contain provisions which, through reference in this text, constitute provisions as 13e Dimensions of this International Standard. At the time of publidards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of ap-

cation, the editions indicated were valid. All stan 718:199 The dimensions of the tapered drill rods and the tapered connections shall comply with those given in figure 1 and table 1 and in figure 2 and table 2, respectively.

#### 3.1 Tapered drill rods





Figure 1

Table 1

Dimensions in millimetres

Nominal size of hexagonal drill steel	L			
	610			
22	1 220			
	1 830			
iTeh STANDARD	PRE440 IEW			
(standards.ite	3 050 h 3 2001)			
25	3 6601)			
<u>ISO 1718:1991</u>	3 9651)			
https://standards.iteh.ai/catalog/standards/sist/b20c46fd-6c1b-4a7l				
1) Drill rods of length 3 200 mm 3 660 mm and 3 965 mm are mainly intended for size 25.				

#### 3.2 Tapers

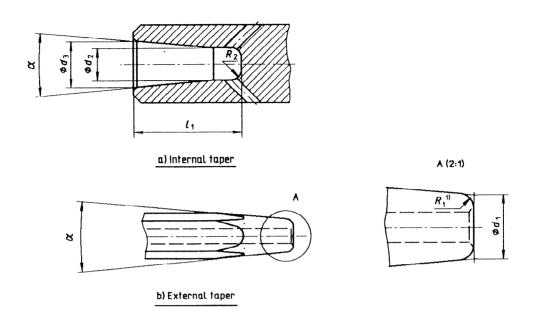

## 1) The taper end is allowed to be chamfered within the limits of Roll (standar Figure 12 h.ai)

ISO 1718:1991 https://standards.iteh.ai/catalog/standards/sist/b20c46fd-6c1b-4a7b-8609-3cbbc95cbf9e**Table**/1**8**-1991

Dimensions in millimetres

Designation	Taper angle α	a	<i>d</i> <sub>1</sub>		$d_2$		$d_3$		$R_1$	R,
	degrees	Size	Tolerance	Size	Tolerance	Size	Tolerance	min.		
4,8° × 22	4,8	19,1	0 0,2	19,3	+0,2	22	+0,2	51	1,5	6,3
7° × 22	7	16	0 0,2	16,2	+0,2	21,8	+ 0,2 0	54	6	6,3
12° × 22	12	14,9	0 0,2	15,4	+0,2	22	+0,2	48	6	6,3
7° × 25	7	19,7	0 -0,2	20	+0,2	24,4	+0,2	54	6	6,3
12° × 25	12	17,9	0 0,2	18,4	+0,2	25,1	+0,2	48	6	6,3

### iTeh STANDARD PREVIEW

Standards itch ain This page intentionally left blank

ISO 1718:1991 https://standards.iteh.ai/catalog/standards/sist/b20c46fd-6c1b-4a7b-8609-3cbbc95cbf9e/iso-1718-1991

### iTeh STANDARD PREVIEW

Standards itch This page intentionally left blank

ISO 1718:1991 https://standards.iteh.ai/catalog/standards/sist/b20c46fd-6c1b-4a7b-8609-3cbbc95cbf9e/iso-1718-1991

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 1718:1991 https://standards.iteh.ai/catalog/standards/sist/b20c46fd-6c1b-4a7b-8609-3cbbc95cbf9e/iso-1718-1991

#### UDC 622.233.5

Descriptors: mining equipment, drilling equipment, rock drills, percussion drilling, bore bits, shanks, dimensions.

Price based on 3 pages