



SLOVENSKI STANDARD
SIST EN 16603-31-02:2018

01-november-2018

Nadomešča:

SIST EN 16603-31-02:2015

Vesoljska tehnika - Oprema za dvofazni toplotni transport

Space engineering - Two-phase heat transport equipment

Raumfahrttechnik - Ausrüstung für Zwei-Phasen-Wärmetransport

Ingénierie spatiale - Equipements de transfert de chaleur à deux phases

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: EN 16603-31-02:2018

<https://standards.iteh.ai/catalog/standards/sist/03a945dc-610c-480c-8933-7712d4e36691/sist-en-16603-31-02-2018>

ICS:

49.140 Vesoljski sistemi in operacije Space systems and operations

SIST EN 16603-31-02:2018

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 16603-31-02:2018

<https://standards.iteh.ai/catalog/standards/sist/03a945dc-610c-480c-8933-7712d4e36691/sist-en-16603-31-02-2018>

EUROPEAN STANDARD

EN 16603-31-02

NORME EUROPÉENNE

EUROPÄISCHE NORM

September 2018

ICS 49.140

Supersedes EN 16603-31-02:2015

English version

Space engineering - Two-phase heat transport equipment

Ingénierie spatiale - Equipements de transfert de
chaleur à deux phasesRaumfahrttechnik - Ausrüstung für Zwei-Phasen-
Wärmetransport

This European Standard was approved by CEN on 11 July 2018.

CEN and CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN and CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN and CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN and CENELEC members are the national standards bodies and national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

[SIST EN 16603-31-02:2018](https://standards.iteh.ai/catalog/standards/sist/03a945dc-610c-480c-8933-7712d4e36691/sist-en-16603-31-02-2018)

<https://standards.iteh.ai/catalog/standards/sist/03a945dc-610c-480c-8933-7712d4e36691/sist-en-16603-31-02-2018>



**CEN-CENELEC Management Centre:
Rue de la Science 23, B-1040 Brussels**

Table of contents

| | |
|--|-----------|
| European Foreword | 5 |
| Introduction | 6 |
| 1 Scope | 7 |
| 2 Normative references | 8 |
| 3 Terms, definitions and abbreviated terms | 9 |
| 3.1 Terms defined in other standards | 9 |
| 3.2 Terms specific to the present standard | 10 |
| 3.3 Abbreviated terms..... | 13 |
| 4 TPHE verification principles | 15 |
| 4.1 TPHE categorization | 15 |
| 4.2 Involved organizations | 15 |
| 4.3 Generic requirements in this standard | 16 |
| 4.4 TPHE qualification principles | 17 |
| 4.4.1 Processes, number of qualification units | 17 |
| 4.4.2 Thermal and mechanical qualification | 17 |
| 4.5 TPHE acceptance principles..... | 21 |
| 5 Requirements for qualification activity | 22 |
| 5.1 Technical specification (TS)..... | 22 |
| 5.1.1 General | 22 |
| 5.1.2 Requirements to the TS | 22 |
| 5.1.3 Requirements for formulating technical requirements..... | 23 |
| 5.2 Materials, parts and processes | 23 |
| 5.3 General qualification requirements | 24 |
| 5.3.1 Qualification process..... | 24 |
| 5.3.2 Supporting infrastructure – Tools and test equipment | 24 |
| 5.4 Qualification process selection | 24 |
| 5.5 Qualification stage | 26 |
| 5.5.1 Qualification requirements..... | 26 |
| 5.5.2 Quality audits | 27 |

| | | |
|----------|---|-----------|
| 5.5.3 | Qualification methods..... | 27 |
| 5.5.4 | Full and delta qualification programme..... | 29 |
| 5.5.5 | Performance requirements..... | 29 |
| 5.6 | Qualification test programme..... | 32 |
| 5.6.1 | Number of qualification units..... | 32 |
| 5.6.2 | Test sequence..... | 32 |
| 5.6.3 | Test requirements..... | 35 |
| 5.6.4 | Physical properties measurement..... | 38 |
| 5.6.5 | Proof pressure test..... | 39 |
| 5.6.6 | Pressure cycle test..... | 39 |
| 5.6.7 | Burst pressure test..... | 39 |
| 5.6.8 | Leak test..... | 40 |
| 5.6.9 | Thermal performance test..... | 41 |
| 5.6.10 | Mechanical tests..... | 43 |
| 5.6.11 | Thermal cycle test..... | 45 |
| 5.6.12 | Aging and life tests..... | 45 |
| 5.6.13 | Gas plug test..... | 46 |
| 5.6.14 | Reduced thermal performance test..... | 46 |
| 5.7 | Operating procedures..... | 47 |
| 5.8 | Storage..... | 47 |
| 5.9 | Documentation..... | 47 |
| 5.9.1 | Documentation summary..... | 47 |
| 5.9.2 | Specific documentation requirements..... | 47 |
| 6 | Requirements for acceptance activity..... | 50 |
| 6.1 | General..... | 50 |
| 6.2 | Acceptance process..... | 50 |
| 6.2.1 | Materials, parts and processes..... | 50 |
| 6.2.2 | General acceptance requirements..... | 50 |
| 6.2.3 | Supporting infrastructure – Tools and test equipment..... | 51 |
| 6.2.4 | Acceptance test programme..... | 51 |
| 6.2.5 | Operating procedures..... | 51 |
| 6.2.6 | Storage..... | 51 |
| 6.2.7 | Documentation..... | 52 |
| | Bibliography..... | 53 |

EN 16603-31-02:2018 (E)**Figures**

| | |
|---|----|
| Figure 3-1: Tilt definition for HP | 12 |
| Figure 3-2: Tilt definition for LHP | 12 |
| Figure 4-1: Categories of TPHTe (two-phase heat transport equipment) | 16 |
| Figure 4-2: Figure-of-merit (G) for some TPHTe fluids | 18 |
| Figure 4-3: Definition of temperature and performance ranges for a HP | 19 |
| Figure 5-1: Selection of qualification process | 26 |
| Figure 5-2: Qualification test sequence for HP | 33 |
| Figure 5-3: Qualification test sequence for CDL | 34 |

Tables

| | |
|---|----|
| Table 4-1: Examples of allowed design modifications for acceptance hardware | 21 |
| Table 5-1: Categories of two-phase heat transport equipment according to heritage (adapted from ECSS-E-ST-10-02C, Table 5-1) | 24 |
| Table 5-2: Allowable tolerances | 36 |
| Table 5-3: Measurement accuracy | 38 |
| Table 5-4: Equipment resonance search test levels | 44 |
| Table 5-5: Sinusoidal vibration qualification test levels | 44 |
| Table 5-6: Random vibration qualification test levels | 45 |
| Table 5-7: TPHTe documentation | 49 |

<https://standards.iteh.ai/catalog/standards/sist/03a945dc-610c-480c-8933-7712d4e36691/sist-en-16603-31-02-2018>

European Foreword

This document (EN 16603-31-02:2018) has been prepared by Technical Committee CEN-CENELEC/TC 5 "Space", the secretariat of which is held by DIN.

This standard (EN 16603-31-02:2018) originates from ECSS-E-ST-31-02C Rev.1.

This document supersedes EN 16603-31-02:2015.

The main changes with respect to EN 16603-31-02:2015 are listed below:

- Implementation of Change Requests
- Clause 3 Terms, definition and abbreviated terms" updated and Nomenclature added
- Titles of clauses 4, 5, 5.1, 5.5.1; updated
- Clause 4 updated to include TPHTe acceptance requirements in new clause 4.5 "TPHTe acceptance principles"
- Merge of former clauses 4.4 and 4.5 to new clause 4.4 "TPHTe qualification principles"
- DRDs in Annex A to H deleted. Requirements calling the DRDs updated to the DRD in the dedicated ECSS Standard

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2019, and conflicting national standards shall be withdrawn at the latest by March 2019.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a standardization request given to CEN by the European Commission and the European Free Trade Association.

This document has been developed to cover specifically space systems and has therefore precedence over any EN covering the same scope but with a wider domain of applicability (e.g. : aerospace).

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

This Standard replaces ESA PSS-49, Issue 2 “Heat pipe qualification requirements”, written in 1983, when the need for heat pipes in several ESA projects had been identified. At that time a number of European development activities were initiated to provide qualified heat pipes for these programmes, which culminated in a first heat pipe application on a European spacecraft in 1981 (MARECS, BR-200, ESA Achievements - More Than Thirty Years of Pioneering Space Activity, ESA November 30, 2001), followed by a first major application on a European communication satellite in 1987 (TV-SAT 1, German Communication Satellites).

ESA PSS-49 was published at a time, when knowledge of heat pipe technology started to evolve from work of a few laboratories in Europe (IKE, University Stuttgart, EURATOM Research Centre, Ispra). Several wick designs, material combinations and heat carrier fluids were investigated and many process related issues remained to be solved. From today’s view point the qualification requirements of ESA PSS-49 appear therefore very detailed, exhaustive and in some cases disproportionate in an effort to cover any not yet fully understood phenomena. As examples the specified number of qualification units (14), the number of required thermal cycles (800) and the extensive mechanical testing (50 g constant acceleration, high level sine and random vibration) can be cited.

The present Standard takes advantage of valid requirements of ESA PSS-49, but reflects at the same time today’s advanced knowledge of two-phase cooling technology, which can be found with European manufacturers. This includes experience to select proven material combinations, reliable wick and container designs, to apply well-established manufacturing and testing processes, and develop reliable analysis tools to predict in-orbit performance of flight hardware. The experience is also based on numerous successful two-phase cooling system applications in European spacecraft over the last 20 years.

Besides streamlining the ESA PSS-49, to arrive at today’s accepted set of heat pipe qualification requirements, the following features have also been taken into account:

- Extension of PSS-49 heat pipe qualification requirements to include heat pipe acceptance requirements;
- Inclusion of qualification and acceptance requirements for two-phase loops (CPL, LHP);
- Reference to applicable requirements in other ECSS documents;
- Formatting to recent ECSS template in order to produce a document, which can be used in business agreements between customer and supplier.

1 Scope

This standard defines qualification and acceptance requirements for two-phase heat transportation equipment (TPHTE), for use in spacecraft thermal control.

This standard is applicable to qualification and acceptance activities of new hardware.

However, acceptance requirements of this Standard can be used for existing hardware, which has been qualified previously to other requirements than listed herein.

Requirements for mechanical pump driven loops (MPDL) are not included in the present version of this Standard.

This standard also includes definitions and part of the requirements of ECSS-E-ST-32-02 applicable to TPHTE qualification and acceptance.

This standard may be tailored for the specific characteristics and constraints of a space project in conformance with ECSS-S-ST-00.

<https://standards.iteh.ai/catalog/standards/sist/03a945dc-610c-480c-8933-7712d4e36691/sist-en-16603-31-02-2018>

Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this ECSS Standard. For dated references, subsequent amendments to, or revision of any of these publications do not apply. However, parties to agreements based on this ECSS Standard are encouraged to investigate the possibility of applying the more recent editions of the normative documents indicated below. For undated references, the latest edition of the publication referred to applies.

| EN reference | Reference in text | Title |
|----------------|-------------------|--|
| EN 16601-00-01 | ECSS-S-ST-00-01 | ECSS system - Glossary of terms |
| EN 16603-10-02 | ECSS-E-ST-10-02 | Space engineering - Verification |
| EN 16603-10-03 | ECSS-E-ST-10-03 | Space engineering - Testing |
| EN 16603-10-06 | ECSS-E-ST-10-06 | Space engineering - Technical requirements specification |
| EN 16603-31 | ECSS-E-ST-31 | Space engineering - Thermal control general requirements |
| EN 16603-32 | ECSS-E-ST-32 | Space engineering - Structural general requirements |
| EN 16603-32-01 | ECSS-E-ST-32-01 | Space engineering- Fracture control |
| EN 16603-32-02 | ECSS-E-ST-32-02 | Space engineering - Structural design and verification of pressurized hardware |
| EN 16602-70 | ECSS-Q-ST-70 | Space product assurance - Materials, mechanical parts and processes |
| | EN 9100:2009 | Aerospace series - Quality management systems - Requirements for Aviation, Space and Defense Organizations |

Terms, definitions and abbreviated terms

3.1 Terms defined in other standards

- a. For the purpose of this Standard, the terms and definitions from ECSS-E-ST-00-01 apply, and in particular the following:
1. acceptance
 2. certification
 3. component
 4. customer
 5. equipment
 6. product assurance
 7. qualification
 8. supplier
- b. For the purpose of this standard, the following terms and definitions from ECSS-E-ST-10-02 apply:
1. acceptance stage
 2. analysis
 3. inspection
 4. qualification stage
 5. review-of-design (ROD)
 6. test
- c. For the purpose of this standard, the following terms and definitions from ECSS-E-ST-32-02 apply:
1. burst pressure
 2. internal pressure
 3. leak-before-burst (LBB)
 4. pressure vessel (PV)
 5. pressurized hardware (PH)
 6. proof test

3.2 Terms specific to the present standard

3.2.1 capillary driven loop (CDL)

TPL in which fluid circulation is accomplished by capillary action

NOTE See TPL definition in 3.2.21.

3.2.2 capillary pumped loop (CPL)

CDL with the fluid reservoir separated from the evaporator and without a capillary link to the evaporator

NOTE See CDL definition in 3.2.1.

3.2.3 constant conductance heat pipe (CCHP)

heat pipe with a fixed thermal conductance between evaporator and condenser at a given saturation temperature

NOTE See heat pipe definition in 3.2.7.

3.2.4 dry-out

depletion of liquid in the evaporator section at high heat input when the capillary pressure gain becomes lower than the pressure drop in the circulating fluid

3.2.5 effective length

heat pipe length between middle of evaporator and middle of condenser for configurations with one evaporator and one condenser only

NOTE Used to determine the heat pipe transport capability (see 3.2.10).

3.2.6 exposure temperature range

maximum temperature range to which a TPHTE is exposed during its product life cycle and which is relevant for thermo-mechanical qualification

NOTE 1 The internal pressure at the maximum temperature of this range defines the MDP for the pressure vessel qualification of a TPHTE.

NOTE 2 The extreme temperatures of this range can be below freezing or above critical temperatures of the working fluid.

NOTE 3 In other technical domains, this temperature range is typically called non-operating temperature range (see clause 4 for additional explanation).

3.2.7 heat pipe (HP)

TPHTE consisting of a single container with liquid and vapour passages arranged in such a way that the two fluid phases move in counter flow

NOTE 1 See TPHTE definition in 3.2.20.

NOTE 2 The capillary structure in a heat pipe extends over the entire container length.

3.2.8 heat pipe diode (HPD)

heat pipe which transports heat based on evaporation and condensation only in one direction

NOTE See heat pipe definition in 3.2.7.

3.2.9 loop heat pipe (LHP)

CDL with the fluid reservoir as integral part of the evaporator

NOTE 1 See CDL definition in 3.2.1.

NOTE 2 The reservoir can be separated, but has a capillary link to the evaporator.

3.2.10 heat transport capability

maximum amount of heat, which can be transported in a TPHTe from the evaporator to the condenser

NOTE For heat pipes it is the maximum heat load expressed in [Wm] (transported heat times effective length).

3.2.11 maximum design pressure (MDP)

maximum allowed pressure inside a TPHTe during product life cycle

3.2.12 mechanical pump driven loop (MPDL)

TPL in which fluid circulation is accomplished by a mechanical pump

NOTE See TPL definitions in 3.2.21.

3.2.13 product life cycle

product life starting from the delivery of the TPHTe hardware until end of service live

NOTE The product life cycle starts after acceptance of the product for flight.

3.2.14 reflux mode

operational mode where the liquid is returned from the condenser to the evaporator by gravitational forces and not by capillary forces

3.2.15 start-up

operational phase starting with initial supply of heat to the evaporator until nominal operating conditions of the device are established

3.2.16 sub-cooling

temperature difference between average CDL reservoir temperature and the temperature of the liquid line at the inlet to the reservoir

NOTE The average CDL reservoir temperature represents the saturation temperature inside the reservoir.

3.2.17 thermal performance temperature range

temperature range for which a TPHTE is thermally qualified

NOTE In the thermal performance temperature range a thermal performance map exists.

3.2.18 tilt for HP

height of the evaporator above the condenser during ground testing

NOTE 1 This definition is valid for a configuration with one evaporator and one condenser (see Figure 3-1).

NOTE 2 The tilt is measured from the highest point to the lowest point in Figure 3-1.




Figure 3-1: Tilt definition for HP

3.2.19 tilt for LHP

height of the evaporator above the reservoir during ground testing

NOTE 1 See Figure 3-2.

NOTE 2 The tilt is measured from the highest point of the evaporator to the lowest point of the condenser in Figure 3-2.

<https://standards.iteh.ai/catalog/standards/sist/03a945dc-610c-480c-8933-7712d4e36691/sist-en-16603-31-02-2018>

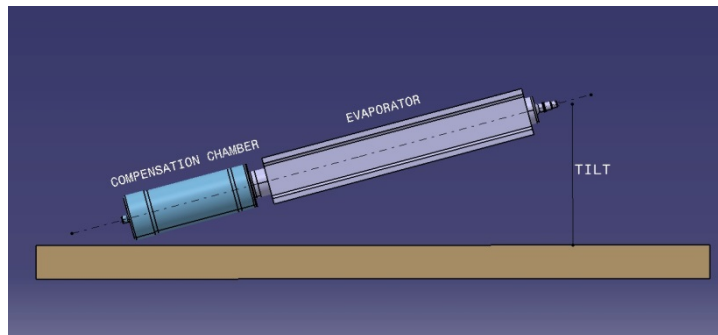


Figure 3-2: Tilt definition for LHP

3.2.20 two-phase heat transport equipment (TPHTE)

hermetically closed system filled with a working fluid and transporting thermal energy by a continuous evaporation and condensation process using the latent heat of the fluid

NOTE 1 A fluid evaporates in the heat input zone (evaporator) and condenses in the heat output zone (condenser).

NOTE 2 This is in contrast to a single-phase loop where the sensible heat of a liquid is transported (a liquid

heats up in the heat input zone and cools down in the heat output zone).

3.2.21 two-phase loop (TPL)

TPHTE with physically separated vapour and liquid transport lines forming a closed loop

NOTE See TPHTE definition in 3.2.20.

3.2.22 variable conductance heat pipe (VCHP)

heat pipe with an additional non-condensable gas reservoir allowing a variable thermal conductance between evaporator and condenser

NOTE 1 See heat pipe definition in 3.2.7.

NOTE 2 The variation in thermal conductance is generally accomplished by regulating the volume of a non-condensable gas plug reaching into the condenser zone, which in turn varies the effective condenser length.

NOTE 3 The variation of the gas volume can be performed by active or passive means.

3.3 Abbreviated terms

For the purpose of this Standard, the abbreviated terms from ECSS-S-ST-00-01 and the following apply:

| Abbreviation | Meaning |
|------------------|--|
| CCHP | constant conductance heat pipe |
| CDL | capillary driven loop |
| CPL | capillary pumped loop |
| CTE | coefficient of thermal expansion |
| DRD | document requirements definition |
| HP | heat pipe |
| HPD | heat pipe diode |
| LBB | leak before burst |
| LHP | loop heat pipe |
| MDP | maximum design pressure |
| MPDL | mechanical pump driven loop |
| MSPE | metallic special pressurized equipment |
| NDI | non-destructive inspection |
| PH | pressurized hardware |
| ROD | review-of-design |
| Q _{max} | maximum heat transport capability |