



SLOVENSKI STANDARD
SIST ETS 300 914 E5:2003

01-december-2003

8 [[]HUb]`WV] b]`hY`_ca i b]_UW`g_]`g]ghYa `fZUnU&ZL`E`HYfa]bUg_Ydf]`U] UUbY
Z b_W]Y`fH5 : ĸnUgħcf]hj Yž_]i dcfUV`Uc`Ug]b\ fcbYbcg]`bY`na c[`]j cgh]`f] GA
\$+`\$&žfUn`]]WU) `) `)%

Digital cellular telecommunications system (Phase 2+) (GSM); Terminal Adaptation Functions (TAF) for services using asynchronous bearer capabilities (GSM 07.02 version 5.5.1)

iteh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 914 E5:2003](https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003)

<https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003>

Ta slovenski standard je istoveten z: ETS 300 914 Edition 5

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--


SIST ETS 300 914 E5:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 914 E5:2003](https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003)

<https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003>

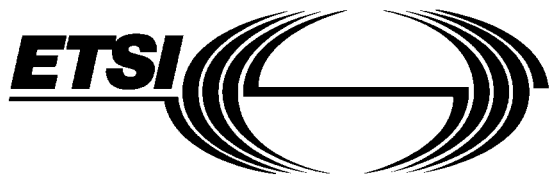

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 914

July 1998

Fifth Edition

Source: SMG

Reference: RE/SMG-040702QR4

ICS: 33.020

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



[SIST ETS 300 914 E5:2003](https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-)

<https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd->

**Digital cellular telecommunications system (Phase 2+);
Terminal Adaptation Functions (TAF)
for services using asynchronous bearer capabilities
(GSM 07.02 version 5.5.1)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

Internet: secretariat@etsi.fr - <http://www.etsi.fr> - <http://www.etsi.org>

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 914 E5:2003](https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003)

<https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003>

Contents

Foreword	5
1 Scope	7
1.1 Normative references	7
1.3 Abbreviations	9
2 Reference Configuration	9
2.1 Customer Access Configuration	9
2.2 Terminal Adaptation Function (TAF).....	9
3 Terminal Adaptation Functions for transparent services.....	9
3.1 Rate Adaptation	9
3.1.1 Rate Adaptation - V series	10
3.1.2 Rate Adaptation - S Interface (I.420).....	10
3.2 Interchange Circuit Signalling Mapping	10
3.2.1 Multislot configurations (TCH/F9.6 or TCH/F4.8).....	10
3.2.2 Channel coding TCH/F14.4.....	10
3.3 Interface Signal Levels.....	10
3.4 Call Establishment Signalling Mapping.....	11
3.4.1 Autocalling/answering.....	11
3.4.2 S Interface (I.420) Signalling Mapping	11
3.4.3 Call Establishment Manual Operation - Utilizing Alternate Speech/Data or Speech Followed By Data Capabilities.....	11
3.4.4 Call Establishment Manual Operation - Utilizing the Unrestricted Digital Capability.....	11
4 Terminal Adaptation Functions for non transparent services.....	11
4.1 Data Structure.....	11
4.1.1 Data Structure on S Interface.....	11
4.1.2 Data Structure on R Interface.....	11
4.1.3 Data Structure Provided by the L2R Function to the RLP Function	12
4.2 Signalling Mapping.....	12
4.3 Flow Control.....	12
4.3.1 Conditions Requiring Flow Control towards the Network	12
4.3.2 Conditions Requiring Flow Control towards TE2.....	12
4.3.3 Local Flow Control.....	12
4.3.4 Character Orientated Protocol with No Flow Control	13
4.4 Buffers	13
4.4.1 TX Buffers	13
4.4.2 RX Buffers.....	13
4.5 Bit Transparency.....	13
4.6 Transportation of "BREAK" condition.....	13
4.7 Data Compression	13
5 Terminal interfacing to GSM 04.08 Mapping.....	15
5.1 Mobile Originated Calls.....	16
5.2 Mobile Terminated Calls	16
6 Functionality for the Support of Dedicated PAD Services	17
Annex A (Normative): L2R Functionality	18
A.1 Introduction.....	18
A.2 The L2RCOP	18

A.3	Use of the L2RCOP	21
A.3.1	Radio Link Connection Control.....	21
A.3.2	Data Transfer	21
A.3.3	Status Transfer.....	21
A.3.4	Flow Control	21
A.3.5	Break	21
	A.3.5.1 Normal Realization	21
	A.3.5.2 Realization in case of Data Compression is used	21
Annex B (Informative):	Use of the 9 pin version of V.24 as a MT2 type	23
History		24

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 914 E5:2003](https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003)

<https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003>

Foreword

This European Telecommunications Standard (ETS) has been produced by the Special Mobile Group (SMG) of the European Telecommunications Standards Institute (ETSI).

This ETS defines the interfaces and Terminal Adaptation Functions (TAF) integral to a Mobile Termination (MT) which enables the attachment of asynchronous terminals to a MT within the digital cellular telecommunications system (Phase 2+).

The contents of this ETS is subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of this ETS, it will be resubmitted for OAP by ETSI with an identifying change of release date and an increase in version number as follows:

Version 5.x.y

where:

- y the third digit is incremented when editorial only changes have been incorporated in the specification;
- x the second digit is incremented for all other types of changes, i.e. technical enhancements, corrections, updates, etc.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI drafting rules.

Transposition dates	
Date of adoption of this ETS:	19 June 1998
Date of latest announcement of this ETS (doa):	31 October 1998
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	30 April 1999
Date of withdrawal of any conflicting National Standard (dow):	30 April 1999

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 914 E5:2003](https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003)

<https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-ab2b3a140f84/sist-ets-300-914-e5-2003>

1 Scope

This European Telecommunications Standard (ETS) defines the interfaces and Terminal Adaptation Functions (TAF) integral to a Mobile Termination (MT) which enables the attachment of asynchronous terminals to a MT (see GSM 04.02 [4]). The general aspects of Terminal Adaptation Functions are contained in GSM 07.01 (ETS 300 913) [7]. This ETS covers support of these services for the following interfaces and procedures:

- (i) V.14 procedures
- (ii) V.21 DTE/DCE interface
- (iii) V.22bis DTE/DCE interface
- (iv) V.23 DTE/DCE interface
- (v) V.32 DTE/DCE procedures
- (vi) I.420 S interface
- (vii) V.25bis signalling procedures
- (viii) V.25ter signalling procedures

The asynchronous data rates between the MT and the TE2 are defined in GSM 02.02 (ETS 300 904) [2].

1.1 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 350): "Digital cellular telecommunication system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 02.02 (ETS 300 904): "Digital cellular telecommunication system (Phase 2+); Bearer Services (BS) supported by a GSM Public Land Mobile Network (PLMN)".
<https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-403114408444/ets-300-914-e5-2003>
- [3] GSM 03.10: "Digital cellular telecommunication system (Phase 2+); GSM Public Land Mobile Network (PLMN) connection types".
- [4] GSM 04.02: "Digital cellular telecommunication system (Phase 2+); GSM Public Land Mobile Network (PLMN) access reference configuration".
- [5] GSM 04.08 (ETS 300 940): "Digital cellular telecommunication system (Phase 2+); Mobile radio interface layer 3 specification".
- [6] GSM 04.21 (ETS 300 945): "Digital cellular telecommunication system; Rate adaptation on the Mobile Station - Base Station System (MS - BSS) interface".
- [7] GSM 07.01 (ETS 300 913): "Digital cellular telecommunication system (Phase 2+); General on Terminal Adaptation Functions (TAF) for Mobile Stations (MS)".
- [8] GSM 07.07 (ETS 300 916): "Digital cellular telecommunication system (Phase 2+); AT command set for GSM Mobile Equipment (ME)".
- [9] GSM 09.05: "Digital cellular telecommunication system; Interworking between the Public Land Mobile Network (PLMN) and the Packet Switched Public Data Network (PSPDN) for Packet Assembly/Disassembly (PAD) facility access".
- [10] CCITT Recommendation V.4: "General structure of signals of international alphabet No.5 code for character oriented data transmission over public telephone networks".

- [11] CCITT Recommendation V.25 bis (1988): Blue book, Volume VIII, Fascicle VIII.1 "Automatic Calling and/or Answering Equipment on the General Switched Telephone Network (GSTN) using the 100-Series Interchange Circuits".
- [12] ITU-T Recommendation V.25 ter: "Serial asynchronous automatic dialling and control".
- [13] CCITT Recommendation V.110: "Support of data terminal equipments (DTEs) with V-Series interfaces by an integrated services digital network".
- [14] CCITT Recommendation V.24 (1988): Blue book, Volume VIII, Fascicle VIII.1 "List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment".
- [15] CCITT Recommendation V.21 (1988): Blue book, Volume VIII, Fascicle VIII.1 "300 bits per second duplex modem standardized for use in the general switched telephone network".
- [16] CCITT Recommendation V.14 (1988): Blue book, Volume VIII, Fascicle VIII.1 "Transmission of start-stop characters over synchronous bearer channels".
- [17] CCITT Recommendation V.22bis (1988): Blue book, Volume VIII, Fascicle VIII.1 "2400 bits per second duplex modem using the frequency division technique standardized for use on the general".
- [18] CCITT Recommendation V.23 (1988): Blue book, Volume VIII, Fascicle VIII.1 "600/1200-baud modem standardized for use in the general switched telephone network".
- [19] CCITT Recommendation V.32 (1988): Blue book, Volume VIII, Fascicle VIII.1 "A family of 2-wire, duplex modems operating at data signalling rates of up to 9600 bit/s for use in the general switched telephone network and on leased telephone-type circuits". <https://standards.iteh.ai/catalog/standards/sist/de91c5ef-3cda-4017-bdcd-9911-4130-9000-000000000000/ets-300-914-e5-2003>
- [20] CCITT Recommendation V.42 (1988): Blue book, Volume VIII, Fascicle VIII.1 "error-correcting procedures for DCEs using asynchronous-to-synchronous conversion".
- [21] ITU-T Recommendation V.42 bis: "Data compression procedures for data circuit terminating equipment (DCE) using error correction procedures
- [22] CCITT Recommendation X.28: "DTE/DCE interface for a start-stop mode data terminal equipment accessing the packet assembly/disassembly facility (PAD) in a public data network situated in the same country".
- [23] Recommendations I.310-I.470 (Study Group XVIII): Blue book, Volume III, Fascicle III.8, Overall network aspects and functions, ISDN user-network interfaces.
- [24] CCITT Recommendation I.420: Blue book, Volume III, Fascicle III.8 "Basic user-network interface".
- [25] Personal Computer Memory Card Association: "PCMCIA 2.1 or PC-Card 3.0 electrical specification or later revisions".
- [26] Infrared Data Association IrDA "IrPHY Physical layer signalling standard".
- [27] TIA-617: "Data Transmission Systems and Equipment - In-Band DCE Control".
- [28] GSM 02.34: "Digital cellular telecommunications system (Phase 2+); High Speed Circuit Switched Data (HSCSD) - Stage 1"

[29] GSM 03.34 (TS 101 038): "Digital cellular telecommunications system (Phase 2+); High Speed Circuit Switched Data (HSCSD) - Stage 2 Service Description"

1.3 Abbreviations

Abbreviations used in this ETS are listed in GSM 01.04 (ETR 350) [1].

2 Reference Configuration

GSM 07.01 (ETS 300 913) [7] and GSM 04.02 [4] describe the basic reference configurations.

2.1 Customer Access Configuration

This configuration is as shown in figure 1 of GSM 04.02 [4]. This ETS specifically refers to the Mobile Terminations (MTs) which support terminals of the type TE1 and TE2 with asynchronous capabilities. The TAF is functionally a part of an MT1, MT2 or MT0 with an integral asynchronous data capability.

2.2 Terminal Adaptation Function (TAF)

The TAF provides facilities to allow manual or automatic call control functions associated with alternate speech/data, speech followed by data and circuit switched services. The following functions are also included:

- Conversion of electrical, mechanical, functional and procedural characteristics of the V series and ISDN type interfaces to those required by the PLMN.
- Bit rate adaptation of the V series data signalling rates and the ISDN 64 kbit/s to that provided in the PLMN.
- The mapping functions necessary to convert automatic calling and/or automatic answering procedures of recommendation V.25 bis or V.25 ter and parameters for asynchronous operation.
- The mapping functions necessary to convert S interface signalling to the PLMN Dm channel signalling.
- Flow control (in some cases resulting in non-transparency of data as described in subclause 4.3).
- Layer 2 Relaying (see annex A).
- In-call modification function.
- Synchronization procedure, which means the task of synchronizing the entry to and the exit from the data transfer phase between two user terminals. This is described in GSM 07.01 (ETS 300 913) [7].
- Filtering of channel control information as described in GSM 07.01 (ETS 300 913) [7].
- Terminal compatibility checking.
- Splitting and combining of the data flow in case of multislot data configurations.

3 Terminal Adaptation Functions for transparent services

GSM 03.10 [3] refers to the connection types supporting the transparent services.

3.1 Rate Adaptation

GSM 04.21 (ETS 300 945) [6] describes the rate adaptation scheme to be utilized over the Base Station (BS) to Mobile Station (MS) link. GSM 03.10 [3] refers to the rate adaptation elements to be provided in the MS.