

ETSI GS MEC 028 V2.3.1 (2022-07)



Multi-access Edge Computing (MEC); WLAN Access Information API

(standards.iteh.ai)

ETSI GS MEC 028 V2.3.1 (2022-07)

<https://standards.iteh.ai/catalog/standards/sist/3fc79789-7ad3-4a30-a0fc-970cb2323dea/etsi-gs-mec-028-v2-3-1-2022-07>

Disclaimer

The present document has been produced and approved by the Multi-access Edge Computing (MEC) ETSI Industry Specification Group (ISG) and represents the views of those members who participated in this ISG.
It does not necessarily represent the views of the entire ETSI membership.

Reference

RGS/MEC-0028v231WlanAPI

Keywords

API, MEC, service, WLAN

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://standards-portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.

All rights reserved.

Contents

Intellectual Property Rights	7
Foreword.....	7
Modal verbs terminology.....	7
1 Scope	8
2 References	8
2.1 Normative references	8
2.2 Informative references.....	9
3 Definition of terms, symbols and abbreviations.....	9
3.1 Terms.....	9
3.2 Symbols.....	9
3.3 Abbreviations	10
4 Overview	11
5 Description of the service (informative).....	11
5.1 WLAN Access Information Service introduction	11
5.2 Sequence diagrams	12
5.2.1 Introduction.....	12
5.2.2 Sending a query for Access Point information	12
5.2.2.1 General query procedure	12
5.2.2.2 Sending a query for a list of Access Points	12
5.2.2.3 Sending a query for WLAN capabilities	13
5.2.2.4 Sending a query for BSS Load	13
5.2.2.5 Sending a query for WAN metrics.....	13
5.2.2.6 Sending a query for AP Location	13
5.2.2.7 Void.....	13
5.2.2.8 Sending a query for OBSS Load	13
5.2.3 Sending a query for Station information	13
5.2.3.1 General query procedure	13
5.2.3.2 Sending a query for a list of stations	14
5.2.3.3 Sending a query for channel used by station(s).....	14
5.2.3.4 Sending a query for RSSI of station(s).....	14
5.2.3.5 Sending a query for station data rates	15
5.2.3.6 Sending a query for station statistics	15
5.2.3.7 Sending a query for Neighbor Report	15
5.2.3.8 Sending a query for Channel Load.....	15
5.2.4 REST based subscribe-notify model.....	15
5.2.4.1 Subscribing to WLAN event notifications	15
5.2.4.2 Receiving notification on expiry of WLAN event subscription	16
5.2.4.3 Updating subscription for WLAN event notifications	17
5.2.4.4 Unsubscribing from WLAN event notifications	17
5.2.5 Receiving WLAN event notifications about station data rates	18
5.2.6 Receiving WLAN event notifications about associated stations.....	19
5.2.7 Measurement Configuration	20
5.2.7.1 Creating a Measurement configuration	20
5.2.7.2 Updating a Measurement Configuration	21
5.2.7.3 Deleting a Measurement Configuration	22
5.2.7.4 Example of using a Measurement Configuration	22
6 Data Model	23
6.1 General	23
6.2 Resource data types	23
6.2.1 Introduction.....	23
6.2.2 Type: ApInfo	23
6.2.3 Type: StaInfo	24
6.2.4 Type: MeasurementConfig	25

6.2.5	Type: MeasurementConfigLinkList.....	25
6.3	Subscription data types.....	25
6.3.1	Introduction.....	25
6.3.2	Type: AssocStaSubscription	25
6.3.3	Type: StaDataRateSubscription	26
6.3.4	Type: SubscriptionLinkList	27
6.3.5	Type: MeasurementReportSubscription	28
6.3.6	Void	28
6.4	Notifications data types	28
6.4.1	Introduction.....	28
6.4.2	Type: AssocStaNotification	29
6.4.3	Type: StaDataRateNotification	29
6.4.4	Type: ExpiryNotification	29
6.4.5	Type: MeasurementReportNotification	29
6.4.6	Type: TestNotification	30
6.5	Referenced structured data types.....	30
6.5.1	Introduction.....	30
6.5.2	Type: TimeStamp	30
6.5.3	Type: ApIdentity.....	30
6.5.4	Type: WlanCapabilities	31
6.5.5	Void	31
6.5.6	Type: WanMetrics	31
6.5.7	Type: BssLoad	32
6.5.8	Type: ExtBssLoad	32
6.5.9	Type: ApLocation	33
6.5.10	Type: NeighborReport	33
6.5.11	Type: StaIdentity	34
6.5.12	Type: ApAssociated.....	34
6.5.13	Type: StaStatistics	34
6.5.14	Type: HtCapabilities	35
6.5.15	Type: VhtCapabilities	35
6.5.16	Type: HeCapabilities	35
6.5.17	Type: DmgCapabilities	35
6.5.18	Type: EdmgCapabilities	36
6.5.19	Type: GeoLocation	36
6.5.20	Type: CivicLocation	36
6.5.21	Type: Rssi	37
6.5.22	Type: StaDataRate	38
6.5.23	Type: LinkType	38
6.5.24	Type: ChannelLoadConfig	38
6.5.25	Type: BeaconRequestConfig	38
6.5.26	Type: StaStatisticsConfig	39
6.5.27	Type: BeaconReport	39
6.5.28	Type: BeaconReportingConfig	40
6.5.29	Type: ReportedBeaconFrameInfo.....	41
6.5.30	Type: BssidInfo	41
6.5.31	Type: BssCapabilities	42
6.5.32	Type: NeighborReportConfig	43
6.5.33	Type: STACounterTriggerCondition.....	43
6.5.34	Type: StaStatisticsGroupZeroData	43
6.5.35	Type: StaStatisticsGroupOneData	44
6.5.36	Type: StaStatisticsGroup2to9Data.....	44
6.5.37	Type: ReportingReasonStaCounters	44
6.5.38	Type: ReportingReasonQoSCounters	45
6.5.39	Type: ChannelLoad.....	45
6.5.40	Type: OBssLoad	45
6.5.41	Type: MeasurementInfo.....	46
6.5.42	Type: WebsocketNotifConfig.....	46
6.6	Referenced simple data types and enumerations	46
7	API definition	46
7.1	Introduction	46

7.2	Global definitions and resource structure	47
7.3	Resource: ap_information	48
7.3.1	Description	48
7.3.2	Resource definition	48
7.3.3	Resource Methods	48
7.3.3.1	GET	48
7.3.3.2	PUT	49
7.3.3.3	PATCH	50
7.3.3.4	POST	50
7.3.3.5	DELETE	50
7.4	Resource: sta_information	50
7.4.1	Description	50
7.4.2	Resource definition	50
7.4.3	Resource Methods	50
7.4.3.1	GET	50
7.4.3.2	PUT	51
7.4.3.3	PATCH	52
7.4.3.4	POST	52
7.4.3.5	DELETE	52
7.5	Resource: subscriptions	52
7.5.1	Description	52
7.5.2	Resource definition	52
7.5.3	Resource methods	52
7.5.3.1	GET	52
7.5.3.2	PUT	53
7.5.3.3	PATCH	53
7.5.3.4	POST	53
7.5.3.5	DELETE	55
7.6	Resource: existing subscription	55
7.6.1	Description	55
7.6.2	Resource definition	55
7.6.3	Resource methods	55
7.6.3.1	GET	55
7.6.3.2	PUT	56
7.6.3.3	PATCH	58
7.6.3.4	POST	58
7.6.3.5	DELETE	58
7.7	Resource: measurements	59
7.7.1	Description	59
7.7.2	Resource definition	59
7.7.3	Resource methods	59
7.7.3.1	GET	59
7.7.3.2	PUT	60
7.7.3.3	PATCH	60
7.7.3.4	POST	60
7.7.3.5	DELETE	62
7.8	Resource: existing measurements	62
7.8.1	Description	62
7.8.2	Resource definition	62
7.8.3	Resource methods	62
7.8.3.1	GET	62
7.8.3.2	PUT	63
7.8.3.3	PATCH	65
7.8.3.4	POST	65
7.8.3.5	DELETE	65
Annex A (informative):	Complementary material for API utilization	66
Annex B (informative):	Mapping of permissions for RESTful API and topic based alternative transport	67
B.1	Overview	67

B.2 Mapping of permissions - RESTful and topic based alternative transport.....	67
History	68

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ETSI GS MEC 028 V2.3.1 (2022-07)

<https://standards.iteh.ai/catalog/standards/sist/3fc79789-7ad3-4a30-a0fc-970cb2323dea/etsi-gs-mec-028-v2-3-1-2022-07>

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Group Specification (GS) has been produced by ETSI Industry Specification Group (ISG) Multi-access Edge Computing (MEC).

Modal verbs terminology

In the present document **"shall"**, **"shall not"**, **"should"**, **"should not"**, **"may"**, **"need not"**, **"will"**, **"will not"**, **"can"** and **"cannot"** are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"must" and **"must not"** are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document focuses on the WLAN Access Information MEC service. It describes the message flows and the required information. The present document also specifies the RESTful API with the data model.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

[1] Void.

[2] IETF RFC 2818: "HTTP Over TLS".

NOTE: Available at <https://tools.ietf.org/html/rfc2818>.

[3] IETF RFC 5246: "The Transport Layer Security (TLS) Protocol Version 1.2".

NOTE 1: Available at <https://tools.ietf.org/html/rfc5246>.

NOTE 2: Obsoleted by IETF RFC 8446.

[4] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".

NOTE: Available at <https://tools.ietf.org/html/rfc6749>.

[5] IETF RFC 6750: "The OAuth 2.0 Authorization Framework: Bearer Token Usage".

NOTE: Available at <https://tools.ietf.org/html/rfc6750>.

[6] IETF RFC 6225: "Dynamic Host Configuration Protocol Options for Coordinate-Based Location Configuration Information".

NOTE: Available at <https://tools.ietf.org/html/rfc6225>.

[7] IETF RFC 4776: "Dynamic Host Configuration Protocol (DHCPv4 and DHCPv6) Option for Civic Addresses Configuration Information".

NOTE: Available at <https://tools.ietf.org/html/rfc4776>.

[8] IEEE 802.11™-2016: "IEEE Standard for Information technology -- Telecommunications and information exchange between systems Local and metropolitan area networks -- Specific requirements - Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications".

[9] Void.

[10] ETSI GS MEC 009: "Multi-access Edge Computing (MEC); General principles, patterns and common aspects of MEC Service APIs".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

[i.1] ETSI GS MEC 011: "Multi-access Edge Computing (MEC); Edge Platform Application Enablement".

[i.2] OpenAPI™ Specification.

NOTE: Available at <https://github.com/OAI/OpenAPI-Specification>.

[i.3] Wi-Fi® Alliance 2014: "Hot Spot 2.0 (Release 2) Technical Specification V1.0.0".

[i.4] ETSI GS MEC 002: "Multi-access Edge Computing (MEC); Phase 2: Use Cases and Requirements".

[i.5] ETSI GS MEC 003: "Multi-access Edge Computing (MEC); Framework and Reference Architecture".

[i.6] ETSI GS MEC 012: "Multi-access Edge Computing (MEC); Radio Network Information API".

[i.7] ETSI GS MEC 029: "Multi-access Edge Computing (MEC); Fixed Access Information API".

[i.8] Wi-Fi® Alliance 2019: "Data Elements Specification v1.0".

[i.9] ISO 3166: "Codes for the representation of names of countries and their subdivisions".

[i.10] IEEE P802.11ax™: "Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications - Amendment 1: Enhancement for High Efficiency WLAN".

[i.11] IEEE P802.11ay™: "Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications - Amendment 1: Enhancement for High Efficiency WLAN - Amendment 2: Enhanced throughput for operation in license-exempt bands above 45 GHz".

[i.12] ETSI GS MEC 001: "Multi-access Edge Computing (MEC); Terminology".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ETSI GS MEC 001 [i.12] apply.

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI GS MEC 001 [i.12] and the following apply:

3GPP	3 rd Generation Partnership Project
AID	Association Identifier
A-MPDU	Aggregate MAC Protocol Data Unit
A-MSDU	Aggregate MAC Service Data Unit
AP	Access Point
API	Application Programming Interface
APSD	Automatic Power Save Delivery
ASEL	Antenna Selection
BSS	Basic Service Set
BSSID	Basic Service Set Identifier
DMG	Directional Multi-Gigabit

NOTE: As in Directional Multi-Gigabit WLAN.

DSSS	Direct Sequence Spread Spectrum
EDMG	Enhanced Directional Multi-Gigabit

NOTE: As in Enhanced Directional Multi-Gigabit WLAN.

ERP	Extended Rate PHY
ESS	Extended Service Set
FCS	Frame Check Sequence
FTM	Fine Timing Measurement
HE	High Efficiency

NOTE: As in High Efficiency WLAN.

HT	High Throughput
----	-----------------

NOTE: As in High Throughput WLAN.

HTTP	Hyper Text Transport Protocol
ID	Identifier
IEEE	Institute of Electrical and Electronics Engineers
LMD	Load Measurement Duration
MAC	Medium Access Control
MCS	Modulation and Coding Scheme
MDE	Mobility Domain Element
MPDU	MAC Protocol Data Unit
NSS	Number of Spatial Streams
OBSS	Overlapping Basic Service Set
OFDM	Orthogonal Frequency Division Multiplexing
PBSS	Personal Basic Service Set
PCP	PBSS Control Point
PHY	Physical layer
PPDU	PHY Protocol Data Unit
QoS	Quality of Service
RCPI	Received Channel Power Indicator
RSNI	Received Signal-to-Noise Indicator
RSSI	Receive Signal Strength Indicator
RTS	Request To Send
SC	Single Carrier
SSID	Service Set Identifier
STA	Station
TSF	Timing Synchronization Function
TU	Time Unit
URI	Uniform Resource Identifier

VHT Very High Throughput

NOTE: As in Very High Throughput WLAN.

WAI WLAN Access Information
 WAIS WLAN Access Information Service
 WLAN Wireless Local Area Network

4 Overview

The present document specifies the WLAN Access Information (WAI) API to support the requirements defined for Multi-access Edge Computing in ETSI GS MEC 002 [i.4].

Clause 5 provides overview how WLAN Access Information Service (WAIS) may be used by the MEC applications and by the MEC platform. It describes the information flows used for WLAN Access Information Service.

The information that can be exchanged over the WAI API is described in clause 6 which provides detailed description on all information elements that are used for WLAN Access Information.

Clause 7 describes the actual WAI API providing detailed information how information elements are mapped into a RESTful API design.

5 Description of the service (informative)

5.1 WLAN Access Information Service introduction

Multi-access Edge Computing allows running the MEC applications at the edge of the network where the environment is characterized by low latency, proximity, high bandwidth and exposure to location and up-to-date information from the underlying access networks. The information on current conditions from the WLAN access is shared via WLAN Access Information Service.

WLAN Access Information Service (WAIS) is a service that provides WLAN access related information to service consumers within MEC System. The WLAN Access Information Service is available for authorized MEC applications and is discovered over the Mp1 reference point as specified in ETSI GS MEC 003 [i.5]. The granularity of the WLAN Access Information may be adjusted based on parameters such as information per station (STA), per Access Point (AP) or per Multiple Access Points (Multi-APs).

The WLAN Access Information may be used by the MEC applications and MEC platform to optimize the existing services and to provide new type of services that are based on up to date information from WLAN access possibly combined with the information such as Radio Network Information as specified in ETSI GS MEC 012 [i.6] or Fixed Access Network Information as specified in ETSI GS MEC 029 [i.7] from the other access technologies.

The present document defines the protocol, data model and interface in the form of RESTful Application Programming Interface (APIs) specifications. Information about the Access Points and client stations can be requested either by querying or by subscribing to notifications.

The procedures defined for queries are flexible and cater wide set of use cases from simple queries to queries requesting wide set of information on targets. This flexibility is enabled with concepts of attribute-based filtering and attribute selectors, as specified in ETSI GS MEC 009 [10], and those are described in more detail in clauses 6.18 and 6.19 of ETSI GS MEC 009 [10].

5.2 Sequence diagrams

5.2.1 Introduction

The service consumers communicate with WLAN Access Information Service over WAI API to get contextual information from the WLAN access network. Both the MEC application and MEC platform may be service consumers and both the MEC platform and MEC application may be providers of WLAN Access Information.

The WAI API supports both queries and subscriptions (pub/sub mechanism) over the RESTful API or over alternative transports such as message bus. Alternative transports are not specified in detail in the present document. When queries are used, the attribute-based filter expression can be used to limit the number of objects returned by query operation and attribute-selectors can be used to limit the number of attributes included in the response.

For RESTful architectural style, the present document defines the HTTP protocol bindings.

5.2.2 Sending a query for Access Point information

5.2.2.1 General query procedure

Figure 5.2.2.1-1 shows a scenario where the service consumer (e.g. a MEC application or a MEC platform) sends a query to receive information about Access Points (APs). The response may contain information on one or more Access Points. The number of queried objects and desired contents can be controlled with an attribute-based filter expression and attribute-selectors as defined in ETSI GS MEC 009 [10].

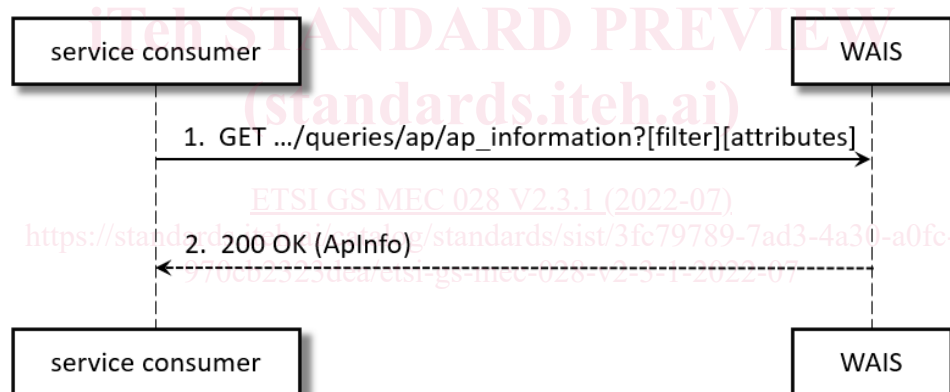


Figure 5.2.2.1-1: Flow of service consumer querying Access Point information

A service consumer requesting Access Point information, as illustrated in Figure 5.2.2.1-1, consists of the following steps:

- 1) Service consumer sends a GET request to the resource representing the Access Point(s) information. The request may contain attribute-filter to limit the number of Access Points whose information is received and attribute-selector to limit the number of attributes included in the response.
- 2) WAIS responds with "200 OK" with the message body containing the requested Access Point information.

5.2.2.2 Sending a query for a list of Access Points

A list of Access Points available in the system can be queried with the flow as in Figure 5.2.2.1-1 by using the attribute selector as follows:

GET .../queries/ap/ap_information?fields=apId

5.2.2.3 Sending a query for WLAN capabilities

The WLAN Capabilities of Access Points can be queried with the flow of Figure 5.2.2.1-1 by using the attribute selector as follows:

```
GET .../queries/ap/ap_information?fields=apId,wlanCap
```

The above query, if successful, would return the identifiers of Access Points available together with their WLAN Capabilities.

As an example, the WLAN Capabilities of the Access Point with an apId equal to "admiralsclub" can be queried using the attribute selector and filter attribute as follows:

```
GET .../queries/ap/ap_information?filter=(eq,apId,admiralsclub)&fields=apId,wlanCap
```

5.2.2.4 Sending a query for BSS Load

The BSS Load of an Access Point can be queried with the flow of Figure 5.2.2.1-1 by using the attribute selector and filter attribute (in this instance the Access Point with apId equal to "admiralsclub") as follows:

```
GET .../queries/ap/ap_information?filter=(eq,apId,admiralsclub)&fields=apId,bssLoad
```

More accurate information about BSS Load, for the same Access Point, can be obtained by adding the attribute "extBssLoad" in the list of requested fields as follows:

```
GET .../queries/ap/ap_information?filter=(eq,apId,admiralsclub)&fields=apId,bssLoad,extBssLoad
```

5.2.2.5 Sending a query for WAN metrics

The WAN metrics of an Access Point can be queried with the flow of Figure 5.2.2.1-1 by using the attribute selector and filter attribute (in this instance the Access Point with apId equal to "admiralsclub") as follows:

```
GET .../queries/ap/ap_information?filter=(eq,apId,admiralsclub)&fields=apId,wanMetrics
```

5.2.2.6 Sending a query for AP Location

The location of an Access Point can be queried with the flow of Figure 5.2.2.1-1 by using the attribute selector and filter attribute (in this instance the Access Point with apId equal to "admiralsclub") as follows:

```
GET .../queries/ap/ap_information?filter=(eq,apId,admiralsclub)&fields=apId,apLocation
```

5.2.2.7 Void

5.2.2.8 Sending a query for OBSS Load

The Overlapping BSS (OBSS) Load of an Access Point can be queried with the flow of Figure 5.2.2.1-1 by using the attribute selector and filter attribute (in this instance the Access Point with apId equal to "admiralsclub") as follows:

```
GET .../queries/ap/ap_information?filter=(eq,apId,admiralsclub)&fields=apId,obssLoad
```

5.2.3 Sending a query for Station information

5.2.3.1 General query procedure

Figure 5.2.3.1-1 shows a scenario where the service consumer (e.g. a MEC application or a MEC platform) sends a request to receive information about client station(s). The response may contain information on one or more stations and the number of queried objects and desired contents can be controlled with attribute-based filtering and attribute-selectors as defined in ETSI GS MEC 009 [10].

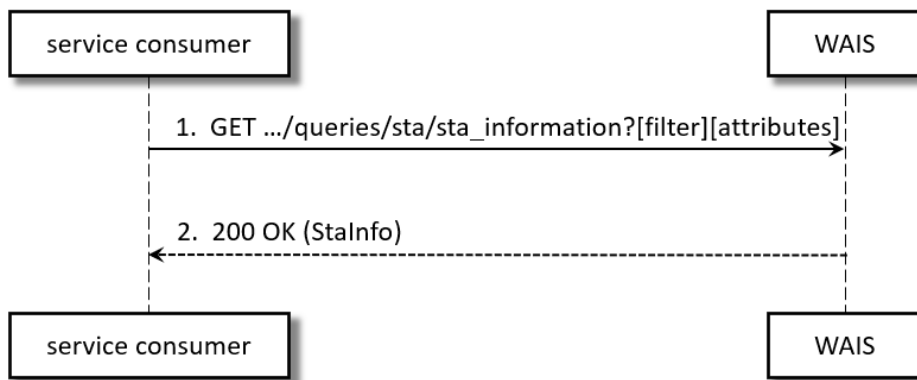


Figure 5.2.3.1-1: Flow of service consumer querying station Info

A service consumer requesting client station information, as illustrated in Figure 5.2.3.1-1, consists of the following steps:

- 1) Service consumer sends a GET request to the resource representing the station(s) information. The request may contain attribute-filters to limit the number of client stations whose information is received and attribute-selectors to limit the number of attributes included in the response.
- 2) WAIS responds with "200 OK" with the message body containing the requested WLAN station information.

5.2.3.2 Sending a query for a list of stations

A list of stations available in the system can be queried with the flow as in Figure 5.2.3.1-1 by using the attribute selector as follows:

```
GET .../queries/sta/sta_information?fields=staId
```

The above query, if successful, would return the identities of all the stations that are known to be associated in the system. Information about the Access Points that the stations are associated to can be queried as follows:

```
GET .../queries/sta/sta_information?fields=staId,apAssociated
```

Further, to get the stations associated to a particular Access Point, the following query can be used including the attribute selector and filter attribute (in this instance the stations associated to Access Point with apAssociated equal to "mec123"):

```
GET .../queries/sta/sta_information?filter=(eq,apAssociated,mec123)&fields=staId,apAssociated
```

5.2.3.3 Sending a query for channel used by station(s)

The channel used by stations can be queried with the flow of Figure 5.2.3.1-1 by using the attribute selector as follows:

```
GET .../queries/sta/sta_information?fields=staId,channel
```

5.2.3.4 Sending a query for RSSI of station(s)

The RSSI value of stations can be queried with the flow of Figure 5.2.3.1-1 by using the attribute selector as follows:

```
GET .../queries/sta/sta_information?fields=staId,rssi
```

The results can be narrowed down to stations under specific Access Point by adding filter attribute (in this instance the Access Point with apId equal to "mec123") to the query as follows:

```
GET .../queries/sta/sta_information?filter=(eq,apAssociated,mec123)&fields=staId,rssi
```

5.2.3.5 Sending a query for station data rates

The physical layer data rate of stations can be queried with the flow of Figure 5.2.3.1-1 by using the attribute selector as follows:

```
GET .../queries/sta/sta_information?fields=staId,staDataRate
```

As there may be great number of stations in the system, it may be practical to limit the query to consider either stations under specific Access Point or certain specific station by including the attribute filter:

```
GET .../queries/sta/sta_information?filter=(eq,apAssociated,mec404)&fields=staId,staDataRate
```

```
GET .../queries/sta/sta_information?filter=(eq,staId,C8:D0:66:08:B6:0F)&fields=staId,staDataRate
```

5.2.3.6 Sending a query for station statistics

The statistics of stations can be queried with the flow of Figure 5.2.3.1-1 by using the attribute selector as follows:

```
GET .../queries/sta/sta_information?fields=staId,staStatistics
```

As there may be great number of stations in the system, it may be practical to limit the query to consider either stations under specific Access Point or certain specific station by including the attribute filter:

```
GET .../queries/sta/sta_information?filter=(eq,apAssociated,mec404)&fields=staId,staStatistics
```

```
GET .../queries/sta/sta_information?filter=(eq,staId,C8:D0:66:08:B6:0F)&fields=staId,staStatistics
```

5.2.3.7 Sending a query for Neighbor Report

The neighbor report of stations can be queried with the flow of Figure 5.2.3.1-1 by using the attribute selector as follows:

```
GET .../queries/sta/sta_information?fields=staId,neighborReport
```

As there may be great number of stations in the system, it may be practical to limit the query to consider either stations under specific Access Point or a certain specific station by including the attribute filter:

```
GET .../queries/sta/sta_information?filter=(eq,apAssociated,mec404)&fields=staId,neighborReport
```

```
GET .../queries/sta/sta_information?filter=(eq,staId,C8:D0:66:08:B6:0F)&fields=staId,neighborReport
```

5.2.3.8 Sending a query for Channel Load

The channel load as measured via stations can be queried with the flow of Figure 5.2.3.1-1 by using the attribute selector as follows:

```
GET .../queries/sta/sta_information?fields=staId,channelLoad
```

As there may be great number of stations in the system, it may be practical to limit the query to consider either stations under specific Access Point or a certain specific station by including the attribute filter:

```
GET .../queries/sta/sta_information?filter=(eq,apAssociated,mec404)&fields=staId,channelLoad
```

```
GET .../queries/sta/sta_information?filter=(eq,staId,C8:D0:66:08:B6:0F)&fields=staId,channelLoad
```

5.2.4 REST based subscribe-notify model

5.2.4.1 Subscribing to WLAN event notifications

To receive notifications on selected WLAN events, the service consumer creates a subscription to certain specific event that is available at WAIS. Figure 5.2.4.1-1 shows a scenario where the service consumer uses REST based procedures to create a subscription for WLAN event notifications.