

---

---

**Photography — Digital cameras —  
Image flare measurement**

*Photographie — Caméras numériques — Mesurage de l'éclat d'image*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 18844:2017](https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017)

<https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017>



**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 18844:2017

<https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

	Page
Foreword .....	iv
Introduction .....	v
<b>1 Scope .....</b>	<b>1</b>
<b>2 Normative references .....</b>	<b>1</b>
<b>3 Terms and definitions .....</b>	<b>1</b>
<b>4 Measurement chart and method .....</b>	<b>2</b>
4.1 Conditions of shooting .....	2
4.1.1 Arrangement of measuring equipment .....	2
4.1.2 Conditions of shooting .....	3
4.2 Charts .....	3
4.2.1 General .....	3
4.2.2 Charts for single spot measurement .....	4
4.2.3 Charts for multiple spot measurement .....	4
4.3 Measurement procedure .....	5
4.3.1 General .....	5
4.3.2 Calculation of luma and luminance .....	5
4.3.3 Areas used for calculation of luma and luminance .....	6
4.3.4 Measurement types .....	7
<b>5 Presentation of results .....</b>	<b>9</b>
<b>Annex A (informative) Examples of reporting .....</b>	<b>11</b>
<b>Bibliography .....</b>	<b>12</b>

[ISO 18844:2017](https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017)  
<https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html). (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 42, *Photography*.

ISO 18844:2017

<https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017>

## Introduction

When images are produced by a digital camera, the camera captures not only the light from the scene but also stray, unwanted light (flare) that can reduce contrast in the image. Generally, the processing applied to the image will compensate for normal amounts of flare light, resulting in improved image quality. However, flare light can be quite variable, and image processing algorithms are not always successful at removing it. Poor or excessive flare removal processing can reduce the quality of the final image. For example, subtraction of the average flare across the image could result in over-subtraction of the flare in dark areas, resulting in loss of shadow detail. In evaluating digital cameras, it is therefore useful to measure the signal from the flare light remaining in processed images. This remaining flare signal is called “image flare.”

Image flare in digital cameras is caused not only by lenses but also by camera bodies and image sensors, and is affected by image processing. Measurements of image flare include all contributing factors: the optical system, camera body, image sensor, and image processing. ISO 9358 specifies methods of measuring “veiling glare,” the flare from lens systems, but it is not intended to be applied for the measurement of image flare. This document specifies a method to measure image flare using the image data output by digital cameras.

A standard method is needed in part because of the nature of image flare. It can vary both locally and from image to image depending on all the factors mentioned above. While it is possible to measure image flare at different positions in different images, the variability of image flare makes it difficult to compare such measurements out of context. This document provides a standard method for measuring image flare which can be useful for cross comparison.

**iteh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 18844:2017](https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017)

<https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 18844:2017

<https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c8610b7c5a4c/iso-18844-2017>

# Photography — Digital cameras — Image flare measurement

## 1 Scope

This document specifies the definition of image flare for digital cameras, test patterns, measurement conditions, and methods, so as to enable the comparison of the results of measurement.

The methods of measurement are designed to enable the assessment of the performance of digital cameras by using image data output by the digital cameras.

This document does not specify the aim values or the allowable range of value for the image flare.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61966-2-1, *Multimedia systems and equipment — Colour measurement and management — Part 2-1: Default RGB colour space — sRGB*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

### 3.1

#### image flare

unwanted increase in signal in a processed image output by a digital camera resulting from light detected by an image sensor that does not emanate from a corresponding subject point

Note 1 to entry: Image flare is measured for a camera system. The camera system includes lenses, camera body, image sensor, and image processing used for the measurement. The following four are common with regard to light detection: i) internal multiple reflections, scattering or diffraction of optics (including lens surfaces, filter surfaces, or sensors), ii) light diffusion at lens barrel, body, or edge of lens, iii) leaking of light, and iv) the optical system as measured by point spread function including spherical and chromatic aberrations. Differentiation between these four might be difficult once an image is captured, but it is more appropriate to isolate the last one with regard to the system resolution. Thus, care should be taken to minimize point spread function contribution in the measurement of image flare. Image flare also includes the effects of image processing. Even if the same camera is used to capture RAW image data, different image flare values might be measured if different image processing algorithms are applied. This is an intended result because the measurement of image flare includes all contributing factors of lenses, camera body, image sensor, and image processing.

Note 2 to entry: “Image flare” was defined in ISO 3664:2000 in another context, but it was deleted in ISO 3664:2009.

Note 3 to entry: “Image flare” is defined in ISO 12231:2012 but without any source standards. The definition is the same statement as in ISO 3664:2000. ISO 3664:2000 was replaced by ISO 3664:2009 and this does not include the definition of “image flare.”

## 4 Measurement chart and method

### 4.1 Conditions of shooting

Each test chart shall be specified together with the lighting conditions such as illuminance, luminance, and colour temperature of illumination.

#### 4.1.1 Arrangement of measuring equipment

##### 4.1.1.1 Reflection-type test chart

The arrangement of the measuring equipment for a reflection-type test chart shall be set up as shown in Figure 1. The light source(s) should be positioned to provide uniform illumination and produce no glare or specular reflections from the target.

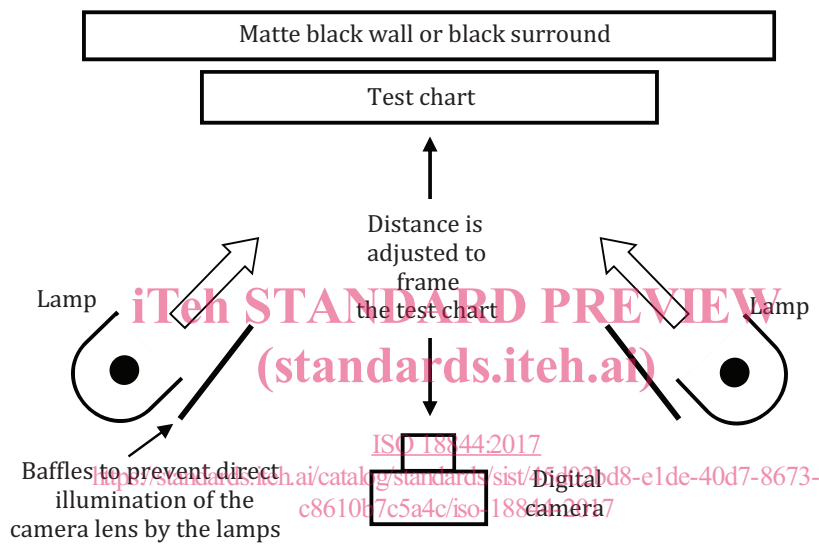
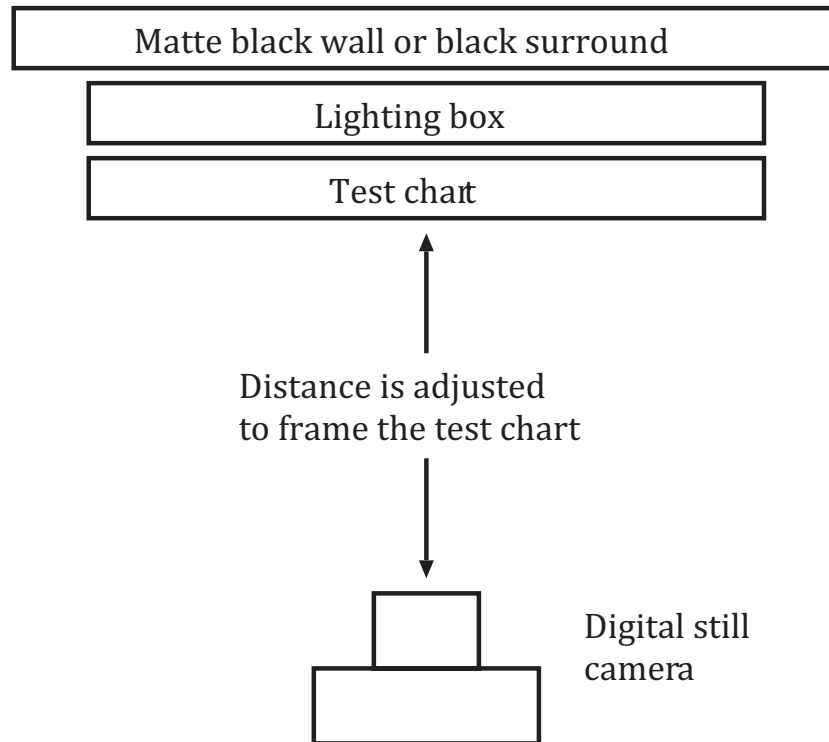


Figure 1 — Arrangement of measuring equipment for reflection-type test chart

##### 4.1.1.2 Transparent-type test chart

The arrangement of the measuring equipment for a transparent-type test chart shall be set up as shown in Figure 2.





**Figure 2 — Arrangement of measuring equipment for transparent-type test chart**  
 iTeh STANDARD PREVIEW  
 (standards.iteh.ai)

#### 4.1.2 Conditions of shooting

ISO 18844:2017

Unless otherwise stated, the conditions of shooting are as follows.  
<https://standards.iteh.ai/catalog/standards/sist/45d02bd8-e1de-40d7-8673-c80f007c5a4c/iso-18844-2017>

- Illuminance of illumination of a reflection-type test chart should be 1 000 lx to 2 000 lx.
- Luminance of transparent-type lighting box should be 318 cd/m<sup>2</sup> to 637 cd/m<sup>2</sup>.
- Total non-uniformity of lighting and test chart shall be <5 %; (|Max-Ave|/Ave <0,05 and |Min-Ave|/Ave <0,05).
- Average outdoor daylight illuminant shall be used. The CCT (correlated colour temperature) of the illuminant shall be 5 700 K ± 1 000 K.

The illuminance should be measured using an illuminance meter (without cosine correction) positioned at the centre of the test chart, pointing the receptor in the direction of the digital camera to be measured.

Illumination from the outside of the chart can increase the measured image flare value, and should therefore be avoided for this measurement.

When shooting, lower camera sensitivity setting should be used in order to avoid the effect of noise.

## 4.2 Charts

### 4.2.1 General

The size of the charts shall exceed the field of view of the camera lens by (41 ± 2) %, in both the vertical and horizontal directions.

Chart 1 has a white surface, and the field of view shall be specified by a black rectangle whose thickness is one five-hundredth of the vertical length (shorter side) of the rectangle. The measurement areas shall be specified by black areas drawn in the rectangle. Several black areas may be arranged diagonally, but

the total of the black areas shall be no larger than 5 % of the inner area of the rectangle. The total of the black areas does not include the black rectangle itself. At least one measurement area at the centre of the rectangle shall be used.

Chart 2 has a black surface, and the field of view shall be specified by a white rectangle whose thickness is one five hundredth of the vertical length of the rectangle. White lines whose thicknesses are one hundredth of the vertical length of the rectangle shall be drawn around the corresponding part of the centre black area of the chart 1 with one hundredth of the vertical length from it. The total length of the white lines shall be the same as the total of side lengths of the centre black area of chart 1.

The white part shall have 80 % or more reflectance ratio or 80 % or more transmittance ratio. The contrast ratio of charts is defined in 4.3.4. The white parts of the reflectance-type charts should have reflectance characteristics close to that of a Lambertian surface. The reflectance or transmittance of the black parts of test chart 1 and 2 shall be equal. Specular reflections from the black part of chart 1 and the corresponding region in chart 2, which will be used to calculate  $Y_{B2}$ ,  $Y_{B3}$ , should be avoided. Thus, when reflection-type charts are used, it is recommended to place light traps in those regions.

4.2.2 Charts for single spot measurement

When measuring image flare only at the centre part, window pattern charts specified in Figure 3 should be used.

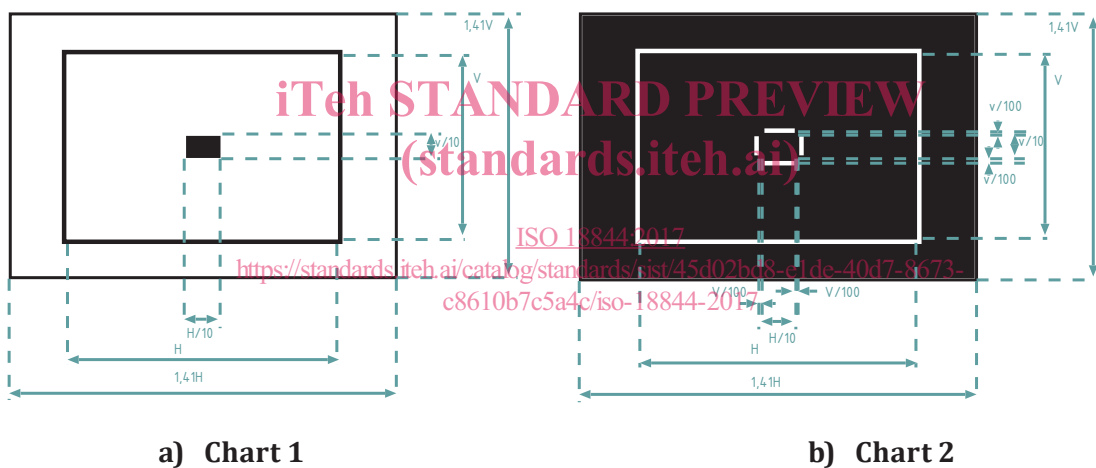


Figure 3 — Window pattern charts

4.2.3 Charts for multiple spot measurement

Examples of charts that conform to this document and that can be used for measuring image flare at multiple spots are shown in Figure 4.

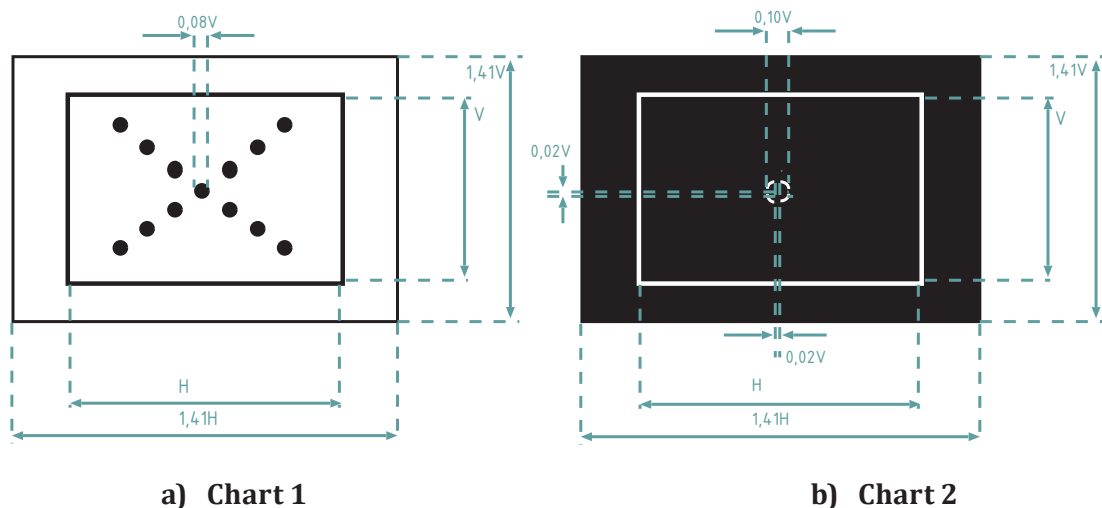


Figure 4 — Dot pattern charts

### 4.3 Measurement procedure

#### 4.3.1 General

Each test chart shall be positioned so that the full horizontal and vertical extents ( $H$  and  $V$ ) fill the field of view of the digital camera. The aspect ratio of the image shall be equal to  $H:V$ .

The measurement shall be carried out using the digital signals of the images output from the measured digital camera with which the test chart is shot.

White balance should be adjusted to render the centre part of the image as neutral as possible, using manual or auto-white balance.

The focusing shall be in the manual or auto-focusing mode under the in-focus condition at the centre of the image.

For a camera with a user selectable compression ratio (e.g. different JPEG compression ratios), the compression ratio should be set to the minimum ratio (largest file size) to minimize compression artifacts. Alternatively, RAW format image data processed using RAW converter software may be used with the RAW converter output format using minimal or no compression.

If the lens was delivered with a bundled hood from a manufacturer, the bundled hood shall be used. Optional measurements without the hood may be performed.

NOTE 1 Lens hoods and filters on the lens will affect the measurement.

NOTE 2 When measuring image flare, dust and dirt on the lens can greatly increase the measured value.

#### 4.3.2 Calculation of luma and luminance

The output luma value ( $Y'_{\text{luma}}$ ) shall be obtained from the camera eight-bit-per-channel RGB output signals ( $R'$ ,  $G'$ , and  $B'$ ), by using Formula (1).

$$Y'_{\text{luma}} = 0,299\ 0 \cdot R' + 0,587\ 0 \cdot G' + 0,114\ 0 \cdot B' \quad (1)$$

The calculation from the camera output signals ( $R'$ ,  $G'$ , and  $B'$ ) to a luminance signal ( $Y$ ) is provided in colour encoding specification. In the case of sRGB output images, the conversion specified in IEC 61966-2-1 shall be used.