
**Plain bearings — Hydrodynamic plain
tilting pad thrust bearings under
steady-state conditions —**

Part 2:

**Functions for calculation of tilting pad
thrust bearings**

iTeh STANDARD PREVIEW

(standards.iteh.ai)
*Paliers lisses — Butées hydrodynamiques à patins oscillants
fonctionnant en régime stationnaire —*

Partie 2: Fonctions pour le calcul des butées à patins oscillants

<https://standards.iteh.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 12130-2:2015](https://standards.iteh.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015)

<https://standards.iteh.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative reference.....	1
3 Functions for the tilting pad thrust bearing.....	1
3.1 General.....	1
3.2 Characteristic value of load-carrying capacity, F^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{\min}/C_{wed}	1
3.3 Characteristic value of friction, f^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{\min}/C_{wed}	4
3.4 Relative lubricant flow rates Q_1^* and Q_3^* as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{\min}/C_{wed}	5
3.5 Relative pressure centre coordinate or tilting pad supporting point a_{P}^* as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{\min}/C_{wed}	8
4 Effective dynamic viscosity of the lubricant, η_{eff}, as a function of the effective lubricant film temperature, T_{eff}.....	10
Bibliography.....	12

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 12130-2:2015](https://standards.iteh.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015)

<https://standards.iteh.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

The committee responsible for this document is ISO/TC 123, *Plain bearings*, Subcommittee SC 4, *Methods of calculation of plain bearings*.

This second edition cancels and replaces the first edition (ISO 12130-2:2001), of which it constitutes a minor revision.

ISO 12130 consists of the following parts, under the general title *Plain bearings — Hydrodynamic plain tilting pad thrust bearings under steady-state conditions*:

- Part 1: *Calculation of tilting pad thrust bearings*
- Part 2: *Functions for calculation of tilting pad thrust bearings*
- Part 3: *Guide values for the calculation of tilting pad thrust bearings*

Introduction

The functions of the following type are necessary for the calculation of oil-lubricated tilting pad thrust bearings in accordance with ISO 12130-1, assuming hydrodynamic conditions with full lubrication. They are based on the premises and boundary conditions specified therein. The values necessary for the calculation can be determined by means of the given formulae as well as from diagrams and tables. The formulae are approximations of the numerically determined values traced as curves in accordance with Reference [1]. The explanation of the symbols and examples for the calculation are included in ISO 12130-1.

On account of the premises laid down in ISO 12130-1:2001, Clause 3, items g) and k), the following definitions are not applicable to the calculation of thrust bearings with centrally supported tilting pads ($a_F^* = 0,5$), which, under the premises indicated therein, have no hydrodynamic load-carrying capacity. For the determination of the characteristic values of such bearings, it is necessary to consider at least the deformations of the tilting pads which occur during operation. Compare, e.g. References [2] and [3].

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 12130-2:2015

<https://standards.iteh.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 12130-2:2015

<https://standards.iteh.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015>

Plain bearings — Hydrodynamic plain tilting pad thrust bearings under steady-state conditions —

Part 2: Functions for calculation of tilting pad thrust bearings

1 Scope

This part of ISO 12130 specifies the derivation of mathematical functions to be applied when calculating tilting pad thrust bearings.

This part of ISO 12130 is not applicable to heavily loaded tilting pad thrust bearings.

2 Normative reference

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12130-1, *Plain bearings — Hydrodynamic plain tilting pad thrust bearings under steady-state conditions — Part 1: Calculation of tilting pad thrust bearings*

3 Functions for the tilting pad thrust bearing

3.1 General

An explanation of the symbols is given in ISO 12130-1.

3.2 Characteristic value of load-carrying capacity, F^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{\min}/C_{wed}

Approximation of the curves of [Figure 1](#) (range of application: $0,2 \leq \frac{h_{\min}}{C_{\text{wed}}} \leq 2$):

$$F^* = 5 \left(\frac{h_{\min}}{C_{\text{wed}}} \right)^2 \times \left[\ln \frac{1 + (h_{\min}/C_{\text{wed}})}{h_{\min}/C_{\text{wed}}} - \frac{2}{1 + 2 \times \frac{h_{\min}}{C_{\text{wed}}}} \right] \times \frac{A^* + B^* \left[1 - \frac{1}{h_{\min}/C_{\text{wed}}} \right] + C \left[1 - \frac{1}{h_{\min}/C_{\text{wed}}} \right]^2}{1 + a \left[\frac{1}{B/L} \right]^2} \quad (1)$$

$$a = \frac{10}{\left(1 + 2 \frac{h_{\min}}{C_{\text{wed}}} \right)^2} \times \left\{ \left[\frac{h_{\min}}{C_{\text{wed}}} + \left(\frac{h_{\min}}{C_{\text{wed}}} \right)^2 \right]^2 + \frac{1 - 2 \left[\frac{h_{\min}}{C_{\text{wed}}} + \left(\frac{h_{\min}}{C_{\text{wed}}} \right)^2 \right]}{12 \left[\left(1 + 2 \frac{h_{\min}}{C_{\text{wed}}} \right) \times \ln \frac{1 + (h_{\min}/C_{\text{wed}})}{h_{\min}/C_{\text{wed}}} - 2 \right]} \right\} \quad (2)$$

$$A^* = 1,168\ 6 - 0,329\ 45 \times \left(\frac{B}{L} \right) + 0,222\ 67 \times \left(\frac{B}{L} \right)^2 - 0,046\ 51 \times \left(\frac{B}{L} \right)^3 \quad (3)$$


$$B^* = -0,100\ 95 + 0,197\ 43 \times \left(\frac{B}{L}\right) - 0,131\ 36 \times \left(\frac{B}{L}\right)^2 + 0,028\ 703 \times \left(\frac{B}{L}\right)^3 \quad (4)$$

$$C^* = -0,004\ 879\ 1 + 0,008\ 601 \times \left(\frac{B}{L}\right) - 0,005\ 401\ 5 \times \left(\frac{B}{L}\right)^2 + 0,001\ 127\ 8 \times \left(\frac{B}{L}\right)^3 \quad (5)$$

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 12130-2:2015

<https://standards.iteh.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015>

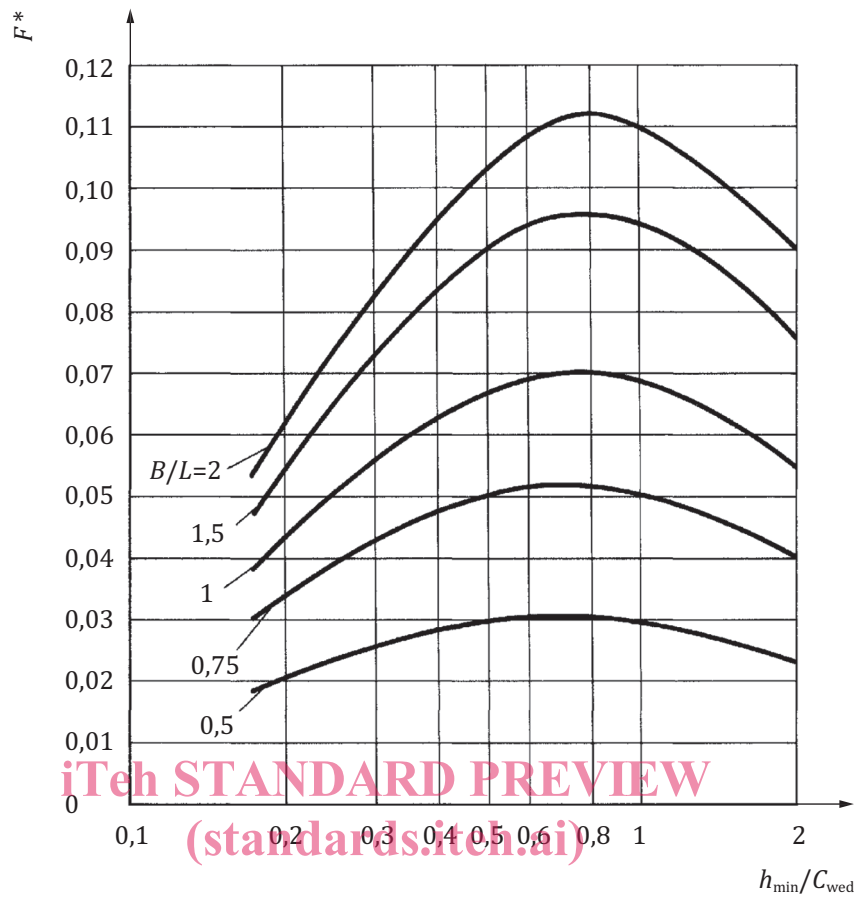

SIST ISO 12130-2:2015
<https://standards.itech.ai/catalog/standards/sist/51f38cc9-9777-4163-b113-3924fc4e7384/sist-iso-12130-2-2015>

Figure 1 — Characteristic value of load-carrying capacity, F^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{\min}/C_{wed}

Table 1 — Values to **Figure 1** [$F^* = f(B/L, h_{\min}/C_{\text{wed}})$]

h_{\min}/C_{wed}	B/L				
	2	1,5	1	0,75	0,5
2,000	0,089 95	0,077 21	0,055 75	0,040 39	0,022 88
1,000	0,109 6	0,094 57	0,068 94	0,050 37	0,028 92
0,667	0,109 5	0,094 97	0,069 97	0,051 58	0,030 05
0,500	0,103 2	0,090 01	0,067 01	0,049 83	0,029 45
0,333	0,087 19	0,076 88	0,058 36	0,044 09	0,026 76
0,250	0,072 85	0,064 87	0,050 11	0,038 37	0,023 82
0,200	0,061 27	0,055 05	0,043 20	0,033 45	0,021 17

3.3 Characteristic value of friction, f^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{min}/C_{wed}

Approximation of the curves of [Figure 2](#) (range of application: $0,2 \leq \frac{h_{min}}{C_{wed}} \leq 2$):

$$f^* = \frac{6}{5} \left\{ 4 \times \frac{h_{min}}{C_{wed}} \times \ln \frac{1 + (h_{min}/C_{wed})}{h_{min}/C_{wed}} - \frac{6 \times \frac{h_{min}}{C_{wed}}}{1 + 2 \times \frac{h_{min}}{C_{wed}}} \right\} \times \left\{ 1 + \alpha \left[\frac{1}{B/L} \right]^2 \right\} A^* \tag{6}$$

$$\alpha = \frac{10}{\left[1 + 2 \times \frac{h_{min}}{C_{wed}} \right]^2} \left\{ \left[\frac{h_{min}}{C_{wed}} + \left(\frac{h_{min}}{C_{wed}} \right)^2 \right]^2 + \frac{1 - 2 \left[\frac{h_{min}}{C_{wed}} + \left(\frac{h_{min}}{C_{wed}} \right)^2 \right]}{12 \left[\left(1 + 2 \times \frac{h_{min}}{C_{wed}} \right) \times \ln \frac{1 + (h_{min}/C_{wed})}{h_{min}/C_{wed}} - 2 \right]} \right\} \tag{7}$$

$$A^* = -0,214\ 59 + 0,880\ 71 \left(\frac{B}{L} \right) - 0,297\ 60 \left(\frac{B}{L} \right)^2 + 0,037\ 91 \left(\frac{B}{L} \right)^3 \tag{8}$$

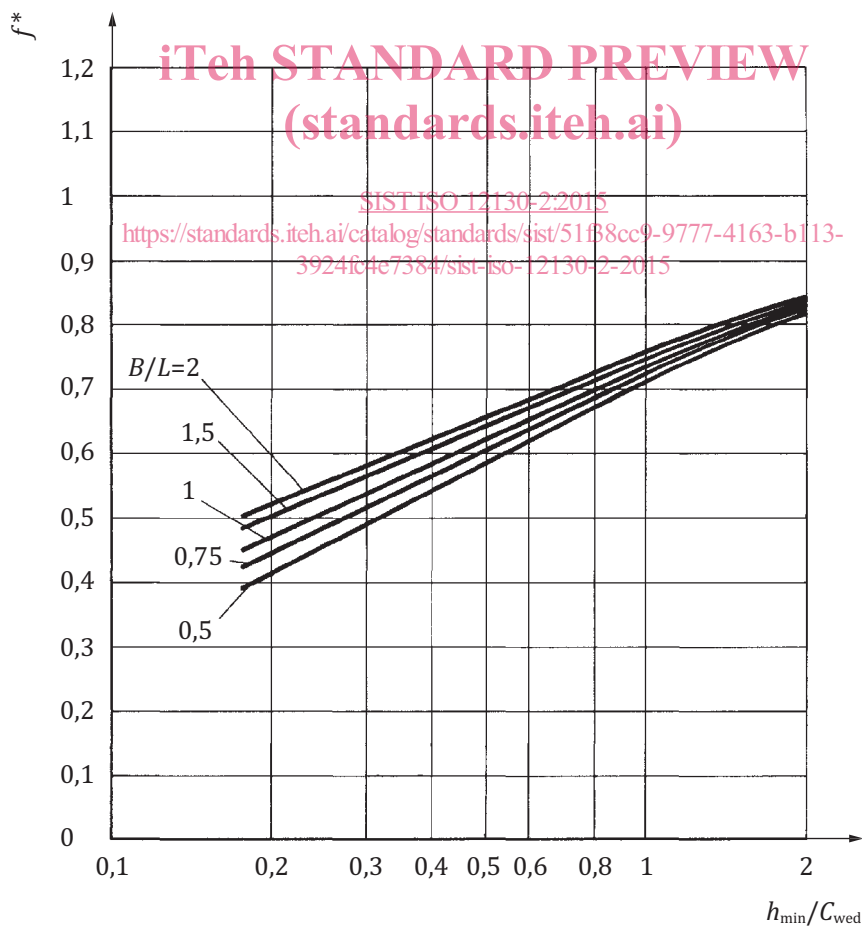


Figure 2 — Characteristic value of friction, f^* , as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{min}/C_{wed}

Table 2 — Values to Figure 2 [$f^* = f(B/L, h_{\min}/C_{\text{wed}})$]

h_{\min}/C_{wed}	B/L				
	2	1,5	1	0,75	0,5
2,000	0,833 4	0,830 2	0,824 9	0,821 0	0,816 7
1,000	0,748 0	0,740 4	0,727 6	0,718 3	0,707 6
0,667	0,693 0	0,682 1	0,663 3	0,649 5	0,633 4
0,500	0,652 5	0,639 3	0,616 3	0,599 1	0,678 8
0,333	0,592 9	0,577 4	0,549 6	0,528 2	0,502 2
0,250	0,548 1	0,532 1	0,502 6	0,479 1	0,450 0
0,200	0,511 5	0,496 0	0,466 3	0,442 0	0,411 3

3.4 Relative lubricant flow rates Q_1^* and Q_3^* as a function of the relative bearing width, B/L , and the relative minimum lubricant film thickness, h_{\min}/C_{wed}

Approximation of the curves of Figures 3 and 4 (range of application: $0,2 \leq \frac{h_{\min}}{C_{\text{wed}}} \leq 2$):

$$Q_i^* = \frac{1 + (h_{\min}/C_{\text{wed}})}{1 + 2 \times \frac{h_{\min}}{C_{\text{wed}}}} \times \left\{ A_i + B_i \times \left[1 - \frac{1}{h_{\min}/C_{\text{wed}}} \right] \right\} \quad (9)$$

with constants A_i and B_i

for $Q_i^* = Q_1^*$:

$$A_i = 1,549 4 - 0,344 48 \left(\frac{B}{L} \right) + 0,072 457 \left(\frac{B}{L} \right)^2 \quad (10)$$

$$B_i = -0,572 08 + 0,370 91 \left(\frac{B}{L} \right) - 0,079 18 \left(\frac{B}{L} \right)^2 \quad (11)$$

for $Q_i^* = Q_3^*$:

$$A_i = 2 \left[0,358 6 - 0,240 57 \left(\frac{B}{L} \right) + 0,052 129 \left(\frac{B}{L} \right)^2 \right] \quad (12)$$

$$B_i = 2 \left[-0,276 82 + 0,186 07 \left(\frac{B}{L} \right) - 0,040 081 \left(\frac{B}{L} \right)^2 \right] \quad (13)$$