



# SLOVENSKI STANDARD SIST ETS 300 933 E4:2003

01-december-2003

---

8 [[ ]HJb]`W] b]`hY`ca i b]`UW`g\_]`g]ghYa `fZuU&ZL`E`Grcf]Hj]` [ cj cfbY[ U  
g\_i d]bg\_Y[ U\_]WUfU; 7 GL`E`Grcdb`U&f] GA `\$' `\*, žfUh] ]WU) '( `o%

Digital cellular telecommunications system (Phase 2+) (GSM); Voice Group Call Service (VGCS); Stage 2 (GSM 03.68 version 5.4.1)

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

Ta slovenski standard je istoveten z: **ETS 300 933 Edition 4**  
<https://standards.iteh.ai/catalog/standards/sist/82d985d9-d811-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003>

---

**ICS:**

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--

**SIST ETS 300 933 E4:2003**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ETS 300 933 E4:2003

<https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003>



**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 933**

July 1998

Fourth Edition

Source: SMG

Reference: RE/SMG-030368QR3

ICS: 33.020

**Key words:** Digital cellular telecommunications system, Global System for Mobile communications (GSM)



[SIST ETS 300 933 E4:2003](https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003)

[https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-](https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003)

[5e9b1b7eb6df/sist-ets-300-933-e4-2003](https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003)

**Digital cellular telecommunications system (Phase 2+);  
Voice Group Call Service (VGCS) - Stage 2  
(GSM 03.68 version 5.4.1)**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**Internet:** [secretariat@etsi.fr](mailto:secretariat@etsi.fr) - <http://www.etsi.fr> - <http://www.etsi.org>

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998. All rights reserved.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 933 E4:2003](https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003>

## Contents

Foreword .....	5
1 Scope .....	7
2 Normative references .....	7
3 Definitions and abbreviations .....	8
3.1 Definitions .....	8
3.2 Abbreviations .....	8
4 Main concepts .....	9
4.1 Group definition .....	9
4.2 Group conversations .....	9
4.2.1 Group call initiation .....	9
4.2.1.1 Normal operation with successful outcome .....	9
4.2.1.2 Exceptional procedures .....	10
4.2.2 On-going group calls .....	10
4.2.2.1 Normal operation with successful outcome .....	10
4.2.2.2 Exceptional procedures .....	11
4.2.3 Leaving of a group call without termination .....	11
4.2.4 Group call termination .....	12
4.2.5 Acknowledgements .....	12
4.2.6 Transactions between the mobile station and the network .....	12
5 General architecture .....	12
5.1 Group Call Register (GCR) .....	12
5.2 Voice group call responsibility .....	14
6 Compatibility issues .....	15
7 Transmission .....	15
7.1 Transmission architecture .....	15
7.2 Radio channels .....	15
7.3 Data confidentiality .....	16
8 Information storage .....	17
8.1 Information stored in the GCR .....	17
8.1.1 Information used for routing of service subscriber originated voice group calls .....	17
8.1.2 Group call attributes .....	17
8.1.2.1 Group call area .....	18
8.1.2.2 Dispatcher identities .....	18
8.1.2.3 No activity time .....	18
8.1.2.4 Priorities .....	18
8.2 Information managed per subscriber .....	19
8.2.1 Stored in the HLR .....	19
8.2.2 Stored in the VLR .....	19
8.2.3 Stored in the SIM .....	19
8.3 Information used for routing of dispatcher originated voice group calls .....	19
9 Identities .....	20
9.1 Elementary identities for group calls .....	20
9.2 Use of identities in the network .....	20
10 Operation and maintenance aspects .....	21

11	Function and information flows.....	21
11.1	Group management .....	21
11.2	Group membership management .....	21
11.3	Call management .....	22
11.3.1	Call establishment .....	22
11.3.1.1	Service subscriber call establishment.....	22
11.3.1.1.1	Initial stage .....	22
11.3.1.1.2	Establishment of the transmission means .....	23
11.3.1.1.3	Release of the dedicated transmission means of the calling service subscriber.....	23
11.3.1.1.4	Release of the dedicated transmission means of mobile stations responding to a notification .....	23
11.3.1.1.5	Transfer of a talking service subscriber to a dedicated connection...	23
11.3.1.2	Dispatcher call establishment .....	24
11.3.1.3	Notification procedures .....	24
11.3.1.4	Destination subscribers.....	26
11.3.1.5	Called dispatchers.....	26
11.3.2	Call release.....	26
11.3.3	Leaving of a dispatcher.....	27
11.3.4	Leaving and returning to a voice group call .....	27
11.3.5	Cell change.....	27
11.3.5.1	Listening subscriber .....	27
11.3.5.2	Talking subscriber .....	27
11.3.5.3	Dispatcher.....	27
11.3.6	New calls .....	28
11.3.7	Uplink transmission management .....	28
11.3.8	Overview of signalling .....	28
11.4	Functional requirement of Anchor MSC .....	46
11.5	Functional requirement of Relay MSC .....	53
11.6	Functional requirement of GCR .....	61
11.7	Functional requirement of VLR .....	64
12	Content of messages.....	66
12.1	Messages on the B-interface (MSC-VLR).....	66
12.1.1	Allocate Group Call Number .....	66
12.1.2	Allocate Group Call Number ack .....	66
12.1.3	Allocate Group Call Number negative response.....	66
12.1.4	Release Group Call Number.....	67
12.2	Messages on the E-interface (MSC-MSC).....	67
12.2.1	Prepare Group Call.....	67
12.2.2	Prepare Group Call ack .....	67
12.2.3	Prepare Group Call negative response .....	67
12.2.4	Send Group Call End Signal.....	67
12.2.5	Forward Group Call Signalling .....	68
12.2.6	Process Group Call Signalling .....	68
12.3	Messages on the I-interface (MSC-GCR) .....	69
12.3.1	GCR Interrogation.....	69
12.3.2	GCR Interrogation ack .....	70
12.3.3	GCR interrogation negative response .....	70
12.3.4	Call released.....	70
Annex A (informative):	Status of GSM 03.68.....	71
History .....		72

## Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) of the European Telecommunications Standards Institute (ETSI).

This ETS specifies the stage two description of the voice group call service (VGCS) within the digital cellular telecommunications system.

The contents of this ETS is subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of this ETS, it will be resubmitted for UAP by ETSI with an identifying change of release date and an increase in version number as follows:

Version 5.x.y

where:

- y the third digit is incremented when editorial only changes have been incorporated in the specification;
- x the second digit is incremented for all other types of changes, i.e. technical enhancements, corrections, updates, etc.

<b>Transposition dates</b>	
Date of adoption of this ETS:	3 July 1998
Date of latest announcement of this ETS (doa):	31 October 1998
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	30 April 1999
Date of withdrawal of any conflicting National Standard (dow):	30 April 1999

<https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003>

Blank page

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ETS 300 933 E4:2003](https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/82d985f9-d81f-4662-9806-5e9b1b7eb6df/sist-ets-300-933-e4-2003>



## 1 Scope

This European Telecommunication Standard (ETS) specifies the stage two description of the Voice Group Call Service (VGCS) which allows speech conversation of a predefined group of service subscribers in half duplex mode on the radio link taking into account multiple subscribers involved in the group call per cell.

## 2 Normative references

This ETS incorporates by dated and undated references, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 350): "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 02.68 (ETS 300 925): "Digital cellular telecommunications system (Phase 2+); Voice Group Call Service (VGCS) - stage 1".
- [3] GSM 03.22 (ETS 300 930): "Digital cellular telecommunications system; Functions related to Mobile Station (MS) in idle mode".
- [4] GSM 03.67 (ETS 300 932): "Digital cellular telecommunications system (Phase 2+); enhanced Multi-Level Precedence and Pre-emption service (eMLPP) - Stage 2".
- [5] GSM 04.08 (ETS 300 940): "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification".
- [6] GSM 05.08 (ETS 300 911): "Digital cellular telecommunications system (Phase 2+); Radio subsystem link control".
- [7] GSM 08.08: "Digital cellular telecommunications system (Phase 2+); Mobile Switching Centre - Base Station System (MSC - BSS) interface Layer 3 specification".
- [8] CCITT Recommendation E.164: "Numbering plan for the ISDN era".

### 3 Definitions and abbreviations

#### 3.1 Definitions

Definitions used in this ETS are also defined in GSM 02.68.

For the purposes of this ETS, the following definitions apply:

**voice group call channel:** Combined uplink/downlink to be allocated in a cell of the group call area for a particular voice group call. The uplink can be used by the presently talking service subscriber only. All mobile stations of the listening service subscribers in one cell shall listen to the common downlink.

**group members:** Service subscribers entitled to belong to a particular group classified by a certain group identification (group ID).

**voice group call member:** Any group member or dispatcher participating in an on going voice group call.

**group call attributes:** Group call area, dispatcher identities, and the non-activity time which results in the release of the voice group call by the network.

**Group Call Register (GCR):** A functionality in the network containing the group call attributes.

**group call anchor MSC:** The MSC responsible for managing and maintaining a particular voice group call. The group call anchor MSC is determined as the one controlling the cells of the group call area (see also group call relay MSC). For voice group call services where the group call area exceeds one MSC area, the group call anchor MSC is predefined in the network.

**group call relay MSC:** MSC controlling cells of a group call area which are not under control of the group call anchor MSC for those voice group call services where the group call area exceeds one MSC area.

**notification:** Notifications are given on common control channels or dedicated channels in order to inform group members which are either in idle mode or in dedicated mode or participating in a voice group call or voice broadcast call on the existence of voice group calls.

**Notification Channel (NCH):** Common control channel on which the notifications are sent by the network (equivalent to a paging channel).

#### 3.2 Abbreviations

Abbreviations used in this ETS are also listed in GSM 01.04.

For the purpose of this specification the following abbreviations apply:

eMLPP	enhanced Multi-Level Precedence and Pre-emption
GCR:	Group Call Register
NCH:	Notification Channel
VBS:	Voice Broadcast Service
VGCS:	Voice Group Call Service

## 4 Main concepts

### 4.1 Group definition

Service subscribers can become group members on a PLMN wide basis to one or more groups pre-defined in the network by a corresponding group identification (group ID). The membership enables them to initiate or receive voice group calls associated with that group ID. Certain dispatchers connected to external networks also require the capability to initiate or receive voice group calls.

In addition to subscriber details in the HLR, it is necessary for the mobile station to be aware of its group membership by storing details on the SIM. This is required because it shall respond to notification messages which include only the group ID (i.e. no IMSI or TMSI details).

Having become a group member, each service subscriber can set to active state or deactive state the group ID or any one out of his several group IDs on the SIM. In active state the subscriber can initiate voice group calls to that group. When in deactive state the subscriber can not make voice group calls to the group and the mobile station ignores any notification for that group.

### 4.2 Group conversations

#### 4.2.1 Group call initiation

##### 4.2.1.1 Normal operation with successful outcome

A group call area can be restricted to a single MSC area or can exceed one MSC area (implementation option).

A voice group call shall be initiated by a calling subscriber by a related MMI action for the service selection and the group ID dialled.

The MSC in which a voice group call is initiated obtains (by requesting the Group Call Register (GCR, see clause 5) the group call attributes.

This GCR interrogation after call initiation also determines whether the MSC shall act as anchor or as relay MSC. If the MSC is not the MSC then the call will be "forwarded" from the relay to the respective MSC (information also delivered by GCR) and further "call-establishment" is done by the anchor MSC as described in the following.

When a calling subscriber initiates a voice group call, one voice group call channel shall be established in each cell of the group call area and notifications for that call shall be sent in each of these cells. As an alternative, voice group call channels may only be established in cells in reaction to responses received from mobile stations on the notifications. At the same time standard connections to dispatchers in the mobile network or in an external network shall be established.

A voice group call channel shall consist of a combined uplink/downlink. The uplink will be used exclusively by the presently talking service subscriber. All mobile stations of the listening service subscribers in one cell shall only listen to the same common downlink.

The calling subscriber shall have its dedicated standard uplink/downlink during call establishment and for the first period when he will be the talking service subscriber up to the time when the network decides that he shall join the voice group call channel. The mobile station of the calling subscriber shall then go to the voice group call channel and the dedicated standard uplink/downlink shall be released. From that moment on the calling subscriber shall be treated as all the other services subscribers.

Only one voice group call channel shall be established in each cell for any given voice group call, although there may be a number of simultaneous voice group calls within the same cell.

Service subscribers shall be notified on the voice group call in each cell. These voice group call notification messages shall be broadcast on the notification channel (NCH).

The notification messages use the group ID rather than individual TMSIs/IMSI. Additionally, a group call area identification shall be included in order to enable a resolution in the case of overlapping group call areas. A service subscriber's mobile station needs to be able to recognise notification messages for those group IDs subscribed to and presently activated.

The network may also send messages on appropriate voice group call channel FACCHs, in order to notify group call members who may participate in other voice group calls. In addition, also paging information messages for standard calls may be sent in order to inform group call members on actually paged point-to-point calls.

Further the network may provide notification on the voice group call to service subscribers who have subscribed to the paged group ID and which are in dedicated mode. The process of broadcasting messages on NCHs is to be carried out throughout the call in order to provide the "late entry" facility whereby group members entering the area can join the call.

On receiving notification of a voice group call a group call member's mobile station shall adjust to the nominated channel to receive the voice group call if this channel was described in the notification message and receive the information on the downlink. Whilst receiving, the mobile station shall not transmit on the uplink SACCH. This group receive mode is different to the normal idle mode or dedicated mode. If no channel description was provided in the notification message, the mobile station shall establish a dedicated connection in order to respond to the notification. The network may then provide the mobile station with a channel description for the voice group call.

As a further mobile station option, the mobile station may read its paging subchannel in the current cell while in group receive mode or in group transmit mode in order to receive paging messages for mobile terminated calls.

#### 4.2.1.2 Exceptional procedures

Completion of links into congested cells where pre-emption did not occur is required.

On receiving details of a voice group call the user may choose to move to the notified call or the mobile station may automatically move to the notified call if the new call is of higher priority than the existing call and automatic acceptance applies for this priority level.

#### 4.2.2 On-going group calls

##### 4.2.2.1 Normal operation with successful outcome

Within each voice group call starting from the instant where the calling subscriber first becomes a listening service subscriber, one service subscriber has the access at any one time to the uplink of the voice group call channel and his speech is then broadcast on all voice group call channel downlinks accordingly. The mobile station of the talking service subscriber shall mute the downlink speech to avoid non intelligible echos.

If more than one service subscriber apply to the uplink, contention resolution shall be performed in the network. Contention resolution shall be performed in the group call anchor MSC.

Additionally, in order to speed up the uplink access procedure, the BSS may grant the uplink prior to contention resolution being performed by the group call anchor MSC. This would mean that more than one service subscriber may access to the uplink and the respective speech may be combined in the group call bridge and broadcast onto all voice group call downlink channels during a transitional period. The anchor MSC shall then select one of the talking subscribers and pre-empt the uplink use of the other talking subscribers.

Dispatchers voice involved shall be broadcast on the voice group call channel downlink at any time. Mobile dispatchers are provided with a standard link and thus with an dedicated permanent uplink different from the voice group call channel.

All non-dispatcher group call members are provided with an indication on the voice group call channel of whether the uplink is in use. When the uplink is not in use, any non-dispatcher group call member can request access to the uplink. Any speech from dispatchers is combined with any speech from a talking service subscriber.

In case of one talking service subscriber plus a parallel talking dispatcher, the talking service subscriber's mobile station shall receive an indication by means of signalling from the network so that it can unmute the downlink.

The release of the uplink is triggered by the user and indicated by the mobile station to the network. The network shall then indicate to the listening mobile stations that the uplink is free.

Mobile stations in group receive mode use the group receive mode procedure (see GSM 03.22) to "camp-on" in a new cell to be able to listen to the group call channel. The mobile station may find the voice group call channel details of a new cell on the related NCH.

A network may decide not to establish voice group call channels in all cells. Instead, notifications containing no channel description may be provided. If a mobile station moves to such a cell, it must respond to the notification in order to receive the voice group call. The network may then establish a voice group call channel and inform the mobile station on the channel position.

A network may obtain knowledge on whether mobile stations are listening in a cell by sending an uplink access request on the voice group call channel downlink when no talking service subscriber is present. Mobile stations receiving such a request shall send uplink access bursts on the voice group call channel uplink with the establishment cause "reply on uplink access request". If no uplink access bursts are received by the network, the network may decide to release the voice group call channel in that cell and then provide notifications containing no channel description.

NOTE: Concerning security aspects, whilst authentication and membership checking of mobile call originators and of mobile uplink users can be carried out, it is not possible to authenticate service subscribers in group receive mode if they have not before established a dedicated connection to respond to a notification. No equivalent of a group TMSI is provided to protect the "identity" of established voice group calls.

#### 4.2.2.2 Exceptional procedures

When a talking subscriber's mobile station loses contact with the network, the network must detect this loss and set the uplink free so that other mobile stations may access the uplink. The talking subscriber's mobile station which has lost the contact with the network shall return immediately to the group receive mode.

If a mobile station in group receive mode indicates a failure due to radio link time-out, the mobile station shall behave as specified in GSM 05.08 and go back to idle mode, possibly in another cell, as determined by the cell re-selection algorithm. If a notification is received for the same call, the mobile station shall try to reconnect.

#### 4.2.3 Leaving of a group call without termination

A service subscriber can leave the voice group call at any point by "deselecting" it via an MMI function. Having deselected the voice group call the mobile station returns to idle mode and "ignores" any further notification messages related to that voice group call.

NOTE: If a service subscriber does not wish to participate in calls to a particular group ID for long periods of time, the group ID shall be switched to deactive state by the subscriber.

The service subscriber shall have the capability to reselect the voice group call. The mobile station shall not ignore notification messages to that call any more.

The dispatcher shall be able to leave a voice group call without terminating it.

#### 4.2.4 Group call termination

A voice group call can only be terminated by the calling subscriber or by an entitled dispatcher or due to no activity timer expiry (see subclause 8.1.2.3).

The calling subscriber can terminate the call only if the calling subscriber has access to the uplink. He shall remain the calling subscriber during the length of the particular voice group call even if he leaves the call and then returns to it later.

The dispatcher can terminate the call by a network defined user operation (e.g. via DTMF).

#### 4.2.5 Acknowledgements

The acknowledgement is an application option.

For voice group calls which are identified by an acknowledgement flag mobile stations which have acknowledgement facilities have to return an acknowledgement message with a predefined content in a predefined manner.

The acknowledgement shall be sent using an appropriate data service, to a predefined address or with a predefined short code stored on the SIM card. The network may apply geographical routing to a predefined acknowledgement service centre.

#### 4.2.6 Transactions between the mobile station and the network

Mobile stations which are in group receive mode shall not perform any transactions with the network while adjusted to the voice group call channel. They shall leave the group receive mode and act in a standard way to perform any transaction if necessary and return to the voice group call afterwards.

Mobile stations which have access to the voice group call channel uplink shall not perform any transactions for supplementary services and SMS.

## 5 General architecture


### 5.1 Group Call Register (GCR)

The general architecture of GSM is maintained. In addition, a network function is required which is used for registration of the group call attributes, the Group Call Register (GCR).

The GCR function is mainly a database function, holding information about voice group calls.

NOTE 1: The GCR implementation is not specified. It may be realized e.g. as a new network node, in a PABX directly attached to an MSC, inside an MSC or as an HLR. The interface between the GCR function and other functions is not specified in the GSM technical specifications. As a consequence, the functional split between MSC and GCR as developed in this document is only indicative, and other functional splits can be implemented.

The GCR data for a specific voice group call is set at the creation of the group call attributes, and can be subsequently modified. No support for these functions is specified in the GSM technical specifications.

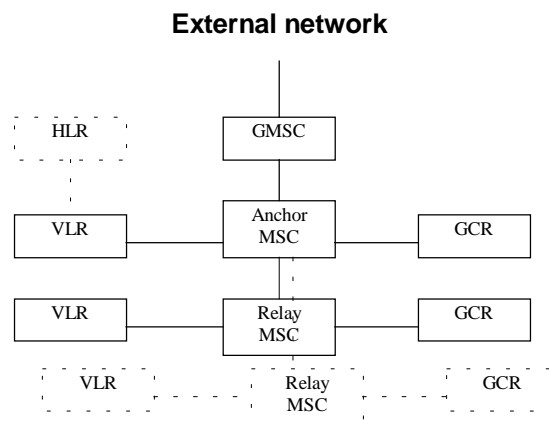

**Figure 1: Functional architecture with a Group Call Register**

The signalling between the entities shown in figure 1, for the two cases of service subscriber and dispatcher originated calls, shall be as defined in the following.

**Service subscriber originated:** The MSC containing the cell within which this voice group call is initiated shall perform subscription checking against VLR records. It shall then consult its GCR to determine the group call attributes related to its MSC area and whether it is the group call anchor MSC for that voice group call. If it is not, the GCR shall provide with the group call attributes the routing information identifying the group call anchor MSC. The originating MSC shall then route the voice group call to the anchor MSC. If the originating MSC is the group call anchor MSC, along with the group call attributes, the GCR shall provide information on all group call relay MSCs to be involved.

The group call anchor MSC shall set up links to all group call relay MSCs. Each MSC involved in a voice group call obtains its proper group call attributes from the GCR related to the MSC.

The IMSI of the calling service subscriber must be provided to and stored in the anchor MSC and each relay MSC in order to allow the originator to clear the group call later on.

**Dispatcher originated:** In the case of dispatchers calling from an external network, the call request, in the form of an ISDN number, shall be received at a GMSC. The number shall be analysed and the call shall be directly routed to the group call anchor MSC by the GMSC based on the called identity without requesting an HLR. The group call anchor MSC shall interrogate the GCR and obtain the group call attributes. If an identical voice group call is currently in progress, the dispatcher shall be connected to this call and no new call shall be initiated. When interrogating the GCR, the identity of the dispatcher is compared with the list of dispatchers which are allowed to initiate the call. If the dispatcher is not in the list, or an identity is not provided, the network shall reject the call.

NOTE 2: Optionally dispatchers may also be user of the GSM network in which the VGCS service is provided or may directly be connected to a PABX containing the GCR. Dispatcher which are registered for a certain voice group call and which have also a subscription for VGCS with the same group ID as the voice group call for which they are dispatcher shall deactivate this group ID when they are located in the corresponding group call area in order to avoid conflicts between paging for the dispatcher and notifications for the group ID.