

SLOVENSKI STANDARD
oSIST prEN ISO 21920-1:2020
01-april-2020

**Specifikacija geometrijskih veličin izdelka (GPS) - Tekstura površine: profil - 1. del:
Označevanje površinskih tekstur (ISO/DIS 21920-1:2020)**

Geometrical product specifications (GPS) - Surface texture: Profile - Part 1: Indication of surface texture (ISO/DIS 21920-1:2020)

Geometrische Produktspezifikation (GPS) - Oberflächenbeschaffenheit: Profile - Teil 1: Angabe der Oberflächenbeschaffenheit (ISO/DIS 21920-1:2020)

Spécification géométrique des produits (GPS) - État de surface: Méthode du profil - Partie 1: Indication des états de surface (ISO/DIS 21920-1:2020)

<https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-44de5c529c1c/osist-pr-en-iso-21920-1-2020>

Ta slovenski standard je istoveten z: prEN ISO 21920-1

ICS:

17.040.20	Lastnosti površin	Properties of surfaces
17.040.40	Specifikacija geometrijskih veličin izdelka (GPS)	Geometrical Product Specification (GPS)

oSIST prEN ISO 21920-1:2020

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN ISO 21920-1:2020](https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020)

<https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020>

DRAFT INTERNATIONAL STANDARD

ISO/DIS 21920-1

ISO/TC 213

Secretariat: BSI

Voting begins on:
2020-02-19Voting terminates on:
2020-05-13

Geometrical product specifications (GPS) — Surface texture: Profile —

Part 1: Indication of surface texture

*Spécification géométrique des produits (GPS) — État de surface: Méthode du profil —
Partie 1: Indication des états de surface*

ICS: 17.040.40

iTeh STANDARD PREVIEW (standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.

ISO/CEN PARALLEL PROCESSING



Reference number
ISO/DIS 21920-1:2020(E)

© ISO 2020

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 21920-1:2020](https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020)

<https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Foreword	v
Introduction.....	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Tolerance acceptance rules	1
4.1 General.....	1
4.2 Maximum tolerance acceptance rule	1
4.3 16% tolerance acceptance rule.....	2
4.4 Median tolerance acceptance rule	2
5 Criteria for indication of profile surface texture	3
5.1 General.....	3
5.2 Mandatory indication to be explicitly specified.....	3
5.3 Optional indication to specify default deviating requirements	3
6 Indication of profile surface texture	4
6.1 General.....	4
6.2 Graphical symbol.....	4
6.3 Minimal indication.....	5
6.3.1 General.....	5
6.3.2 Minimal indication for parameter with defined defaults.....	5
6.3.3 Minimal indication for functional parameter and parameter without defined defaults.....	5
6.4 Complete indication	6
6.4.1 General.....	6
6.4.2 Complete indication for non section length based R- parameter	7
6.4.3 Complete indication for section length based R- parameter.....	8
6.4.4 Complete indication for non section length based P- and W- parameter	9
6.4.5 Complete indication for section length based P- and W- parameter.....	10
7 Determinations for the indication of profile surface texture.....	10
7.1 General.....	10
7.2 Graphical symbol for surface tolerance	11
7.3 Surface profile parameter	11
7.4 Limit of surface parameter	11
7.5 Tolerance types.....	11
7.6 Profile s-filter type	11
7.7 Profile s- filter nesting index.....	11
7.8 Profile L-filter type (for R-parameter) or profile S-filter type (for W-parameter)	12
7.9 Profile L- filter nesting index (for R- parameter) or profile S-filter nesting index (for W-parameter)	12
7.10 Evaluation length.....	12
7.11 Section length	12
7.12 Number of sections	12
7.13 Profile F-operator type.....	12
7.14 Profile F-operator nesting index.....	13
7.15 Method of profile extraction	13
7.16 Profile direction.....	13
7.17 Symbol 'OR(n)' to specify other requirements	13
7.18 Symbol 'Scn'	13

ISO/DIS 21920-1:2020(E)

7.19	Symbol 'Tmax'	14
7.20	Symbol 'T16%'	14
7.21	Symbol 'Tmed'	14
7.22	Surface lay and direction of lay	14
7.23	Manufacturing process	14
8	Position on technical product documentation	14
8.1	General	14
8.2	Position and orientation of the graphical symbol	14
9	Additional and simplified indications	18
9.1	Restrictive specifications	18
9.2	Identical specifications of a number of identical feature elements	18
9.3	Indication of the profile direction relatively to a workpiece feature	19
9.4	Indication of bilateral surface profile tolerances	20
9.5	Simplified indications	20
9.5.1	General	20
9.5.2	Majority of features with identical requirements	20
9.5.3	Indication by the graphical symbol combined with a letter	21
9.6	Indication of different requirements for several, additional stages of a feature	21
Annex A (normative)	Proportions and dimensions of graphical symbols	23
A.1	General requirements	23
A.2	Proportions	23
A.3	Dimensions	24
Annex B (normative)	Graphical symbols for the indication of surface lay or direction of lay	25
Annex C (normative)	Graphical symbols for the indication of the profile direction	26
Annex D (normative)	Filter symbols for profile surface texture	27
Annex E (normative)	Non-filter association (F-operator) symbols	28
Annex F (informative)	Indications for unambiguous surface profile specification	29
F.1	Examples for R-parameter specifications	30
F.2	Examples for W-parameter specifications	40
F.3	Examples for P-parameter specifications	43
F.4	Examples for several parameter specifications	46
Annex G (normative)	Use of the 16% tolerance acceptance rule	47
Annex H (informative)	Criteria for the use of the Tmax tolerance acceptance rule as a default	48
Annex I (informative)	New and changed issues to former versions	49
Annex J (informative)	Relation with the GPS matrix	51
J.1	General	51
J.2	Information about this part of ISO 21920 and its use	51
J.3	Position in the GPS matrix model	51
J.4	Related International Standards	51
Bibliography	52

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is Technical Committee ISO/TC 213, *Dimensional and geometrical product specifications and verification*.

This edition cancels and replaces the edition of ISO 1302:2002, which has been technically revised.

The main changes compared to the edition of ISO 1302:2002 are as follows:

- new criteria for indication are defined
- Tmax rule is the default tolerance acceptance rule

A list of all parts in the ISO 21920 series can be found on the ISO website.

ISO/DIS 21920-1:2020(E)**Introduction**

This part of ISO 21920 is a geometrical product specification (GPS) standard and is to be regarded as a general GPS standard (see ISO 14638). It influences the chain link C of the chains of standards on profile and areal surface texture.

The ISO/GPS matrix model given in ISO 14638 gives an overview of the ISO/GPS system of which this part of ISO 21920 is a part. The fundamental rules of ISO/GPS given in ISO 8015 apply to this part of ISO 21920 and the default decision rules given in ISO 14253-1 apply to the specifications made in accordance with this part of ISO 21920, unless otherwise indicated.

For more detailed information of the relation of this part of ISO 21920 to other standards and the GPS matrix model, see Annex J.

This part of ISO 21920 covers the indication of profile surface texture.

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[oSIST prEN ISO 21920-1:2020](https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020)

<https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020>

Geometrical product specifications (GPS) — Surface texture: Profile — Part 1: Indication of surface texture

1 Scope

This part of ISO 21920 specifies the rules for indication of profile surface texture in technical product documentation by means of graphical symbols. The indications of profile surface texture define requirements to the surface of a workpiece as well as the measurands for verification.

This part of ISO 21920 is only valid for profile surface texture requirements based on a single workpiece.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21920-2:2019 *Geometrical product specifications (GPS) — Surface texture: Profile — Part 2: Terms, definitions and surface texture parameters*

ISO 21920-3:2019 *Geometrical product specifications (GPS) — Surface texture: Profile — Part 3: Specification operators*

ITh STANDARD PREVIEW
(standards.iteh.ai)

3 Terms and definitions

oSIST prEN ISO 21920-1:2020
<https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-11e62f0c5a/iso-21920-1-2020>

For the purposes of this document, the terms and definitions given in ISO 21920-2 and ISO 21920-3 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Tolerance acceptance rules

4.1 General

Tolerance acceptance rules define the process of approval of a workpiece regarding its tolerance limits due to the measured value(s) of parameter(s). For profile surface texture three tolerance acceptance rules can be indicated.

4.2 Maximum tolerance acceptance rule

The maximum tolerance acceptance rule does not allow the tolerance limit of a parameter to be exceeded. The symbol of the Maximum tolerance acceptance rule is shown in Figure 1.

Tmax

Figure 1 — Symbol of the maximum tolerance acceptance rule

ISO/DIS 21920-1:2020(E)

The maximum tolerance acceptance rule is the default case and valid with or without indication of the 'Tmax' symbol.

NOTE: The 'Tmax' symbol can be used for a higher clarity of a specification

4.3 16% tolerance acceptance rule

A specified 16% tolerance acceptance rule allows at most approximately 16 % of all measured values of a parameter to exceed the tolerance limit. The symbol of the 16% tolerance acceptance rule is shown in Figure 2.

The use of the 16% tolerance acceptance rule and the required number of measurements are defined in Annex G.

T16%

Figure 2 — Symbol of the 16% tolerance acceptance rule

The 16% tolerance acceptance rule is valid for the parameter on the line where the 'T16%' symbol is indicated.

If a bilateral tolerance is specified in one line approximately 16 % of all measured values may violate the upper limit and approximately 16 % of all measured values may violate the lower limit.

NOTE 1: The 16% tolerance acceptance rule is an instruction for the approval of a workpiece based on measured values regarding its tolerance limits.

NOTE 2: In former versions the 16% tolerance acceptance rule was named as simplified 16% rule.

NOTE 3: In contrast to former versions the 16% tolerance acceptance rule is not the default case (see Annex H for background)

4.4 Median tolerance acceptance rule

If a median tolerance acceptance rule is specified the median value of all measured values of a parameter has to meet the tolerance limits. The symbol of the Tmed tolerance acceptance rule is shown in Figure 3.

Tmed

Figure 3 — Symbol of the median tolerance acceptance rule

The Tmed tolerance acceptance rule is valid for the parameter on the line where the 'Tmed' symbol is indicated.

NOTE 1: The median tolerance acceptance rule is an instruction for the approval of a workpiece based on measured values regarding its tolerance limits.

NOTE 2: If the median value of all measured values of a parameter meets the tolerance limits the number of measured values violating the limit(s) is not determined.

NOTE 3: The use of the median tolerance acceptance rule requires a minimal number of three measured values of a parameter. A higher number of measurements can be specified by the OR(n) requirements.

5 Criteria for indication of profile surface texture

5.1 General

Indications of profile surface texture define requirements on the surface of a workpiece as well as the measurands for verification.

NOTE: All criteria permitted for indications of profile surface texture are listed in Clauses 5.2 to 5.4 and described in Clause 7.

5.2 Mandatory indication to be explicitly specified

- Graphical symbol for profile surface tolerance
- Symbol of the surface profile parameter
- For functional parameter and for all parameter without defined defaults: indication of the profile L-filter nesting index for R- parameters or profile S-filter nesting index for W- parameters or the setting class number
- Limit of the surface profile parameter

NOTE 1: The indication of the nesting index or the setting class number is optional for all parameter listed in Table 3 or Table 6 of ISO 21920-3.

NOTE 2: It is the task of the design office to choose and indicate the functionally valid L-filter or S-filter according to earlier experience or performed testing results. The Tables 3 to 6 in ISO 21920-3 are based on extensive experience and define defaults on surfaces with low or normal functional requirements.

<https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e529c1cf/osist-pr-en-iso-21920-1-2020>

5.3 Optional indication to specify default deviating requirements

- Tolerance type (upper, lower or bilateral tolerance limit)
- profile S-filter type
- profile S-filter nesting index
- profile L-filter type for R- parameter or profile S-filter type for W- parameter
- profile L-filter nesting index for R- parameter or profile S-filter nesting index for W- parameter
- evaluation length or for section length based parameter: section length and number of sections
- profile F-operator type and method
- profile F-operator nesting index
- Method of profile extraction
- Profile direction
- Symbol 'OR(n)' to specify other requirements
- Symbol 'Scn' to specify a setting class number

ISO/DIS 21920-1:2020(E)

- Symbol 'T16%' or 'Tmax' or 'Tmed' to specify a tolerance acceptance rule

NOTE: Default settings are defined in ISO 21920-3.

6 Indication of profile surface texture**6.1 General**

Profile surface texture requirements in technical product specifications shall be specified by one of the graphical symbols described in Clause 6.2.

A minimal indication of profile surface texture shall be built up of the graphical symbol, the parameter designation and the parameter limit value, see Clause 6.3.

In case several parameters are specified the parameter in the first line is relevant for the determination of default settings (see ISO 21920-3).

NOTE: Exceptions are defined in 9.4.

6.2 Graphical symbol

The design of the graphical symbols contains requirements on the production process.


NOTE 1: Proportions of graphical symbols are defined in Annex A.

NOTE 2: See Figure 4 for layout of the three defined graphical symbols and its interpretation.

NOTE 2: The bar in front of the symbol is for a better distinction of a profile to an areal specification and to former versions of the standard.



a) any manufacturing process permitted



b) material shall be removed



c) material shall not be removed

Figure 4 — Graphical symbol indicating profile surface texture


6.3 Minimal indication

6.3.1 General

If a minimal indication is specified all defaults shall be applied. Because defaults can not be defined for all parameter the minimal indication is different for parameter with and without defined defaults.

6.3.2 Minimal indication for parameter with defined defaults

Figure 5 shows all symbols and indications mandatory for a minimal indication of profile surface texture requirements and parameter with defined defaults.



Key:

- a symbol for parameter
- b numerical limit value
- < > placeholder has to be specified

Figure 5 — Minimal indication for parameter with defined defaults (all defaults apply)


NOTE 1: Parameter with defined defaults are Ra, Rz, Rmax, Rp, Rv and Pt, see ISO 21920-3, Table 3 and 5.

NOTE 2: Exceptions are defined in 9.4. <https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020>

NOTE 3: See Annex F for examples. <https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020>

6.3.3 Minimal indication for functional parameter and parameter without defined defaults

Figure 6 shows all symbols and indications mandatory for a minimal indication of profile surface texture requirements and parameter without defined defaults. All defaults are defined by the mandatory specified setting class number (Scn) or by the default value of the mandatory profile L-filter nesting index for R- parameters or profile S-filter nesting index for W- parameter.



Key:

- a symbol for parameter
- b numerical limit value
- c symbol for the specified setting class number Scn or a default value of profile L-filter nesting index for R- parameters or profile S-filter nesting index for W- parameter

< > placeholder has to be specified

Figure 6 — Minimal indication for parameter without defined defaults

ISO/DIS 21920-1:2020(E)

- NOTE 1: Parameter without defined default are not listed in Table 3 and Table 5 of ISO 21920-3.
- NOTE 2: For functional parameter (e.g. Rk, Rpk, Rvk) are no default nesting index values defined to consider and indicate a functionally valid profile L-filter nesting index value.
- NOTE 3: The specified setting class number leads directly to the column of the Table 2 of ISO 21920-3 with the relevant default settings.
- NOTE 4: Exceptions are defined in 9.4.
- NOTE 5: See Annex F for examples.

6.4 Complete indication**6.4.1 General**

The criteria specifying profile surface texture described in Clause 5 shall be arranged depending on the profile parameter type as shown in Clauses 6.4.2 to 6.4.6. All criteria for one parameter shall be indicated in one line.


- NOTE 1: In case several parameters or different criteria for the same parameter need to be specified, the indication follows in one or several additional lines.
- NOTE 2: Examples for indications are given in detail in Annex F.
- NOTE 3: The complete indication is shown to define the sequence of the indication of all criteria and may be rarely used in practice.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
 oSIST prEN ISO 21920-1:2020
<https://standards.iteh.ai/catalog/standards/sist/cea9305c-57ee-4d88-800c-4de5e520c1cf/osist-pren-iso-21920-1-2020>

6.4.2 Complete indication for non section length based R- parameter

The criteria specifying the non section length based profile roughness parameter shall be arranged as in Figure 7.

NOTE: Non section based R- parameter are e.g. Ra, Rq, Rt, Rk (see ISO 21920-2).

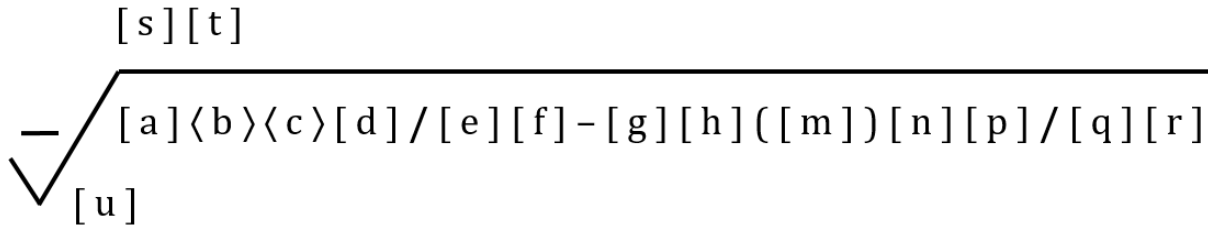

Key:

- a tolerance type
- b symbol for R- parameter
- c numerical limit value of parameter
- d tolerance acceptance rule
- e profile s- filter type
- f profile s- filter nesting index
- g profile L- filter type
- h profile L- filter nesting index
- m evaluation length
- n profile F- operator type and method
- p profile F- operator nesting index
- q method of profile extraction
- r placeholder for the OR(n) – symbol for other requirements
- s manufacturing process
- t surface lay and direction of lay
- u profile direction if indicated relatively to the surface lay

< > placeholder has to be specified

[] placeholder can be specified, if different from the default or an additional requirement

Figure 7 — Indication for non section length based R- parameter including all definable criteria