

---

---

**Test code for machine tools —**

Part 2:

**Determination of accuracy and  
repeatability of positioning of  
numerically controlled axes**

**AMENDMENT 1**

*Code d'essai des machines-outils —*

*Partie 2: Détermination de l'exactitude et de la répétabilité de  
positionnement des axes à commande numérique*

*AMENDEMENT 1*

**PROOF / ÉPREUVE**

---

---



**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/03f10746-550e-4145-9424-bc309b1009e4/iso-230-2-2014-amd-1-2016>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 39, *Machine tools*, Subcommittee SC 2, *Test conditions for metal cutting machine tools*.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/03f10746-550e-4145-9424-bc309b1009e4/iso-230-2-2014-amd-1-2016>

# Test code for machine tools —

## Part 2:

# Determination of accuracy and repeatability of positioning of numerically controlled axes

## AMENDMENT 1

Add Annex E after D.3:

### Annex E

(informative)

#### Least increment step

##### E.1 General

Machine tools are designed to operate over a wide range of feed speeds and travel distances along individual axes of motion. An important aspect of positioning along an individual axis of motion is the resolution of such positioning. This is referred to as least increment step or minimum positioning increment. This capability limits a machine tool's ability to make small corrections in position. These small corrections are necessary for numerical compensations for various sources of positioning errors, such as ballscrew pitch, reversal error, thermal distortions, errors due to geometry, such as straightness, squareness, and parallelism, as well as coordination of axes.

In general, the least increment step may depend on the resolution of the positioning feedback devices, numerical control algorithms, as well as machine construction (e.g. friction, preloads, etc.) and machine condition.

With the least increment step test, the smallest increment at which the machine can position in a specified period of time is determined. This test is typically not included in acceptance testing.

##### E.2 Test conditions

The test setup and procedure described below applies to all axes of linear motion. However, a similar procedure can be used for axes of rotary motion.

Any instrument having small mechanical or electrical hysteresis ( $\leq 20\%$  of the desired least increment step) and a short measuring range can be used to measure the least positioning increment of the axis. Examples include the following:

- laser interferometer with positioning error optics;
- non-contact displacement sensor such as eddy current or capacitive type;
- high resolution LVDT contact measurement device.

The measuring instrument is mounted such that it measures the displacement between the tool and the workpiece. Any tool or workpiece spindle, if applicable, is locked either through servo control or by external mechanism (bracket, magnet, etc.).

The machine axis is programmed to move in 10 steps, each at the specified positioning resolution, in the positive direction with 5 s dwell time after reaching each target. The same ten steps are repeated in the negative direction and then in the positive direction again.


If no motion is detected after ten steps then the entire test is to be repeated increasing the step size.

The least increment step is the maximum absolute value of the difference between the commanded and actual positions plus the positioning resolution (i.e. step size applied for this test).


It is known that the size and direction of approach to the first target can affect the results of this test. To achieve a reproducible test, the magnitude and direction of approach should be agreed and reported.

Alternatively, the test may be performed applying a dynamic acquisition mode, e.g. with a laser interferometer. In this case, the entire test (30 steps) is repeated as the step size is gradually increased until the machine axis positions with clearly definable (countable) steps, where extraneous machine motion due to overshoot, settling, reversal error and vibration does not exceed the commanded step. The step size that first satisfies these criteria is the least increment step. [Figure E.1](#) shows sample results from the least increment step tests.

**ITeH STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/03f10746-550e-4145-9424-bc309b1009e4/iso-230-2-2014-amd-1-2016>

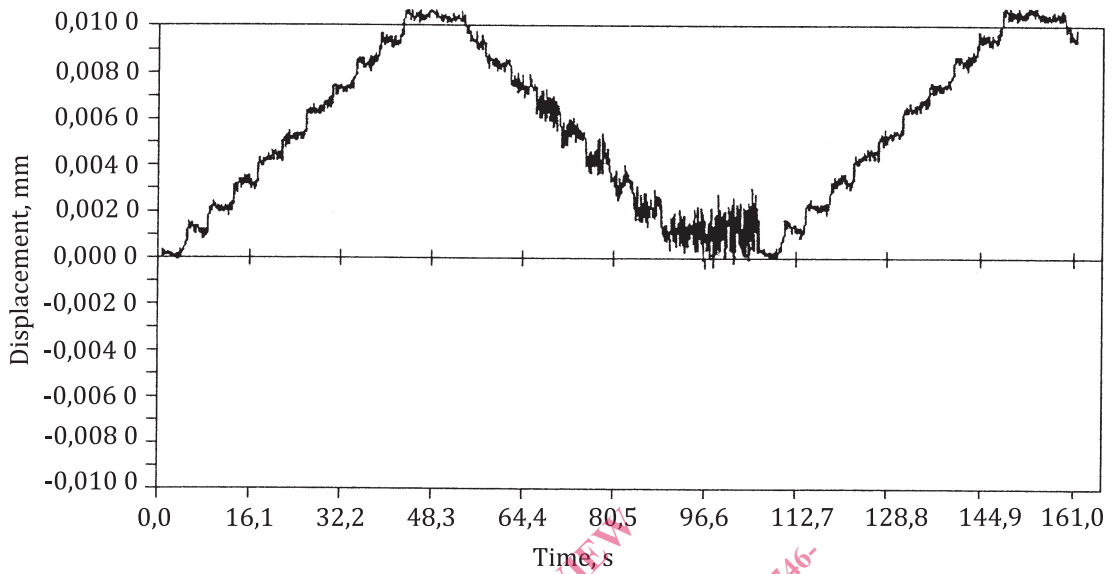

a) Axis not satisfying the criteria of least increment step of 0,001 mm — No clearly definable (countable) steps

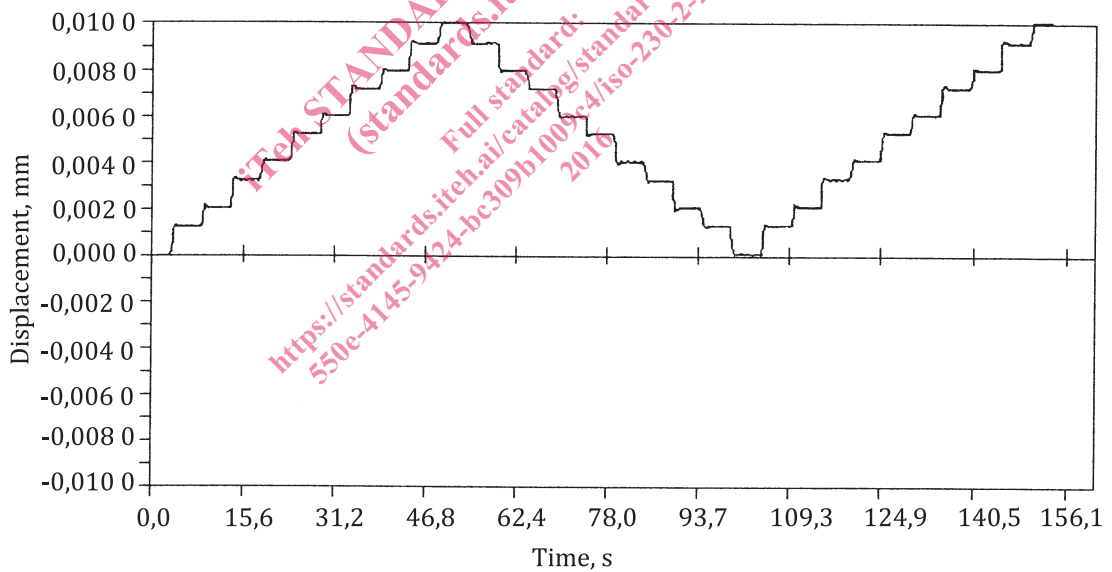

b) Axis satisfying the criteria of least increment step of 0,001 mm — Clearly definable (countable) steps

Figure E.1 — Sample least increment step test results

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/03f10746-550e-4145-9424-bc309b1009e4/iso-230-2-2014-amd-1-2016>