



SLOVENSKI STANDARD SIST EN 951:2000

01-maj-2000

BUXca Yý U
SIST EN 25:1996

Vratna krila - Metoda merjenja višine, širine, debeline in pravokotnosti

Door leaves - Method for measurement of height, width, thickness and squareness

Türblätter - Meßverfahren zur Ermittlung von Höhe, Dicke und Rechtwinkligkeit

Vantaux de portes - Méthode de mesure des hauteur, largeur, épaisseur et équerrage
iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: ~~SIST EN 951:1998~~ EN 951:1998

<https://standards.iteh.ai/catalog/standards/sist/aaf4188b-13f0-4b26-8655-9fb3965333b6/sist-en-951-2000>

ICS:

91.060.50 Vrata in okna Doors and windows

SIST EN 951:2000 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 951:2000

<https://standards.iteh.ai/catalog/standards/sist/aaf4188b-13f0-4b26-8655-9fb3965333b6/sist-en-951-2000>

EUROPEAN STANDARD

EN 951

NORME EUROPÉENNE

EUROPÄISCHE NORM

December 1998

ICS 91.060.50

Supersedes EN 25:1975

Descriptors: door leaves, dimension measurements, height, width, thickness, squareness, defects

English version

Door leaves - Method for measurement of height, width, thickness and squareness

Vantaux de portes - Methode de mesure des hauteur, largeur, épaisseur et équerrage

Türblätter - Meßverfahren zu Ermittlung von Höhe, Dicke, und Rechtwinkligkeit

This European Standard was approved by CEN on 26 November 1998.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 951:2000](https://standards.iteh.ai/catalog/standards/sist/aaf4188b-13f0-4b26-8655-9fb3965333b6/sist-en-951-2000)

<https://standards.iteh.ai/catalog/standards/sist/aaf4188b-13f0-4b26-8655-9fb3965333b6/sist-en-951-2000>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 33 "Doors, windows, shutters and building hardware", the secretariat of which is held by AFNOR.

This European Standard replaces EN 25:1975.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 1999, and conflicting national standards shall be withdrawn at the latest by December 1999.

This standard is one of a series of standards for doors. The test method relates to performance requirements to be published in EN 1529.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 951:2000

<https://standards.iteh.ai/catalog/standards/sist/aaf4188b-13f0-4b26-8655-9fb3965333b6/sist-en-951-2000>

ANNEXE 1
COMITE EUROPEEN DE NORMALISATION
..... 2000



1 Scope

This European standard applies to all rectangular door leaves and the measurable parameters of doors of other shapes.

This standard specifies the method to be used to measure the dimensions of height, width and thickness, and defects of squareness of door leaves.

2 Apparatus

2.1 Measurement instrument for height and width

Steel measuring tape or similar measuring instrument, accurate to 0,5 mm.

2.2 Measurement instrument for thickness

Micrometer or similar measuring instrument accurate to 0,01 mm.

2.3 Measurement instrument for squareness

A metal square having two arms with inside reference dimensions of (500 ± 1) mm. The right angle between the arms shall be accurate to 0,1 mm in 500 mm. The square shall incorporate a dial or digital gauge accurate to 0,1 mm mounted at the 500 mm reference point of one arm (see figure 1).

<https://standards.iteh.ai/catalog/standards/sist/aaf4188b-13f0-4b26-8655-9fb3965323b6/sist-en-951-2000>

NOTE : An additional block and feeler gauges may be used in place of the dial or digital gauge

3 Test specimens

Test specimens shall be stored and tested in a non-destructive environment within the ranges of 15 °C to 30 °C and 25 % to 75 % relative humidity.

Doors which are designed to be glazed, shall be supplied for testing with all glazing carried out in accordance with the door manufacturer's specifications.

4 Procedure

4.1 Height and width measurement

Measure, to the nearest 1 mm, the height and width of each door leaf along lines a-a, b-b, c-c, d-d parallel to, and (20 ± 5) mm from, each edge respectively (see figure 2).

NOTE : In the case of a door leaf with rebated edges, the dimensions of height or width should be measured to the inner edges of the rebates.

4.2 Thickness measurement

Measure the thickness at 6 points located (20 ± 5) mm from the edges and at the positions indicated in figure 2, to the nearest 0,1 mm.

NOTE : If a measuring point occurs where the thickness is not representative of the doors, e.g. because of surface profiles, local adjustment of the measurement position is permitted.

4.3 Squareness measurement

Measure any deviation from squareness of the door leaf at all four corners to the nearest 0,1 mm.

5 Expression of results

Record :


- height and width measurements and maximum deviations in relation to the specified dimensions ;
- thickness measurements and maximum deviation in relation to the specified dimension ;
- the four measured values of deviation from squareness.

6 Test report

The test report shall contain the following information :

- a) reference to this European standard ;
- b) all necessary details to identify the door leaf ;
- c) all relevant details concerning the type, specified dimensions, materials, form and construction of the door leaf ;
- d) laboratory storage and testing conditions ;
- e) the results expressed as in clause 5 ;
- f) name of testing laboratory ;
- g) date of test.

Dimensions in millimetres

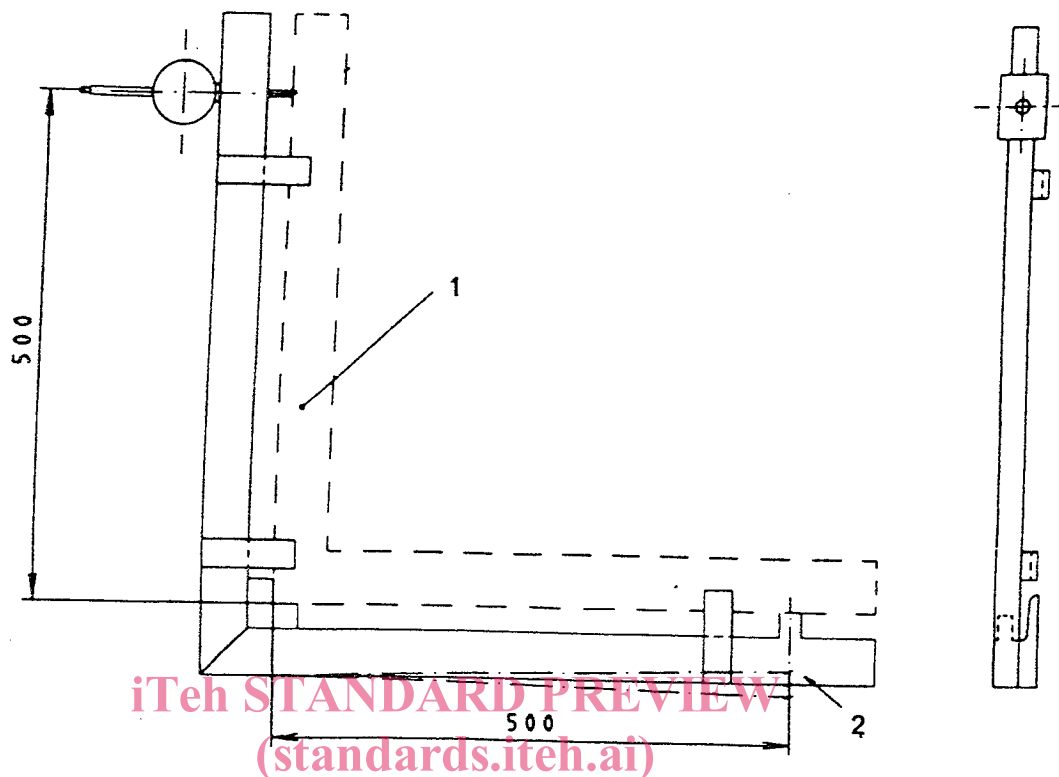

SIST EN 951:2000


<https://standards.iteh.ai/catalog/standards/sist/aaf4188b-13f0-4b26-8655-9fb3965333b6/sist-en-951-2000>

1 Reference square to calibrate the instrument

2 Max. 0,1 mm deviation from squareness

Figure 1 : Measurement instrument for squareness including reference square for calibration

Dimensions in millimetres

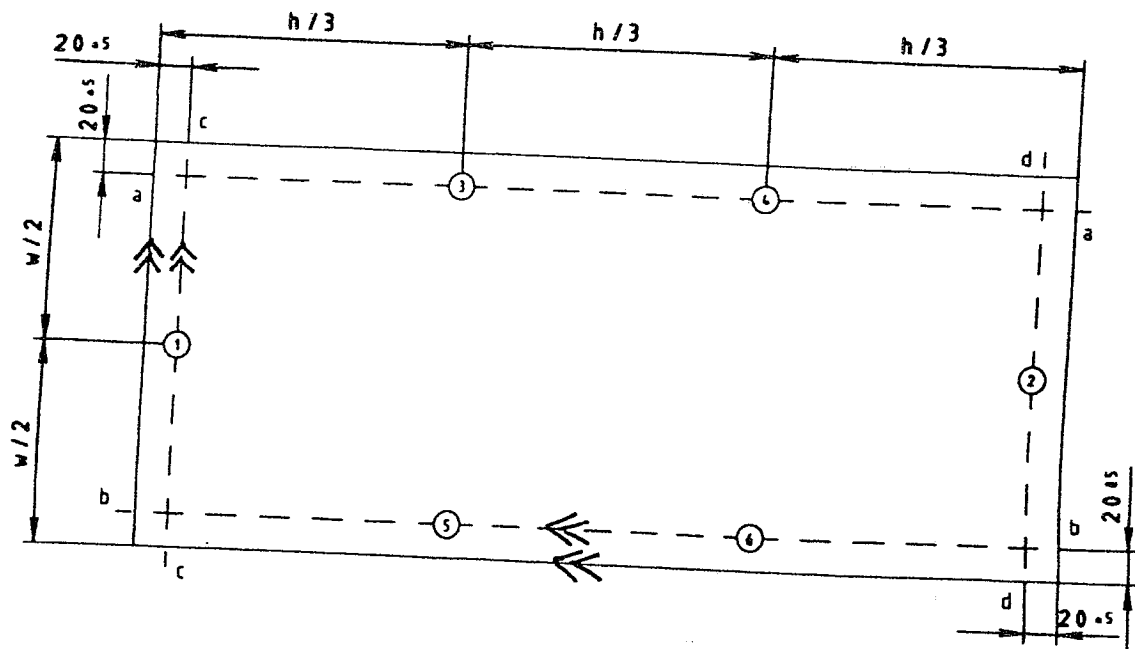

iTeh STANDARD PREVIEW (standards.iteh.ai)

Figure 2 : Measuring points and lines for door leaf

<https://standards.iteh.ai/catalog/standards/sist/aaf4188b-13f0-4b26-8655-9fb3965333b6/sist-en-951-2000>