
**Test conditions for surface grinding
machines with horizontal grinding
wheel spindle and reciprocating
table — Testing of the accuracy —**

Part 1:

**Machines with table length of up to 1
600 mm**

(standards.iteh.ai)

*Conditions d'essai des machines à rectifier les surfaces planes, à
broche porte-meules à axe horizontal — Contrôle de l'exactitude —*

Partie 1: Machines avec une table jusqu'à 1 600 mm de long

<https://standards.iteh.ai/catalog/standards/sist/dd2d366a-0dc1-446c-b448-3d329fcc9821/iso-1986-1-2014>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 1986-1:2014

<https://standards.iteh.ai/catalog/standards/sist/dd2d366a-0dc4-446c-b448-3d329fcc9821/iso-1986-1-2014>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terminology and designation of axes	1
4 Preliminary remarks	2
4.1 Measurement units.....	2
4.2 Reference to ISO 230-1.....	3
4.3 Testing sequence.....	3
4.4 Tests to be performed.....	3
4.5 Measuring instruments.....	3
4.6 Minimum Tolerance.....	3
4.7 Machining tests.....	3
4.8 Diagrams.....	3
5 Geometric tests	4
5.1 Linear axes.....	4
5.2 Table.....	8
5.3 Wheel spindle.....	11
6 Machining tests	15
Annex A (informative) Equivalent terms in other languages	17
Bibliography	18

<https://standards.iteh.ai/catalog/standards/sist/dd2d366a-0dc4-446c-b448-3d329fcc9821/iso-1986-1-2014>
 ISO 1986-1:2014

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 39, *Machine tools*, Subcommittee SC 2, *Test conditions for metal cutting machine tools*.

This second edition cancels and replaces the first edition (ISO 1986-1:2001), which has been technically revised.

ISO 1986 consists of the following parts, under the general title *Test conditions for surface grinding machines with horizontal grinding wheel spindle and reciprocating table — Testing of the accuracy*:

— *Part 1: Machines with a table length of up to 1 600 mm*

Test conditions for surface grinding machines with horizontal grinding wheel spindle and reciprocating table — Testing of the accuracy —

Part 1: Machines with table length of up to 1 600 mm

1 Scope

This part of ISO 1986 specifies, with reference to ISO 230-1, both geometric and machining tests on general purpose and normal accuracy surface grinding machines with reciprocating table up to 1 600 mm table length and horizontal grinding wheel spindle. It also specifies the applicable tolerances corresponding to the above-mentioned tests.

It is not applicable to surface grinding machines with fixed or rotating tables or to machines having longitudinal traverse of the wheelhead.

This part of ISO 1986 deals only with the verification of the accuracy of the machine; it does not apply to the testing of the machine operation (vibrations, abnormal noises, stick-slip motion of components, etc.), nor to the machine characteristics (such as speeds, feeds, etc.), which should generally be checked before testing the accuracy.

This part of ISO 1986 provides the terminology used for the principal components of the machine and indicates the designation of the axes with reference to ISO 841.

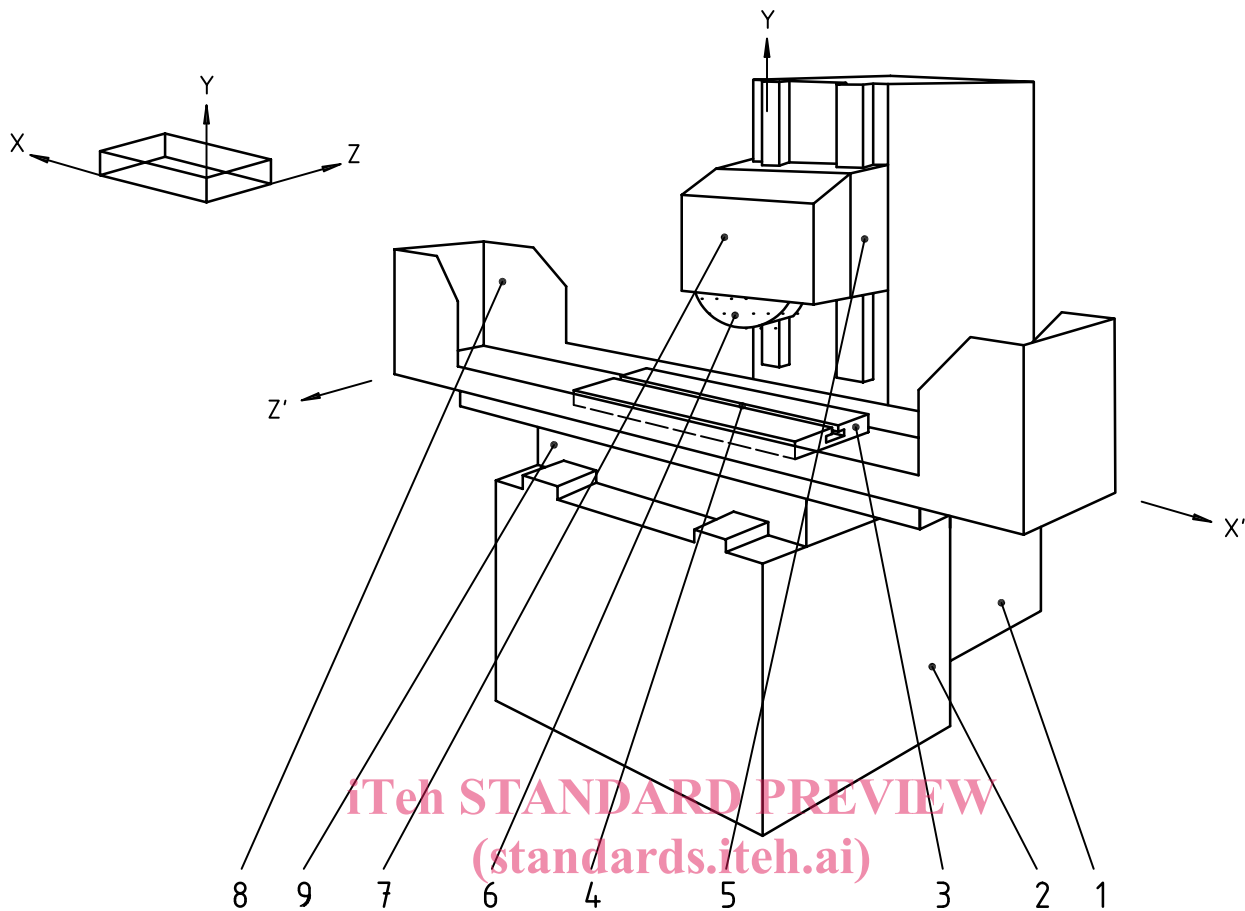
2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 230-1:2012, *Test code for machine tools — Part 1: Geometric accuracy of machines operating under no-load or quasi-static conditions*

3 Terminology and designation of axes

See [Figure 1](#) and [Table 1](#).



NOTE For the key, see [Table 1](#).

ISO 1986-1:2014

<https://standards.iteh.ai/catalog/standards/sist/dd2d366a-0dc4-446c-b448-3d329fcc9821/iso-1986-1-2014>

Figure 1 — Schematic of surface grinding machine with horizontal wheel spindle and reciprocating table

Table 1 — Terminology for surface grinding machines (Key for [Figure 1](#))

	English	French
1	Column	Montant
2	Bed	Banc
3	Table	Table
4	Reference T-slot	Rainure en T de positionnement
5	Wheelhead	Poupée porte-meule
6	Grinding wheel	Outil à rectifier
7	Wheel guard	Carter de protection
8	Splash guard	Protection
9	Saddle	Chariot transversal

4 Preliminary remarks

4.1 Measurement units

In this part of ISO 1986, all linear dimensions, deviations, and corresponding tolerances are expressed in millimetres. All angular dimensions are expressed in degrees. Angular deviations are, in principle,

expressed in ratios (e.g. 0,00x/1 000), but in some cases, microradians, or arcseconds can be used for clarification purposes. The following expression is used for conversion of the units of angular deviations and angular tolerances:

$$0,010/1\ 000 = 10\ \mu\text{rad} \approx 2''$$

4.2 Reference to ISO 230-1

To apply this part of ISO 1986, reference shall be made to ISO 230-1, especially for the installation of the machine before testing, warming up of the spindle, and other moving components, description of measuring methods, and recommended uncertainty of testing equipment.

In the “Observations” block of the tests described in [Clauses 5](#) and [6](#), the instructions are preceded by a reference to the corresponding Clause in ISO 230-1 in cases where the test concerned is in compliance with the specifications of that International Standard.

4.3 Testing sequence

The sequence in which the tests are presented in this part of ISO 1986 in no way defines the practical order of testing. In order to make the mounting of fixtures and machining easier, tests can be performed in any order.

4.4 Tests to be performed

When testing a machine, it is not always necessary or possible to carry out all the tests described in this part of ISO 1986. When the tests are required for acceptance purposes, it is up to the user to choose, in agreement with the supplier/manufacturer, those tests relating to the components and/or the properties of the machine which are of interest. These tests are to be clearly stated when ordering a machine. A mere reference to this part of ISO 1986 for the acceptance tests, without specifying the tests to be carried out, and without agreement on the relevant expenses, cannot be considered as binding for any contracting party.

4.5 Measuring instruments

The measuring instruments indicated in the tests described in [Clause 4](#) are examples only. Other instruments measuring the same quantities and having the same or smaller measurement uncertainty can be used.

4.6 Minimum Tolerance

When the tolerance for a geometric test is established for a measuring length different from that given in this part of ISO 1986 (see 4.1 of ISO 230-1:2012), it shall be taken into consideration that the minimum value of tolerance is 0,001 mm.

4.7 Machining tests

Machining tests shall be made under finishing conditions only, not with roughing cuts which are liable to generate appreciable cutting forces.

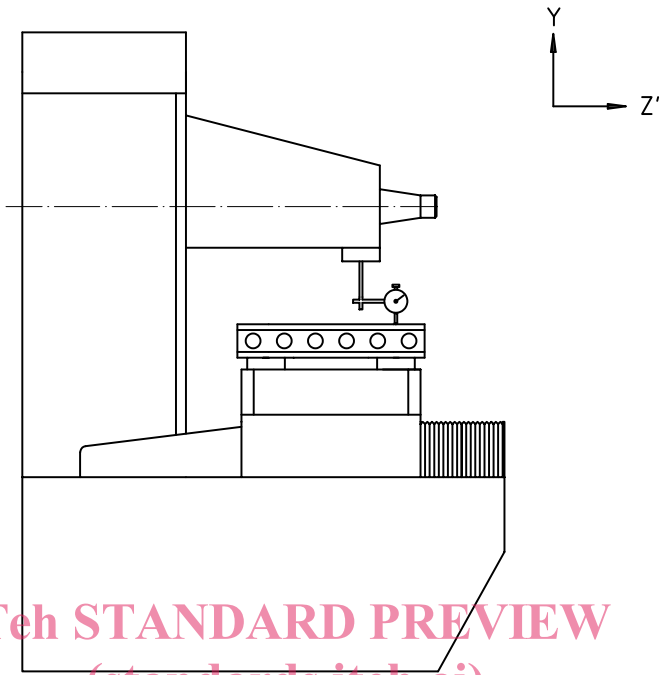
4.8 Diagrams

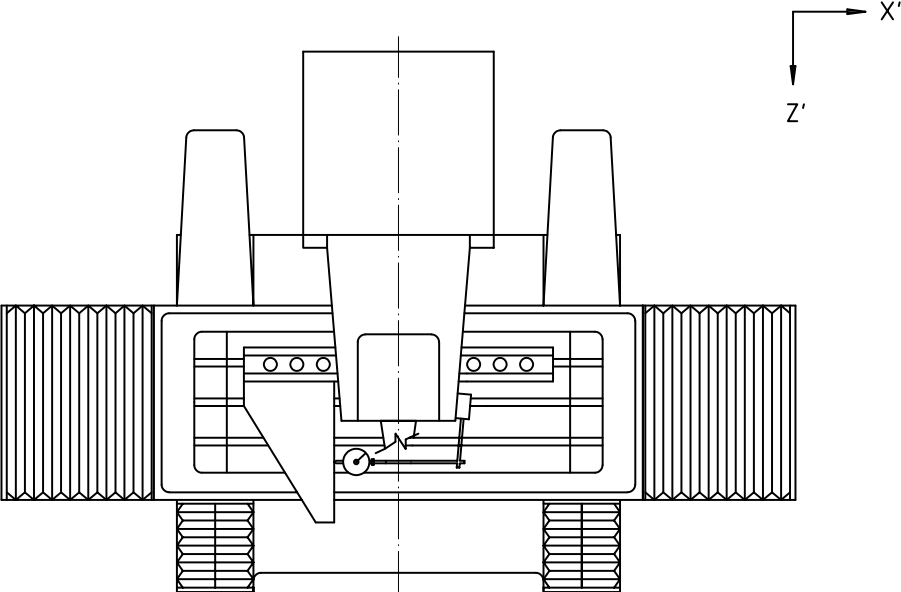
For reasons of simplicity, the diagrams in this part of ISO 1986 illustrate only one type of machine.

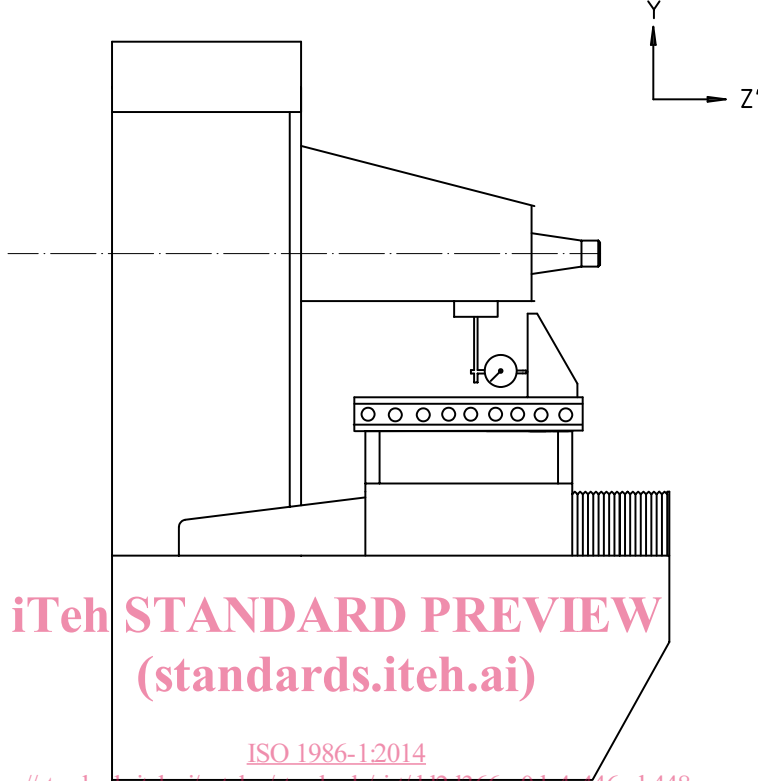
5 Geometric tests

5.1 Linear axes

<p>Object</p> <p>Checking of straightness of the longitudinal (X-axis) movement of the table</p> <p>a) in the vertical XY-plane, and</p> <p>b) in the horizontal ZX-plane</p>		<p>G1</p>
<p>Diagram</p> <p style="text-align: center;">a) b)</p>		
<p>Tolerance</p> <p>For a) and b): 0,010 for a measuring length up to 1 000 0,016 for a measuring length exceeding 1 000 Local tolerance: 0,005 for any measuring length of 300</p>		<p>Measured deviation</p>
<p>Measuring instruments</p> <p>Straightedge and dial gauge, alignment telescope, laser interferometer, or taut wire, and microscope [for b) only]</p>		
<p>Observations and references to ISO 230-1:2012, 3.4.8, 8.2.2.1, and 8.2.3</p> <p>Adjust the straightedge to obtain similar readings at each end of the measuring length. The dial gauge support shall be placed on a fixed part of the wheelhead, the stylus touching the straightedge.</p>		

<p>Object</p>	<p>G2</p>
<p>Checking of the straightness of the transverse movement of the saddle or column or wheelhead (Z-axis) in the vertical YZ-plane</p>	
<p>Diagram</p> 	
<p>Tolerance</p> <p>0,010 for a measuring length of up to 500 ISO 1986-1:2014</p> <p>0,015 for a measuring length exceeding 500 http://standards.iteh.ai/catalog/standards/sist/dd2d366a-0dc4-446c-b448-3d329fcc9821/iso-1986-1-2014</p> <p>Local tolerance: 0,005 over any measuring length of 300</p>	<p>Measured deviation</p>
<p>Measuring instruments</p> <p>Straightedge and dial gauge, alignment telescope, or laser interferometer</p>	
<p>Observations and references to ISO 230-1:2012, 3.4.8, 8.2.2.1, and 8.2.3</p> <p>Adjust the straightedge to obtain similar readings at each end of the measuring length.</p> <p>The dial gauge support shall be placed on a fixed part of the wheelhead, the stylus touching a straightedge.</p>	

Object	G3
<p>Checking of squareness between the longitudinal (X-axis) movement of the table and the transverse movement (Z-axis) of the saddle or column or wheelhead.</p>	
<p>Diagram</p> 	
<p>Tolerance 0,1/1 000 (0,03/300)</p>	<p>Measured deviation</p>
<p>Measuring instruments Straightedge, square, and dial gauge</p>	
<p>Observations and references to ISO 230-1:2012, 10.3.2 The dial gauge shall be placed on a fixed part of the wheelhead. Place a straightedge parallel to the longitudinal movement of the table and then place the table in its central position. Place a square in contact with the straightedge. Check the transverse movement of the saddle or column or wheelhead.</p>	

Object	G4
<p>Checking of the squareness between the vertical movement of the wheelhead (Y-axis) and the transverse movement of saddle or column or wheelhead (Z-axis).</p>	
<p>Diagram</p> 	
<p>Tolerance 0,133/1 000 (0,04/300)</p>	<p>Measured deviation</p>
<p>Measuring instruments Dial gauge and square, straightedge, and gauge blocks</p>	
<p>Observations and references to ISO 230-1:2012, 10.3.2 The dial gauge shall be placed on a fixed part of the wheelhead. Place a straightedge parallel to the transverse movement of the table and then place the table in its central position. Place a square in contact with the straightedge. Check the vertical movement of the wheelhead.</p>	