



SLOVENSKI STANDARD SIST EN 1080:1998

01-april-1998

JUfcj UbY YUXYnUcIfc_Y

Impact protection helmets for young children

Stoßschutzhelm für Kleinkinder

Casques de protection contre les chocs pour jeunes enfants

Ta slovenski standard je istoveten z: EN 1080:1997

[SIST EN 1080:1998](https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f92812/sist-en-1080-1998)

<https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f92812/sist-en-1080-1998>

ICS:

13.340.20	Varovalna oprema za glavo	Head protective equipment
97.190	Otroška oprema	Equipment for children

SIST EN 1080:1998

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 1080:1998

<https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f92812/sist-en-1080-1998>

ICS 13.340.20; 97.190

Descriptors: children, games, bicycles, accident prevention, helmets, specifications, equipment specifications, shock resistance, fastenings, dimensions, tests, marking, information

English version

Impact protection helmets for young children

Casques de protection contre les chocs pour
jeunes enfants

Stoßschutzhelm für Kleinkinder

This European Standard was approved by CEN on 1997-01-09. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Contents

Foreword	3
Introduction	3
1 Scope	4
2 Normative references	4
3 Definitions	4
4 Requirements	5
5 Testing	8
6 Marking	17
7 Information supplied by the manufacturer	17
Annex A (informative) Alternative procedure for artificial ageing	19
Annex ZA (informative) Clauses of this European Standard addressing essential requirements or other provisions of EC Directives	20

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 1080:1998](https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f92812/sist-en-1080-1998)
<https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f92812/sist-en-1080-1998>

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 158 "Head protection", the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by September 1997, and conflicting national standards shall be withdrawn at the latest by September 1997.

This European Standard has been prepared under a Mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this standard.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Introduction

This European Standard specifies requirements for helmets intended for use by children under the age seven while pursuing activities in motor vehicle free environments which have proven risks of head injuries.

The helmet itself is not intended to be worn at play in the playground or whilst using playground equipment. Head protection in these areas is covered by standards for design of playground equipment and surfaces. Since there is a foreseeable risk of being trapped by the helmet, these helmets are equipped with a self-release mechanism to minimize the risk.

Whilst these helmets offer equivalent shock absorption performance they do not meet all the requirements of helmets specifically produced for sports such as pedal cycling, ice hockey, skiing.

The protection given by a helmet depends on the circumstances of the accident and wearing a helmet cannot always prevent death or long term disability.

A proportion of the energy of an impact is absorbed by the helmet, thereby reducing the force of the blow sustained by the head. The structure of the helmet may be damaged in absorbing this energy and any helmet that sustains a severe blow needs to be replaced even if damage is not apparent.

The technical committee which has prepared this standard realizes that it is of importance for the wearer's comfort and psychrometric performance that a helmet is ventilated. At the time this European standard was prepared no method for measuring the ventilating capacity of a helmet was recognized. For that reason no requirements concerning ventilation or heat transmission have been introduced.

1 Scope

This European Standard specifies requirements and test methods for helmets intended for use by children under the age of seven while pursuing activities in motor vehicle free environments which have proven risks of head injuries.

Requirements and the corresponding methods of test are given for the following:

- construction including field of vision;
- shock absorbing properties;
- retention system properties, including chin strap, fastening devices and self-release system;
- marking and information.

2 Normative references

This European Standard incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 960 Headforms for use in the testing of protective helmets

ISO 6487 : 1987 Road vehicles - Measurement techniques in impact tests -Instrumentation.

3 Definitions

For the purpose of this standard, the following definitions apply:

- 3.1 **protective helmet:** An item to be worn on the head and intended to absorb the energy of an impact thus reducing the risk of injury to the head.
- 3.2 **helmet type:** Category of helmets which does not differ in such essential respects as the materials or dimensions or construction of the helmet, of the retention system or of the protective padding.
- 3.3 **padding:**
- 3.3.1 **protective padding:** A material used to absorb impact energy;
- 3.3.2 **comfort padding:** A lining material provided for the wearer's comfort;
- 3.3.3 **sizing padding:** A lining material used for adjustment of the helmet size.
- 3.4 **retention system:** The complete assembly by means of which the helmet is maintained in position on the head including any devices for adjustment of the system or to enhance the wearer's comfort.
- 3.5 **chin-strap:** Part of the retention system consisting of a strap that passes under the wearer's jaw to keep the helmet in position.

- 3.6 self-release system:** A retention system with a mechanism which releases when loaded with a certain force.
- 3.7 basic plane of the human head:** A plane at the level of the external ear opening (external auditory meatus) and the lower edge of the eye sockets (orbits).
- 3.8 basic plane of a headform:** The plane relative to the headform that corresponds to the basic plane of the human head.
- 3.9 reference plane:** A construction plane parallel to the basic plane of the headform at a distance from it which is a function of the size of the headform.
- 3.10 test area:** The area of the helmet in which impact tests may be conducted which corresponds to the minimum protected area of the human head.

4 Requirements

4.1 Materials

For those parts of the helmet coming into contact with the skin the material used should be known not to undergo appreciable alteration from contact with sweat or with substances likely to be found in toiletries. Materials shall not be used which are known to cause skin disorders.

4.2 Construction

The helmet normally consists of a means of absorbing impact energy and means of retaining the helmet on the head in an accident.

The helmet should be durable and withstand handling.

The helmet shall be so designed and shaped that parts of it (visor, rivets, ventilators, edges, fastening device and the like) are not likely to injure the user in normal use.

Note: Helmets should

- have low weight;
- be ventilating;
- be easy to put on and take off;
- be usable with spectacles;
- not significantly interfere with the ability of the user to hear traffic noise.

ITeH STANDARD PREVIEW

(standards.iteh.ai)

SIST EN 1080:1998

<https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a459b2812/sist-cip-1080-1998>

4.3 Field of vision

When tested according to 5.6 there shall be no occultation in the field of vision bounded by angles as follows (see figure 1):

- horizontally: min 105° from the longitudinal vertical median plane to the left and right hand sides
- upwards: min 25° from the reference plane
- downwards: min 45° from the basic plane

4.4 Shock absorbing capacity

The helmet shall give protection to the user's forehead, rear, sides, temples and crown of the head.

When tested according to 5.3 and 5.4 the peak acceleration shall not, for each impact, exceed 250 g for the velocity of 5,42+0,1 m/s on the flat anvil, and 4,57+0,1 m/s on the kerbstone anvil.

Note : These are theoretically equivalent to 1497 mm and 1064 mm drop heights respectively.

4.5 Durability


After being tested the helmet shall not exhibit damage that could cause significant injury to the wearer (sharp edges, points.)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 1080:1998

<https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f92812/sist-en-1080-1998>

Linear dimensions in millimetres

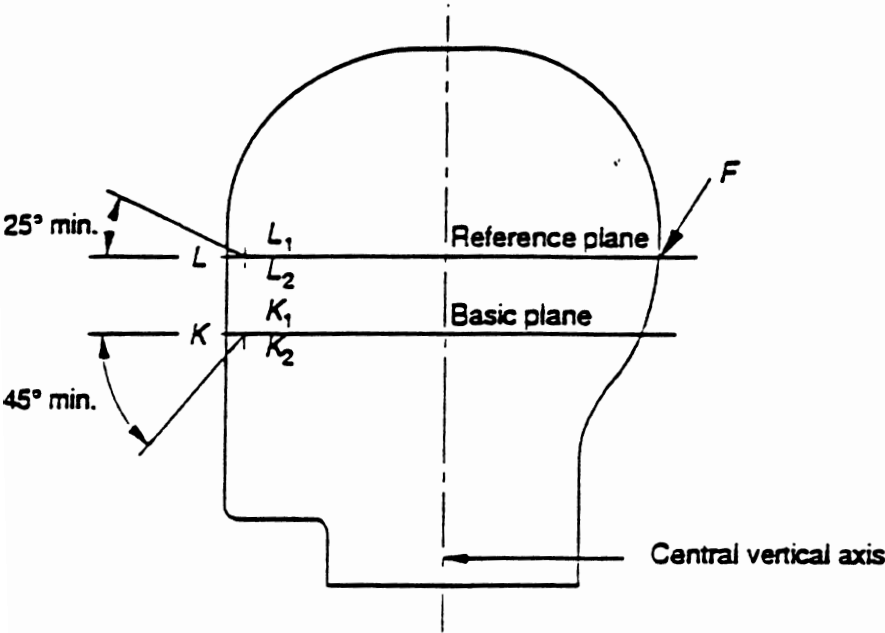

Section of headform in longitudinal vertical plane

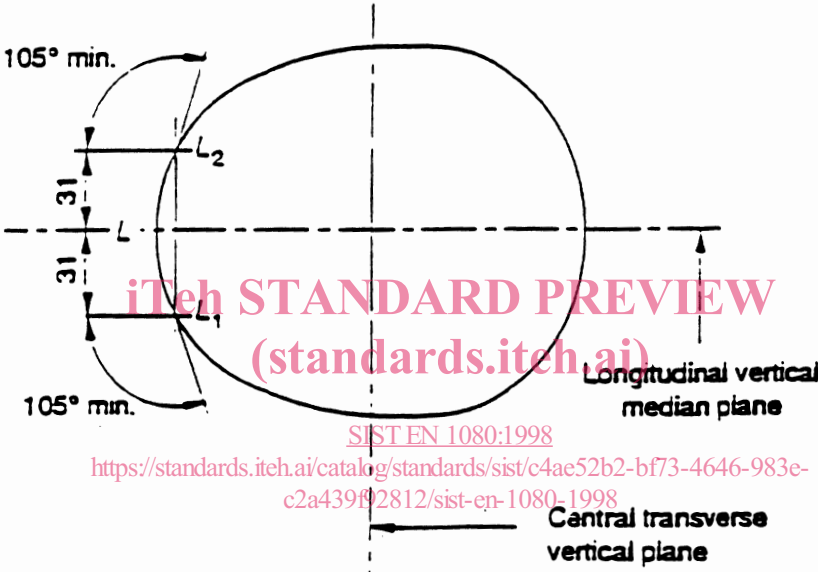


Figure 1: Field of vision

iTeh STANDARD PREVIEW
(standards.itech.ai)
SIST EN 1080:1998
<https://standards.itech.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f02812/sist-en-1080-1998>

4.6 Retention system

4.6.1 General

Means shall be provided for retaining the helmet on the wearer's head. All parts of the retention system fastened to the helmet shall be securely attached.

Buckles with adjustable opening force shall satisfy the requirements of 4.6.5 throughout the range of adjustments.

Note: The design of the self-release mechanism may be such that part of the retention system is not fastened to the helmet.

4.6.2 Chin strap

The chin strap shall not include a chin cup. Any chin strap shall be not less than 15 mm wide. Chin straps may be fitted with means of enhancing comfort for the wearer.

4.6.3 Fastening device

Any retention system shall be fitted with a device to adjust and maintain tension in the system. The device shall be capable of adjustment so that the buckle does not sit on the jaw bone.

4.6.4 Colour

To identify helmets with self-release retention system all or some of the visible parts of the retention system shall be visibly and indelibly coloured green.

4.6.5 Release force

When tested according to 5.5 the headform shall be released from the helmet by a force exceeding 90 N but not exceeding 160 N.

Note: There may be a separate self-release mechanism. Then the release requirement applies to that mechanism.

STANDARD PREVIEW
(standards.iteh.ai)

5 Testing

[SIST EN 1080:1998](https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f92812/sist-en-1080-1998)

5.1 Headforms

<https://standards.iteh.ai/catalog/standards/sist/c4ae52b2-bf73-4646-983e-c2a439f92812/sist-en-1080-1998>

The headforms used shall comply with EN 960. The sizes in table 1 shall be used except for determination of shock absorbing capacity and for the self-release system opening force for which only sizes A, E, J, M and O are available.

For determination of self-release system opening force the headforms used shall comply with EN 960 at least down from the basic plane.

Table 1: Sizes of headforms

Code letter	Inside circumference of helmet, mm
A	500
C	520
E	540
G	560
J	570
K	580
M	600
O	620

5.2 Inspection and determination of mass

Inspect the helmet to ascertain whether it is suitable for its intended purpose and fulfils the general requirements in 4.2.

Determine the mass of the helmets of the same size submitted for testing. Calculate and record the mean value in g rounded off to the nearest 10 g stating the size of the helmet.

5.3 Number of samples and sequence of tests

Four helmets for each headform size, that fits within the manufacturers claimed head size range, for each helmet type shall be submitted for testing.

The sequence of tests performed on each helmet size are given in table 2.

Table 2: Sequence of test and tests per sample

Performance test	Sequence of test	Sample number
Shock absorbing capacity (5.4)	1st	1, 2 and 3
Release force (5.5)	2nd	1, 2 and 3