INTERNATIONAL STANDARD

ISO 19345-2

First edition 2019-05

Petroleum and natural gas industry — Pipeline transportation systems — Pipeline integrity management specification —

Part 2:

Full-life cycle integrity management for offshore pipeline

Industries du pétrole et du gaz naturel — Systèmes de transport par conduites — Spécification de gestion de l'intégrité des conduites —

Partie 2: Gestion de l'intégrité des conduites en mer pendant leur cycle de vie complet

ISO 19345-2:2019

019345-2-2019/https://standards.iteh.ai/catalog/standards/iso/1a528/34-0bd



iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 19345-2:2019

https://standards.iteh.ai/catalog/standards/iso/1a528734-0bd7-4c81-956e-19149609d331/iso-19345-2-2019



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: +41 22 749 01 11 Fax: +41 22 749 09 47 Email: copyright@iso.org Website: www.iso.org

Published in Switzerland

Co	ntent	S		Page			
For	oreword						
Intı	roductio	n		viii			
1							
_	-		eferences				
2							
3		Terms, definitions and abbreviated terms					
	3.1		and definitions				
	3.2	Abbre	viated terms	7			
4							
	4.1		rinciples				
	4.2		ity management program				
		4.2.1	General				
	4.2	4.2.2	Introduction to IMP elements				
	4.3	4.3.1	ity management process elements				
		4.3.1	Data acquisition, review and integrationRisk assessment				
		4.3.3	Inspection and monitoring				
		4.3.4	Integrity assessment				
		4.3.5	Mitigation activity				
		4.3.6	Performance measurement and improvement				
		4.3.7	Emergency response plan				
		4.3.8	Failure management plan	12			
		4.3.9	Remaining life assessment gement elements	12			
	4.4	Manag	gement elements	13			
		4.4.1	Policy and commitment	13			
		4.4.2	Scope of integrity management program	13			
		4.4.3	Organization structure, roles and responsibilities				
		4.4.4	Records and document control plan				
		4.4.5 teh 4.4.5	Communication plan Management of change plan				
		4.4.6	Management of change plan	13			
		4.4.7 4.4.8	Management review and audit plan Training and skill plan				
			•				
5	-	Integrity management for the pipeline lifecycle phases					
	5.1		al				
		5.1.1	Objectives				
	F 2	5.1.2	Principles				
	5.2 5.3	-	elephage for integrity management				
	5.3	5.3.1	cle phases for integrity management				
		5.3.2	Feasibility				
		5.3.3	Design				
		5.3.4	Procurement				
		5.3.5	Fabrication				
		5.3.6	Transportation and storage				
		5.3.7	Integrity during installation				
		5.3.8	Pre-commissioning and commissioning				
		5.3.9	Handover — Preparation for operation				
		5.3.10	Operation and maintenance	19			
		5.3.11	0 1				
		5.3.12	Abandonment	20			
6	Risk	assessm	1ent	20			
-	6.1		tion of objectives and requirements				
			Congral	20			

iii

ISO 19345-2:2019(E)

		6.1.2 Objectives	
		6.1.3 Requirements	
	6.2	Team definition	
	6.3	Segmentation	22
	6.4	Threat identification	23
	6.5	Probability of failure assessment	24
	6.6	Consequence of failure assessment	24
		6.6.1 Consequence assessment	24
		6.6.2 Critical consequence areas analysis	25
	6.7	Risk determination	25
	6.8	Reporting	25
	6.9	Reassessment	26
7	Inch	ection and monitoring	26
•	7.1	Inspection	
	7.1	7.1.1 General	
		7.1.2 Preparation for inspection	
		7.1.3 Requirements of equipment	
		7.1.4 Reporting requirements	
		7.1.5 Review of inspection results	
	7.2	Monitoring	
	7.2	7.2.1 Main monitoring activities	
		7.2.2 Identification and follow-up of available technology	
		7.2.3 Current and vibration monitoring	
		7.2.4 Monitoring of ship traffic and fishing activities	
		7.2.5 Leak detection	
		7.2.6 Review of monitoring data	
8	-	grity assessment 10008.//Standards.iten.all	
	8.1	General	
	8.2	Fitness for purpose	
		8.2.1 Assessment data collection	
		8.2.2 Defect data statistics and causation analysis	
		8.2.3 Assessment method selection	
	8.3	Pressure test	
		8.3.1 General	
		8.3.2 Preconditions for use of pressure-testing on an in-service pipeline	
		8.3.3 Features to be considered for pressure test	37
		8.3.4 Pressure test risks	
		8.3.5 Management measures	
		8.3.6 Monitoring of pressure test procedures	38
		8.3.7 Review of pressure test results	38
		8.3.8 Pressure test report	38
	8.4	Direct assessment	38
		8.4.1 General	
		8.4.2 Direct assessment process	39
		8.4.3 Direct assessment methods	39
		8.4.4 Limitations of direct assessment	39
	8.5	Other assessment	39
9	Mitic	gation	39
,	9.1	General	
	9.2	Internal mitigation methods	
	9.3	External mitigation methods	
	9.4	Corrosion control systems	
	7.4	9.4.1 External corrosion	
		9.4.2 Internal corrosion and erosion	
	9.5	Management of unintended releases	
	9.5 9.6	MAOP reduction	
	2.0	1 ¹ 11 1 C U U C U U I	TT

	9.7 Emergency response		
	9.8	Repair methods	
		9.8.1 Repair methods selection	45
		9.8.2 Detailed procedures	46
10	Perfo	ormance measurement and improvement	47
	10.1	General	47
	10.2	Performance measurement	
	10.3	Management review	
	10.4	System audit	
11	Data	management	48
	11.1	Data acquisition	
	11.1	11.1.1 Data acquisition content	
		11.1.2 Data acquisition method	
		11.1.3 Data alignment	
	11.2	Data transfer	
	11.3	Data integration	
	11.0	11.3.1 General	
		11.3.2 Data integration requirements	
12	Dinoli	line integrity management within emergency response planning and failur	
12	mana	agement	50
	12.1	Emergency response planning	
		12.1.1 General	
		12.1.2 Emergency plan preparation	
		12.1.3 Preparation for emergency data	
		12.1.4 Emergency response	
	12.2	Failure management	51
		12.2.1 General	
		12.2.2 Failure analysis	
		12.2.3 Incident investigation report	
		12.2.4 Remedial and preventative measures	52
		12.2.5 Failure recovery prior to restart	
		12.2.6 Trend analysis of pipeline incidents and causes	.4522152
13		line remaining life assessment and abandonment processes	
13	13.1	General	53 53
	13.2	Pipeline remaining life assessment process	
	13.2	13.2.1 General	
		13.2.2 Data collection	
		13.2.3 Pipeline segmentation	
		13.2.4 Integrity assessment	
		13.2.5 Physical life determination	
		13.2.6 Economic viability assessment	
		13.2.7 Risk assessment	
		13.2.8 Remaining life assessment	
	13.3	Deactivation and abandonment process	
	10.0	13.3.1 Guideline for the abandonment of a transportation pipeline	
		13.3.2 Preparation before pipeline abandonment	
		13.3.3 Pipeline cleaning	
		13.3.4 Deactivation of pipeline	
		13.3.5 Records	
	13.4	Life extension and recycle of pipeline	
	13.1	13.4.1 Life extension	
		13.4.2 Reactivation of pipeline	
	13.5	Uprating	
	10.0	13.5.1 General requirements	
		13.5.2 Limitation on increase in maximum allowable operating pressure	
		13.5.3 Uprating method	
		Totolo Opidang medica	U1

ISO 19345-2:2019(E)

	13.6	Reporting	62			
14		rds and documents management				
15	Com	Communication 15.1 General				
		General	63			
	15.2					
16	Mana	gement of change	64			
17	Train	Training and skills 17.1 General				
	17.1	General	64			
	17.2	Levels of skill	64			
Anne	x A (inf	ormative) Example approach of semi-quantitative risk assessment	66			
Anne	x B (inf	ormative) Risk matrix	68			
Anne	x C (inf	ormative) Example of the threat identification in lifecycle phases	70			
		Formative) Establishing performance measures				
Anne	x E (inf	ormative) Integrity data acquisition list	75			
Anne	x F (inf	ormative) Structure of pipeline data tables	77			
Anne	x G (inf	ormative) Outline requirements for pipeline management training and skills	83			
Dibli	ogranh	X7	90			

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 19345-2:2019

https://standards.iteh.ai/catalog/standards/iso/1a528734-0bd7-4c81-956e-19149609d331/iso-19345-2-2019

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 67, *Materials, equipment and offshore structures for petroleum, petrochemical and natural gas industries*, Subcommittee SC 2, *Pipeline transportation systems*.

A list of all parts in the ISO 19345 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document addresses the integrity of petroleum and natural gas pipelines through their entire life-cycle, from design to eventual abandonment. For this reason, considerations relating to design, construction and abandonment have been included. This approach supports the development and implementation of a holistic and integrated pipeline integrity management program that bridges between life-cycle elements and thereby avoids compartmentalizing of the pipeline life-cycle into essentially independent data and functional silos, which has traditionally been the case. The integrated approach was developed on the basis of extensive research and examination of best practices and results from pipeline integrity audits world-wide.

This document is intended to be used by companies that have not yet developed an official program or are developing a program for new pipelines. This document can also be used to guide continual improvement of existing programs by both operating companies and regulators to evaluate integrity management program effectiveness.

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 19345-2:2019

https://standards.iteh.ai/catalog/standards/iso/1a528734-0bd7-4c81-956e-19149609d331/iso-19345-2-2019

Petroleum and natural gas industry — Pipeline transportation systems — Pipeline integrity management specification —

Part 2:

Full-life cycle integrity management for offshore pipeline

1 Scope

This document specifies requirements and gives recommendations on the management of integrity of a pipeline system throughout its life cycle, which includes design, construction, commissioning, operation, maintenance and abandonment.


This document is applicable to offshore pipelines for transporting petroleum and natural gas. It is applicable to rigid steel pipelines. It is not applicable to flexible pipelines, dynamic risers or those constructed from other materials, such as glass-reinforced plastics.


NOTE 1 An offshore pipeline system extends to:

- the first valve, flange or connection above water on platform or subsea mechanical connector with subsea structure (i.e. manifold or dynamic riser);
- the connection point to the offshore installation (i.e. piping manifolds are not included);
- the first valve, flange, connection or isolation joint at a landfall, unless otherwise specified by the onshore legislation.

NOTE 2 The components mentioned above (valve, flange, connection, isolation joint) include also any pup pieces, i.e. the offshore pipeline system extends to the weld beyond the pup piece, see <u>Figure 1</u>.

This document is used for integrity management, which is initiated at the design and construction stage of the pipeline. Where requirements of a design and construction standard (e.g. ISO 13623) are different, the provisions of this document will enhance the design and construction from an integrity perspective.

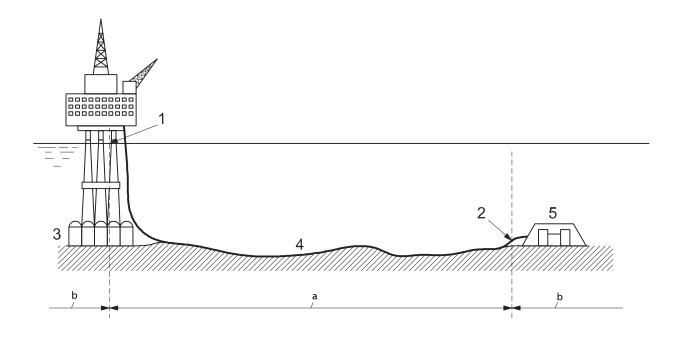

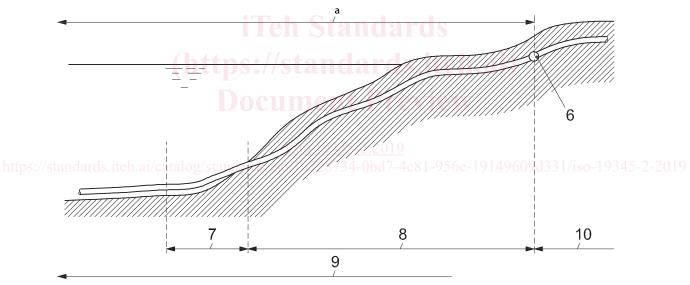

Key

- 1 first valve, flange, connection or isolation joint
- 2 connector point to subsea piping
- 3 topside
- 4 pipeline system
- 5 pipeline subsea structure
- 6 first valve, flange, connection or isolation joint
- 7 nearshore section
- 8 shore approach
- 9 offshore section
- 10 onshore section
- a covered by this document
- b not covered by this document

Figure 1 — Extent of pipeline systems covered by this document

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13623, Petroleum and natural gas industries — Pipeline transporting system

ISO 15589-2, Petroleum, petrochemical and natural gas industries — Cathodic protection of pipeline transportation systems — Part 2: Offshore pipelines

ISO 31000, Risk management — Guidelines

IEC 31010, Risk assessment techniques

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at https://www.iso.org/obp
- IEC Electropedia: available at http://www.electropedia.org/

3.1.1

abandonment

activities associated with taking a pipeline permanently out of operation

Note 1 to entry: An abandoned pipeline cannot be returned to operation.

Note 2 to entry: Depending on the legislation abandonment can require cover or removal.

3.1.2

anomaly

possible deviation from pipe material or weld soundness

Note 1 to entry: The identification of an indication of an anomaly can be generated by non-destructive inspection, such as in-line inspection.

3.1.3

baseline assessment

first integrity assessment prior to or after operation

3.1.4

cathodic protection

corrosion control technique to prevent or reduce the external corrosion of metal pipelines by transferring an electrical current onto the pipe to achieve increased negative electrical potentials

3.1.5

corrosion

deterioration of a material, usually a metal that results from an electrochemical reaction with its environment

3.1.6

crack

planar flaw, or linear discontinuity, with a sharp tip radius

3.1.7

critical consequence area

location where a pipeline release might have a significant adverse effect on public safety, property and the environment

Note 1 to entry: The pipeline segments in CCAs are of particular interest in risk assessment and integrity assessment evaluations and prioritizations.

3.1.8

deactivation

removal of a pipeline from service, though the pipeline might be returned to service after a proper assessment

Note 1 to entry: Also defined as decommissioning or suspension.

3.1.9

deformation

change in shape of the pipe or component, such as a bend, buckle, *dent* (3.1.11), ovality, ripple, wrinkle, or any other change that affects the roundness of the pipe or original cross-section or straightness of the pipe or component

3.1.10

defect

imperfection of a type or magnitude exceeding acceptable criteria

3.1.11

dent

depression which produces a disturbance in the curvature of the pipe wall, caused by contact with a foreign body resulting in plastic deformation of the pipe wall

3.1.12

design life

period for which the design basis is planned to remain valid

[SOURCE: ISO 13623:2017, 3.1.2]

d to remain valid

iso/1a528734_0hd7_4c81_956e_19149609d331/iso_19345_2_2019

3.1.13

failure

event in which a component or system does not perform according to its operational requirements

3.1.14

fitness for purpose

quantitative engineering evaluation that is performed to demonstrate the structural integrity of an inservice component that can contain an imperfection, *defect* (3.1.10) or damage

3.1.15

gouge

surface damage to a pipeline caused by contact with a foreign object that has scraped (gouged) material out of the pipe, resulting in a metal loss defect or imperfection

3.1.16

incident

unintentional release of gas or liquid due to the failure (3.1.13) of a pipeline

Note 1 to entry: Some regulatory authorities define "incident" as an event occurring on a pipeline for which the operator is required to make a report to the concerned regulatory authority.

3.1.17

in-line inspection

inspection of a pipe wall from the interior of the pipe using specialized tools

3.1.18

integrity assessment

process that includes the inspection and testing of a pipeline in order to determine physical characteristics and assess its integrity condition by combination of an analysis of data, use of reliability assessment methodologies of the structure and an evaluation of the safety state of the pipeline

3.1.19

integrity management program

documented program that specifies the practices used by the operating company to proactively manage the safe, environmentally responsible, and reliable service of a pipeline system throughout its lifecycle and which incorporates a continuous improvement process

3.1.20

life extension

additional period of time beyond the original design or *service life* (3.1.36) (but within the assessed remnant life) for which permission to continue operating a pipeline system is granted by the regulatory bodies

Note 1 to entry: Life extension is considered as a modification to the design basis.

[SOURCE: ISO/TS 12747:2011, 3.7]

3.1.21

magnetic flux leakage

type of in-line inspection technology in which a magnetic field is induced in the pipe wall between two poles of a magnet

Note 1 to entry: Anomalies affect the distribution of the magnetic flux in the wall. The magnetic flux leakage pattern is used to detect and characterize anomalies.

3.1.22

management of change

process that systematically recognizes and communicates to the necessary parties changes of a technical, physical, procedural or organizational nature that can impact system integrity

3.1.23 rds.iteh.ai/catalog/standards/iso/1a528/34-0bd/-4c81-956e-19149609d331/iso-19345-2-2019

manufacturing defect

defect (3.1.10) in the pipe body or coating created during the pipe or component manufacturing or coating processes

3.1.24

maximum allowable operating pressure

maximum internal pressure at which a pipeline system, or parts thereof, is allowed to be operated

Note 1 to entry: The MAOP is established by the maximum pressure achieved during testing (see ISO 13623).

3.1.25

metal loss

pipe anomaly in which metal has been removed

Note 1 to entry: Metal loss is usually the result of corrosion, but gouging, manufacturing defects erosion, or mechanical damage can also result in metal loss.

3.1.26

non-destructive testing

wide group of analysis techniques used to evaluate the properties of a material, component or system without causing damage

Note 1 to entry: "Non-destructive inspection" (NDI) and "non-destructive evaluation" (NDE) are also commonly used to describe this technology.

3.1.27

offshore pipeline

part of a pipeline system that, except for pipeline risers, is laid on the seabed or below it inside a trench

Note 1 to entry: The pipeline might be resting wholly or intermittently on, or buried below, the seabed.

3.1.28

operator

person or organization who owns or operates a pipeline system or facilities who is ultimately responsible for the operation and integrity of the pipeline system

3.1.29

pipeline integrity management

set of processes and procedures that proactively assures incident-free safe and environmentally responsible transportation of fluids through a pipeline system

3.1.30

pipeline integrity management program

continuous improvement closed-loop system using information technology to realize functions such as data acquisition and integration, integrity and *risk assessment* (3.1.33), mitigation and repair activity and maintenance decisions, with comprehensive management of change and continual review and improvement processes

3.1.31

pressure test

means of assessing the integrity of a new or existing pipeline that involves filling the pipeline with water and pressurizing to a level in excess of the MAOP of the pipeline to demonstrate that the pipeline is fit for service at the MAOP for a given time frame dependent on the identified integrity hazards

Note 1 to entry: See ISO 13623:2017, 6.7.

3.1.32

risk

3.1.33

risk assessment

systematic, analytical process in which potential hazards from the pipeline system are proactively identified, and the likelihood and consequences of potential adverse events are determined

3.1.34

risk management

coordinated activities to direct and control an organization with regard to risk (3.1.32)

[SOURCE: ISO Guide 73:2009, 2.1]

3.1.35

safe operating pressure

pressure, calculated using the appropriate analysis and mathematical formulas for the specific type of defect (3.1.10) identified

EXAMPLE For corrosion defects using recognized remaining strength of corroded pipeline formulas, where all corroded regions will withstand a calculated safe operating pressure.