

# ETSI TS 126 118 V17.0.0 (2022-05)



**iTeh STANDARD**  
**5G;**  
**Virtual Reality (VR) profiles for streaming applications**  
**(3GPP TS 26.118 version 17.0.0 Release 17)**  
**(standards.itih.ai)**

[ETSI TS 126 118 V17.0.0 \(2022-05\)](https://standards.itih.ai/catalog/standards/sist/00322d38-5989-4a2a-800a-88f877deaefe/etsi-ts-126-118-v17-0-0-2022-05)  
<https://standards.itih.ai/catalog/standards/sist/00322d38-5989-4a2a-800a-88f877deaefe/etsi-ts-126-118-v17-0-0-2022-05>



---

**Reference**

RTS/TSGS-0426118vh00

---

**Keywords**

5G

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

## Legal Notice

(standards.iteh.ai)

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	7
Introduction .....	8
1 Scope .....	9
2 References .....	9
3 Definitions, symbols and abbreviations .....	10
3.1 Definitions .....	10
3.2 Symbols.....	10
3.3 Abbreviations .....	10
4 Architectures and Interfaces for Virtual Reality .....	11
4.1 Definitions and Reference Systems.....	11
4.1.1 Overview .....	11
4.1.2 3GPP 3DOF Coordinate System.....	12
4.1.3 Video Signal Representation.....	14
4.1.4 Audio Signal Representation .....	15
4.2 End-to-end Architecture .....	16
4.3 Client Reference Architecture .....	17
4.4 Rendering Schemes, Operation Points and Media Profiles .....	19
4.5 Audio Rendering .....	21
4.5.1 Audio Renderer Definitions .....	21
4.5.1.1 Reference Renderer .....	21
4.5.1.2 Common Informative Binaural Renderer (CIBR).....	21
4.5.1.3 External Renderer .....	22
4.5.1.4 Common Renderer API .....	22
4.5.1.5 External Renderer API .....	22
4.5.1.6 Rendering Test .....	23
5 Video .....	23
5.1 Video Operation Points .....	23
5.1.1 Definition of Operation Point .....	23
5.1.2 Parameters of Visual Operation Point.....	24
5.1.3 Operation Point Summary .....	24
5.1.4 Basic H.264/AVC .....	25
5.1.4.1 General .....	25
5.1.4.2 Profile and level .....	25
5.1.4.3 Aspect Ratios and Spatial resolutions .....	25
5.1.4.4 Colour information.....	26
5.1.4.5 Frame rates .....	26
5.1.4.6 Random access point.....	26
5.1.4.7 Sequence parameter set .....	26
5.1.4.8 Video usability information .....	27
5.1.4.9 Omni-directional Projection Format .....	27
5.1.4.10 Restricted Coverage .....	27
5.1.4.11 Other VR Metadata .....	27
5.1.4.12 Receiver Compatibility .....	27
5.1.5 Main H.265/HEVC .....	28
5.1.5.1 General .....	28
5.1.5.2 Profile and level .....	28
5.1.5.3 Bit depth.....	28
5.1.5.4 Spatial Resolutions.....	28
5.1.5.5 Colour information and Transfer Characteristics .....	29

5.1.5.6	Frame rates .....	29
5.1.5.7	Random access point .....	30
5.1.5.8	Video and Sequence Parameter Sets .....	30
5.1.5.9	Video usability information .....	30
5.1.5.10	Omni-directional Projection Formats .....	30
5.1.5.11	Restricted Coverage .....	30
5.1.5.12	Viewport-Optimized Content .....	31
5.1.5.13	Frame packing arrangement .....	31
5.1.5.14	Other VR Metadata .....	31
5.1.5.15	Receiver Compatibility .....	31
5.1.6	Flexible H.265/HEVC .....	32
5.1.6.1	General .....	32
5.1.6.2	Profile and level .....	32
5.1.6.3	Bit depth .....	32
5.1.6.4	Spatial Resolutions .....	33
5.1.6.5	Colour information and Transfer Characteristics .....	33
5.1.6.6	Frame rates .....	34
5.1.6.7	Random access point .....	34
5.1.6.8	Video and Sequence Parameter Sets .....	35
5.1.6.9	Video usability information .....	35
5.1.6.10	Omni-directional Projection Formats .....	35
5.1.6.11	Restricted Coverage .....	35
5.1.6.12	Viewport-Optimized Content .....	36
5.1.6.13	Frame packing arrangement .....	36
5.1.6.14	Other VR Metadata .....	36
5.1.6.15	Receiver Compatibility .....	36
5.1.7	Main 8K H.265/HEVC .....	37
5.1.7.1	General .....	37
5.1.7.2	Profile and level .....	37
5.1.7.3	Bit depth .....	37
5.1.7.4	Spatial Resolutions .....	38
5.1.7.5	Colour information and Transfer Characteristics .....	38
5.1.7.6	Frame rates .....	39
5.1.7.7	Random access point .....	39
5.1.7.8	Video and Sequence Parameter Sets .....	39
5.1.7.9	Video usability information .....	39
5.1.7.10	Omni-directional Projection Formats .....	39
5.1.7.11	Restricted Coverage .....	40
5.1.7.12	Frame packing arrangement .....	40
5.1.7.13	Other VR Metadata .....	40
5.1.7.14	Receiver Compatibility .....	40
5.2	Video Media Profiles .....	40
5.2.1	Introduction and Overview .....	40
5.2.2	Basic Video Media Profile .....	41
5.2.2.1	Overview .....	41
5.2.2.2	File Format Signaling and Encapsulation .....	41
5.2.2.3	DASH Integration .....	42
5.2.2.3.1	Definition .....	42
5.2.2.3.2	Additional Restrictions for DASH Representations .....	42
5.2.2.3.3	DASH Adaptation Set Constraints .....	43
5.2.3	Main Video Media Profile .....	44
5.2.3.1	Overview .....	44
5.2.3.2	File Format Signaling and Encapsulation .....	44
5.2.3.3	DASH Integration .....	46
5.2.3.3.1	Definition .....	46
5.2.3.3.2	Additional Restrictions for DASH Representations .....	46
5.2.3.3.3	DASH Adaptation Set Constraints .....	46
5.2.3.3.4	Adaptation Set Ensembles for Viewport-Optimized offering .....	48
5.2.4	Advanced Video Media Profile .....	49
5.2.4.1	Overview .....	49
5.2.4.2	File Format Signaling and Encapsulation .....	49
5.2.4.3	DASH Integration .....	51

iTech STANDARD  
PREVIEW  
(standards.itech.ai)

<https://standards.itech.ai/catalog/standards/sist/00322d38-5990-4c27-890a-88f877deaefe/etsi-ts-126-118-v17-0-0-2022-05>

5.2.4.3.1	Definition.....	51
5.2.4.3.2	Additional Restrictions for DASH Representations .....	51
5.2.4.3.3	DASH Adaptation Set Constraints .....	52
5.2.4.3.4	Adaptation Set Constraints for Viewport Selection.....	54
6	Audio.....	54
6.1	Audio Operation Points .....	54
6.1.1	Definition of Operation Point .....	54
6.1.2	Parameters of Audio Operation Point .....	55
6.1.3	Summary of Audio Operation Points.....	55
6.1.4	3GPP MPEG-H Audio Operation Point.....	55
6.1.4.1	Overview .....	55
6.1.4.2	Bitstream requirements .....	56
6.1.4.3	Receiver requirements.....	56
6.1.4.3.1	General .....	56
6.1.4.3.2	Decoding process.....	56
6.1.4.3.3	Random Access .....	57
6.1.4.3.4	Configuration change .....	57
6.1.4.3.5	MPEG-H Multi-stream Audio .....	57
6.1.4.3.6	Rendering requirements.....	57
6.2	Audio Media Profiles .....	59
6.2.1	Introduction and Overview .....	59
6.2.2	OMAF 3D Audio Baseline Media Profile .....	60
6.2.2.1	Overview .....	60
6.2.2.2	File Format Signaling and Encapsulation .....	60
6.2.2.2.1	General .....	60
6.2.2.2.2	Configuration change constraints .....	60
6.2.2.3	Multi-stream constraints.....	60
6.2.2.3a	Additional Restrictions for DASH Representations.....	60
6.2.2.4	DASH Adaptation Set Constraints.....	61
6.2.2.4.1	General .....	61
6.2.2.4.2	DASH Adaptive Bitrate Switching.....	61
7	Metadata.....	61
7.1	Presentation without Pose Information to 2D Screens .....	61
8	VR Presentation.....	62
8.1	Definition .....	62
8.2	3GPP VR File.....	62
8.3	3GPP VR DASH Media Presentation .....	62
9	VR Metrics .....	62
9.1	General .....	62
9.2	VR Client Reference Architecture.....	62
9.2.1	Architecture .....	62
9.2.2	Observation Point 1 .....	63
9.2.3	Observation Point 2 .....	63
9.2.4	Observation Point 3 .....	64
9.2.5	Observation Point 4 .....	64
9.2.6	Observation Point 5 .....	64
9.3	Metrics Definitions.....	65
9.3.1	General.....	65
9.3.2	Comparable quality viewport switching latency.....	65
9.3.3	Rendered viewports .....	67
9.3.4	VR Device information.....	68
9.4	Metrics Configuration and Reporting.....	69
9.4.1	Configuration.....	69
9.4.2	Reporting .....	69
9.4.3	Reporting Format.....	69
<b>Annex A (informative):</b>	<b>Content Generation Guidelines .....</b>	<b>72</b>
A.1	Introduction .....	72

A.2	Video .....	72
A.2.1	Overview .....	72
A.2.2	Decoded Texture Signal Constraints .....	72
A.2.2.1	General.....	72
A.2.2.2	Constraints for Main and Flexible H.265/HEVC Operation Point .....	72
A.2.2.2a	Constraints for Main 8K H.265/HEVC Operation Point .....	73
A.2.3	Conversion of ERP Signals to CMP.....	74
A.2.3.1	General.....	74
A.2.3.2	Equirectangular Projection (ERP).....	75
A.2.3.3	Cubemap Projection (CMP).....	75
A.2.3.4	Conversion between two projection formats .....	76
<b>Annex B (informative): Example External Binaural Renderer .....</b>		<b>78</b>
B.1	General .....	78
B.2	Interfaces .....	78
B.2.1	Interface for Audio Data and Metadata.....	78
B.2.2	Head Tracking Interface .....	79
B.2.3	Interface for Head-Related Impulse Responses.....	79
B.3	Preprocessing .....	79
B.3.1	Channel Content .....	79
B.3.2	Object Content.....	79
B.3.3	HOA Content.....	79
B.3.4	Non-diegetic Content .....	79
B.4	Scene Displacement Processing .....	80
B.4.1	General .....	80
B.4.2	Applying Scene Displacement Information .....	80
B.5	Headphone Output Signal Computation.....	80
B.5.1	General .....	80
B.5.2	HRIR Selection .....	80
B.5.3	Initialization .....	80
B.5.4	Convolution and Crossfade .....	81
B.5.5	Binaural Downmix .....	81
B.5.6	Complexity .....	82
B.5.7	Motion Latency .....	82
<b>Annex C (informative): Registration Information .....</b>		<b>83</b>
C.1	3GPP Registered URIs .....	83
<b>Annex D (informative): VR metrics calculation examples.....</b>		<b>84</b>
D.1	Comparable quality viewport switching latency .....	84
D.2	Rendered viewports .....	86
<b>Annex E (informative): Change history .....</b>		<b>89</b>
History .....		90

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

---

## Introduction

The present document provides technologies for interoperable Virtual Reality services with focus on streaming and consumption.

Virtual Reality (VR) is the ability to be virtually present in a space created by the rendering of natural and/or synthetic image and sound correlated by the movements of the immersed user allowing interacting with that world.

Suitable media formats for providing immersive experiences are specified to enable Virtual Reality Services in the context of 3GPP bearer and user services.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

ETSI TS 126 118 V17.0.0 (2022-05)

<https://standards.iteh.ai/catalog/standards/sist/00322d38-5989-4a2a-800a-88f877deaefe/etsi-ts-126-118-v17-0-0-2022-05>

---

# 1 Scope

The present document defines interoperable formats for Virtual Reality for streaming services. Specifically, the present document defines operation points, media profiles and presentation profiles for Virtual Reality. The present document builds on the findings and conclusions in TR 26.918 [2].

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TR 26.918: "Virtual Reality (VR) media services over 3GPP".
- [3] Recommendation ITU-R BT.709-6 (06/2015): "Parameter values for the HDTV standards for production and international programme exchange".
- [4] Recommendation ITU-R BT.2020-2 (10/2015): "Parameter values for ultra-high definition television systems for production and international programme exchange".
- [5] Recommendation ITU-T H.264 (04/2017): "Advanced video coding for generic audiovisual services" | ISO/IEC 14496-10:2014: "Information technology – Coding of audio-visual objects – Part 10: Advanced Video Coding".  
<https://standards.iteh.ai/catalog/standards/sist/00322d38-5089-4a32-8570-2022-05>
- [6] Recommendation ITU-T H.265 (02/2018): "High efficiency video coding" | ISO/IEC 23008-2:2018: "High Efficiency Coding and Media Delivery in Heterogeneous Environments – Part 2: High Efficiency Video Coding".
- [7] void.
- [8] 3GPP TS 26.247: "Transparent end-to-end Packet-switched Streaming Service (PSS); Progressive Download and Dynamic Adaptive Streaming over HTTP (3GP-DASH)".
- [9] ISO/IEC 14496-15: "Information technology - Coding of audio-visual objects - Part 15: Carriage of network abstraction layer (NAL) unit structured video in ISO base media file format".
- [10] ISO/IEC 23001-8: "Information technology -- MPEG systems technologies -- Part 8: Coding-independent code points".
- [11] Recommendation ITU-R BT.2100-1: "Image parameter values for high dynamic range television for use in production and international programme exchange".
- [12] 3GPP TS 26.116: "Television (TV) over 3GPP services; Video profiles".
- [13] ISO/IEC 23090-2: "Coded representation of immersive media -- Part 2: Omnidirectional media format".
- [14] ISO/IEC DIS 23091-2: "Information technology -- Coding-independent code points -- Part 2: Video".
- [15] 3GPP TS 26.260: "Objective test methodologies for the evaluation of immersive audio systems".
- [16] 3GPP TS 26.259: "Subjective test methodologies for the evaluation of immersive audio systems".

- [17] ISO/IEC 14496-12: "Information technology -- Coding of audio-visual objects -- Part 12: ISO base media file format".
- [18] ISO/IEC 23009-1: "Information technology -- Dynamic adaptive streaming over HTTP (DASH) -- Part 1: Media presentation description and segment formats".
- [19] ISO/IEC 23008-3:2015: "Information technology -- High efficiency coding and media delivery in heterogeneous environments - Part 3: 3D audio", ISO/IEC 23008-3:2015/Amd2:2016: "MPEG-H 3D Audio File Format Support ", ISO/IEC 23008-3:2015/Amd 3:2017: "MPEG-H 3D Audio Phase 2", ISO/IEC 23008-3:2015/Amd 5: "Audio metadata enhancements".
- [20] IETF RFC 6381: "The 'Codecs' and 'Profiles' Parameters for "Bucket" Media Types", R. Gellens, D. Singer, P. Frojdh, August 2011.
- [21] AES69-2015: "AES standard for file exchange - Spatial acoustic data file format", 2015.

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

**bitstream:** a bitstream that conforms to a video encoding format and certain Operation Point.

**field of view:** the extent of visible area expressed with vertical and horizontal angles, in degrees in the 3GPP 3DOF reference system.

**operation point:** a collection of discrete combinations of different content formats including spatial and temporal resolutions, colour mapping, transfer functions, rendering metadata and the encoding format.

**pose:** position derived by the head tracking sensor expressed by (azimuth; elevation; tilt angle).

**receiver:** a receiver that can decode and render any bitstream that is conforming to a certain Operation Point.

**viewport:** the part of the 3DOF content to render based on the pose and the field of view.

### 3.2 Symbols

For the purposes of the present document, the following symbols apply:

$\alpha$	yaw of the 3GPP 3DOF coordinate system
$\beta$	pitch of the 3GPP 3DOF coordinate system
$\gamma$	roll of the 3GPP 3DOF coordinate system
$\phi$	azimuth of the 3GPP 3DOF coordinate system
$\theta$	elevation of the 3GPP 3DOF coordinate system

### 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

3DOF	3 Degrees of freedom
ACN	Ambisonics Channel Number
API	Application Programming Interface
AVC	Advanced Video Coding
BMFF	Base Media File Format
BRIR	Binaural Room Impulse Response
CMP	Cube-Map Projection

CIBR	Common Informative Binaural Renderer
DASH	Dynamic Adaptive Streaming over HTTP
DRC	Dynamic Range Control
EOTF	Electro-Optical Transfer Function
ERP	EquiRectangular Projection
ESD	Equivalent Spatial Domain
FFT	Fast Fourier Transform
FIR	Finite Impulse Response
FOA	First Order Ambisonics
FOV	Field Of View
GPU	Graphics Processing Unit
HDR	High Dynamic Range
HDTV	High Definition TeleVision
HEVC	High Efficiency Video Coding
HMD	Head Mounted Display
HOA	High Order Ambisonics
HRD	Hypothetical Reference Decoder
HRIR	Head-Related Impulse Responses
HRTF	Head-Related Transfer Function
HTTP	HyperText Transfer Protocol
IFFT	Inverse FFT
IRFFT	Inverse RFFT
MAE	MPEG-H Audio Metadata information
MCC	Metrics Collection and Computation
MHAS	MPEG-H Audio Stream
MIME	Multipurpose Internet Mail Extensions
MPD	Media Presentation Description
MPEG	Moving Pictures Experts Group
NAL	Network Abstraction Layer
OMAF	Omnidirectional Media Format
PCM	Pulse Code Modulation
RAP	Random Access Point
RFFT	Real FFT
RWP	Region-Wise Packing
SDR	Standard Dynamic Range
SEI	Supplemental Enhancement Information
SN3D	Schmidt semi-normalisation
SOFA	Spatially Oriented Format for Acoustics
SPS	Sequence Parameter Set
SRQR	Spherical Region-wise Quality Ranking
VCL	Video Coding Layer
VST	Virtual Studio Technology
VUI	Video Usability Information
VR	Virtual Reality

---


## 4 Architectures and Interfaces for Virtual Reality

### 4.1 Definitions and Reference Systems

#### 4.1.1 Overview

Virtual reality is a rendered version of a delivered visual and audio scene. The rendering is designed to mimic the visual and audio sensory stimuli of the real world as naturally as possible to an observer or user as they move within the limits defined by the application.

Virtual reality usually, but not necessarily, assumes a user to wear a head mounted display (HMD), to completely replace the user's field of view with a simulated visual component, and to wear headphones, to provide the user with the accompanying audio as shown in Figure 4.1-1.

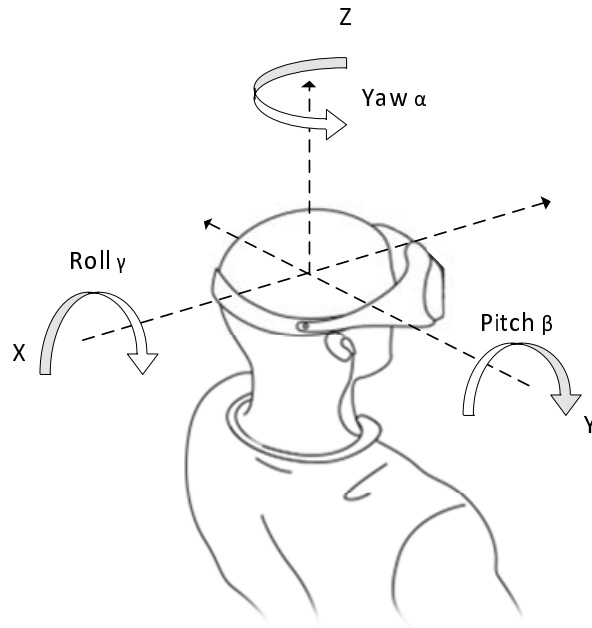

**Figure 4.1-1: Reference System**

Some form of head and motion tracking of the user in VR is usually also necessary to allow the simulated visual and audio components to be updated in order to ensure that, from the user's perspective, items and sound sources remain consistent with the user's movements. Sensors typically are able to track the user's pose in the reference system. Additional means to interact with the virtual reality simulation may be provided but are not strictly necessary.

VR users are expected to be able to look around from a single observation point in 3D space defined by either a producer or the position of one or multiple capturing devices. When VR media including video and audio is consumed with a head-mounted display or a smartphone, only the area of the spherical video that corresponds to the user's viewport is rendered, as if the user were in the spot where the video and audio were captured.


This ability to look around and listen from a *centre point* in 3D space is defined as 3 degrees of freedom (3DOF). According to the figure 4.1-1:

- tilting side to side on the X-axis is referred to as *Rolling*, also expressed as  $\gamma$
- tilting forward and backward on the Y-axis is referred to as *Pitching*, also expressed as  $\beta$
- turning left and right on the Z-axis is referred to as *Yawing*, also expressed as  $\alpha$

It is worth noting that this *centre point* is not necessarily static - it may be moving. Users or producers may also select from a few different observational points, but each observation point in 3D space only permits the user 3 degrees of freedom. For a full 3DOF VR experience, such video content may be combined with simultaneously captured audio, binaurally rendered with an appropriate Binaural Room Impulse Response (BRIR). The third relevant aspect is the interactivity: Only if the content is presented to the user in such a way that the movements are instantaneously reflected in the rendering, then the user will perceive a full immersive experience. For details on immersive rendering latencies, refer to TR 26.918 [2].

#### 4.1.2 3GPP 3DOF Coordinate System

The coordinate system is specified for defining the sphere coordinates azimuth ( $\phi$ ) and elevation ( $\theta$ ) for identifying a location of a point on the unit sphere, as well as the rotation angles yaw ( $\alpha$ ), pitch ( $\beta$ ), and roll ( $\gamma$ ). The origin of the coordinate system is usually the same as the centre point of a device or rig used for audio or video acquisition as well as the position of the user's head in the 3D space in which the audio or video are rendered. Figure 4.1-2 specifies principal axes for the coordinate system. The X axis is equal to back-to-front axis, Y axis is equal to side-to-side (or lateral) axis, and Z axis is equal to vertical (or up) axis. These axis map to the reference system in Figure 4.1-1.

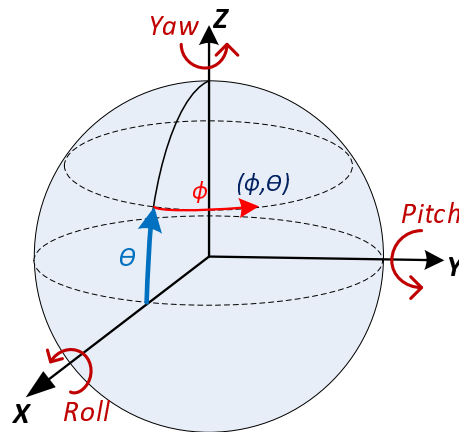


**Figure 4.1-2: Coordinate system**

Signals defined in the present document are represented in a spherical coordinate space in angular coordinates  $(\phi, \theta)$  for use in omnidirectional video and 3D audio. The viewing and listening perspective are from the origin sensing/looking/hearing outward toward the inside of the sphere. Even though a spherical coordinate is generally represented by using radius, elevation, and azimuth, it assumes that a unit sphere is used for capturing and rendering of VR media. Thus, a location of a point on the unit sphere is identified by using the sphere coordinates azimuth ( $\phi$ ) and elevation ( $\theta$ ). The spherical coordinates are defined so that  $\phi$  is the azimuth and  $\theta$  is the elevation. As depicted in Figure 4.1-2, the coordinate axes are also used for defining the rotation angles yaw ( $\alpha$ ), pitch ( $\beta$ ), and roll ( $\gamma$ ). The angles increase clockwise when looking from the origin towards the positive end of an axis. The value ranges of azimuth, yaw, and roll are all  $-180.0$ , inclusive, to  $180.0$ , exclusive, degrees. The value range of elevation and pitch are both  $-90.0$  to  $90.0$ , inclusive, degrees.

Depending on the applications or implementations, not all angles may be necessary or available in the signal. The 360 video may have a restricted *coverage* as shown in Figure 4.1-3. When the video signal does not cover the full sphere, the coverage information is described by using following parameters:

- *centre azimuth*: specifies the azimuth value of the centre point of sphere region covered by the signal.
- *centre elevation*: specifies the elevation value of the centre of sphere region.
- *azimuth range*: specifies the azimuth range through the centre point of the sphere region.
- *elevation range*: specifies the elevation range through the centre point of the sphere region.
- *tilt angle*: indicates the amount of tilt of a sphere region, measured as the amount of rotation of the sphere region along the axis originating from the origin passing through the centre point of the sphere region, where the angle value increases clockwise when looking from the origin towards the positive end of the axis.

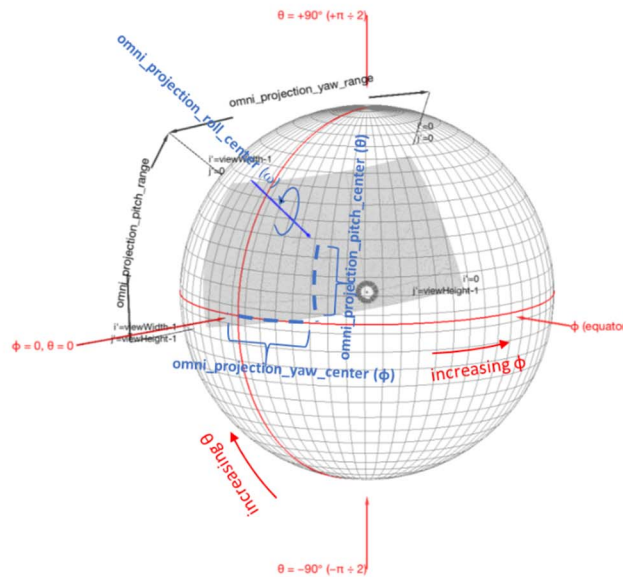

**Figure 4.1-3: Restricted coverage of the sphere region covered by the cropped output picture with omni\_projection\_{yaw | pitch | roll}\_center the center of the coverage region**


For video, such a centre point may exist for each eye, referred to as *stereo* signal, and the video consists of three colour components, typically expressed by the luminance (Y) and two chrominance components (U and V).

The coordinate systems for all media types are assumed to be aligned in 3GPP 3DOF coordinate system. Within this coordinate system, the *pose* is expressed by a triple of azimuth, elevation, and tilt angle characterizing the head position of a user consuming the audio-visual content. The pose is generally dynamic, and the information may be provided through sensors in a frequently sampled version.

The *field of view (FoV)* of a rendering device is static and defined in two dimensions, the horizontal and vertical FoV, each in units of degrees in the angular coordinates ( $\phi, \theta$ ). The pose together with the field of view of the device enables the system to generate the user viewport, i.e., the presented part of the content at a specific point in time.

### 4.1.3 Video Signal Representation

Commonly used video encoders cannot directly encode spherical videos, but only 2D textures. However, there is a significant benefit to reuse conventional 2D video encoders. Based on this, Figure 4.1-4 provides the basic video signal representation in the context of omnidirectional video in the context of the present document. By pre-processing, the spherical video is mapped to a 2D texture. The 2D texture is encoded with a regular 2D video encoder and the VR rendering metadata (i.e. the data describing the mapping from the spherical coordinate to the 2D texture) is encoded and provided along with the video bitstream, such that at the receiving end the inverse process can be applied to reconstruct the spherical video.

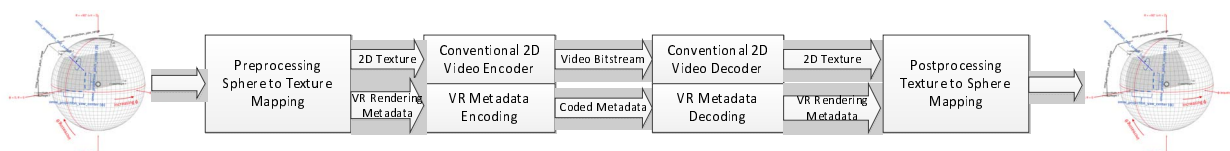

**Figure 4.1-4: Video Signal Representation**

Mapping of a spherical picture to a 2D texture signal is illustrated in Figure 4.1-5. The most commonly used mapping from spherical to 2D is the equirectangular projection (ERP) mapping. The mapping is bijective, i.e. it may be expressed in both directions.