



Standard Specification for Crosslinked Polyethylene (PEX) Tubing¹

This standard is issued under the fixed designation F 876; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 This specification covers crosslinked polyethylene (PEX) tubing that is outside diameter controlled, made in nominal SDR9 tubing dimension ratios except where noted, and pressure rated for water at three temperatures (see [Appendix X1](#)). Included are requirements and test methods for material, workmanship, dimensions, burst pressure, hydrostatic sustained pressure, excessive temperature pressure, excessive temperature-pressure, environmental stress cracking, stabilizer functionality, bent-tube hydrostatic pressure, oxidative stability in potable chlorinated water, and degree of crosslinking. Requirements for tubing markings are also given.

1.2 The text of this specification references notes, footnotes, and appendixes which provide explanatory material. These notes and footnotes (excluding those in tables and figures) shall not be considered as requirements of the specification.

1.3 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.4 The following safety hazards caveat pertains only to the test methods portion, Section 7, of this specification: *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

- D 618 Practice for Conditioning Plastics for Testing
- D 792 Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement
- D 1505 Test Method for Density of Plastics by the Density-Gradient Technique

D 1598 Test Method for Time-to-Failure of Plastic Pipe Under Constant Internal Pressure

D 1599 Test Method for Resistance to Short-Time Hydraulic Pressure of Plastic Pipe, Tubing, and Fittings

D 1600 Terminology for Abbreviated Terms Relating to Plastics

D 1898 Practice for Sampling of Plastics³

D 2122 Test Method for Determining Dimensions of Thermoplastic Pipe and Fittings

D 2765 Test Methods for Determination of Gel Content and Swell Ratio of Crosslinked Ethylene Plastics

D 2837 Test Method for Obtaining Hydrostatic Design Basis for Thermoplastic Pipe Materials or Pressure Design Basis for Thermoplastic Pipe Products

D 3895 Test Method for Oxidative-Induction Time of Polyolefins by Differential Scanning Calorimetry

F 412 Terminology Relating to Plastic Piping Systems

F 2023 Test Method for Evaluating the Oxidative Resistance of Crosslinked Polyethylene (PEX) Tubing and Systems to Hot Chlorinated Water

2.2 ANSI Standard:

B36.10 Standards Dimensions of Steel Pipe (IPS)⁴

2.3 Federal Standard:

FED-STD-123 Marking for Shipment (Civil Agencies)⁵

2.4 Military Standard:

MIL-STD-129 Marking for Shipment and Storage⁵

2.5 NSF Standard:

NSF/ANSI 14 for Plastic Piping Components and Related Materials⁶

2.6 ISO Standards:⁴

ISO 1167 Thermoplastics pipes, fittings and assemblies for the conveyance of fluids -- Determination of the resistance to internal pressure -- Part 1: General method

ISO 13760 Plastics pipes for the conveyance of fluids under pressure -- Miner's rule -- Calculation method for cumulative damage

¹ This specification is under the jurisdiction of ASTM Committee F17 on Plastic Piping Systems and is the direct responsibility of Subcommittee F17.26 on Olefin Based Pipe.

Current edition approved Sept. 1, 2008. Published September 2008. Originally approved in 1984. Last previous edition approved 2008 as F 876 – 08.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Withdrawn. The last approved version of this historical standard is referenced on www.astm.org.

⁴ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org>.

⁵ Available from Standardization Documents Order Desk, DODSSP, Bldg. 4, Section D, 700 Robbins Ave., Philadelphia, PA 19111-5098, <http://www.dodssp.daps.mil>.

⁶ Available from NSF International, P.O. Box 130140, 789 N. Dixboro Rd., Ann Arbor, MI 48113-0140, <http://www.nsf.org>.

*A Summary of Changes section appears at the end of this standard.

ISO R 161-1690 Pipes of Plastic Materials for the Transport of Fluids (Outside Diameters and Nominal Pressures) Part 1, Metric Series

2.7 *PPI Standard*.⁷

PPI TR-4 PPI Listing of Hydrostatic Design Basis (HDB), Strength Design Basis (SDB), Pressure Design Basis (PDB) and Minimum Required Strength (MRS) Ratings for Thermoplastic Piping Materials or Pipe

3. Terminology

3.1 *Definitions*—Definitions are in accordance with Terminology **F 412**, and abbreviations are in accordance with Terminology **D 1600**, unless otherwise specified. The abbreviation for crosslinked polyethylene is PEX. Plastic tubing denotes a particular diameter schedule of plastic pipe in which outside diameter of the tubing is equal to the nominal size plus 1/8 in. Plastic pipe outside diameter schedule conforms to ANSI **B36.10**.

3.2 *Definitions of Terms Specific to This Standard*:

3.2.1 *crosslinked polyethylene plastics*—plastics prepared by crosslinking (curing) polyethylene compounds.

3.2.2 *hydrostatic design stress (HDS)*—the estimated maximum tensile stress the material is capable of withstanding continuously with a high degree of certainty that failure of the tube will not occur. This stress is circumferential when internal hydrostatic water pressure is applied. The HDS is equal to the hydrostatic design basis (HDB) times the design factor (DF) for water. For this standard, the design factor is equal to 0.50.

$$\begin{aligned} HDS &= HDB \times DF \\ &= HDB \times 0.50 \text{ (for this standard)} \end{aligned}$$

3.2.3 *hydrostatic design basis (HDB)*—one of a series of established stress values (specified in Test Method **D 2837**) for a plastic compound obtained by categorizing the long-term hydrostatic strength determined in accordance with Test Method **D 2837**.

3.2.3.1 *Discussion*—A listing of HDB and HDS values are contained in **PPI publication PPI TR-4**

3.2.4 *pressure rating (PR)*—the estimated maximum water pressure the tube is capable of withstanding continuously with a high degree of certainty that failure of the tube will not occur.

3.2.5 *relation between dimensions, hydrostatic design stress, and pressure rating*—the following expression, commonly known as the ISO equation,⁸ is used in this specification to relate dimensions, hydrostatic design stress, and pressure rating:

$$2S/P = (D_o/t) - 1 \quad (1)$$

or

$$2S/P = R - 1$$

where:

S = hydrostatic design stress, psi (or MPa),
 P = pressure rating, psi (or MPa),

D_o = average outside diameter, in. (or mm),
 t = minimum wall thickness, in. (or mm), and
 R = standard dimension ratio, SDR.

3.2.6 *standard dimension ratio (SDR)*—the ratio of outside diameter to wall thickness. For PEX-tubing, it is calculated by dividing the average outside diameter of the tubing in inches or in millimetres by the minimum wall thickness in inches or millimetres. If the wall thickness calculated by this formula is less than 0.070 in. (1.78 mm) it shall be arbitrarily increased to 0.070 in. except for sizes 5/16 in. and smaller, as specified in **Table 1**. The SDR values shall be rounded to the nearest 0.5.

3.2.7 *standard thermoplastic tubing materials designation code*—The tubing material designation code shall consist of the abbreviation for the type of plastic (PEX) followed by four Arabic digits that describe short-term properties in accordance with applicable ASTM standards and as shown in **Table 2**.

3.2.7.1 *Discussion*—The first digit is for chlorine resistance tested in accordance with Test Method **F 2023**.

(1) A digit “0” indicates that the PEX tubing either has not been tested for chlorine resistance or that the PEX tubing does not meet the minimum requirement for chlorine resistance.

(2) A digit “1” indicates the PEX tubing has been tested and meets the F 876 requirement for minimum chlorine resistance at the end use condition of 25% at 140°F (60°C) and 75% at 73°F (23°C).

(3) A digit “2” is reserved for future application.

(4) A digit “3” indicates that the PEX tubing has been tested and meets the F 876 requirement for minimum chlorine resistance at end use condition of 50% at 140°F and 50% at 73°F.

(5) A digit “4” is reserved for future application.

(6) A digit “5” indicates that the PEX tubing has been tested and meets the requirement for minimum chlorine resistance at end use conditions of 100% of the time at 140°F

3.2.7.2 *Discussion*—The second digit is a “0”. This digit is reserved for a currently unspecified PEX tubing property.

3.2.7.3 *Discussion*—The last two digits are the hydrostatic design stress for water at 73°F (23°C) in units of 100 psi with any decimal figures dropped. Where the hydrostatic design stress code contains less than two figures, a zero is used before the number. Thus, a complete material designation code for PEX tubing shall consist of the three letters “PEX” and four digits.

4. Tubing Classification

4.1 *General*—This specification covers one PEX tubing material in one standard dimension ratio and having pressure ratings for water of three temperatures. The pressure ratings decrease as the temperature is increased.

4.2 *Standard Thermoplastic Pipe Dimension Ratio (SDR)*—This specification covers PEX tubing in one standard dimension ratio (SDR 9) for nominal diameters 5/8 in. and larger, and with a specified wall thickness for smaller diameters. The pressure ratings are uniform for all nominal tubing sizes.

5. Materials

5.1 *General*—Crosslinked polyethylene tubing, meeting the requirements of this specification, are primarily defined by means of three criteria, namely, (1) nominal density, (2) degree

⁷ Plastics Pipe Institute (PPI), 105 Decker Court, Suite 825 Irving TX, 75062. <http://www.plasticpipe.org>

⁸ **ISO R161-1690**.

TABLE 1 Wall Thickness and Tolerances for Nominal PEX SDR 9 Plastic Tubing^A

Nominal Tubing		Minimum Wall Thickness		Tolerance	
in.	mm	in.	mm	in.	mm
1/8	3	0.047 ^B	1.19 ^B	+0.007	+0.18
1/4	7	0.062 ^B	1.57 ^B	+0.010	+0.25
5/16	8	0.064	1.63	+0.010	+0.25
3/8	10	0.070 ^B	1.78 ^B	+0.010	+0.25
1/2	13	0.070 ^B	1.78 ^B	+0.010	+0.25
5/8	16	0.083	2.12	+0.010	+0.25
3/4	19	0.097	2.47	+0.010	+0.25
1	25	0.125	3.18	+0.013	+0.33
1 1/4	32	0.153	3.88	+0.015	+0.38
1 1/2	38	0.181	4.59	+0.019	+0.48
2	51	0.236	6.00	+0.024	+0.61
2 1/2	64	0.292	7.41	+0.030	+0.76
3	76	0.347	8.82	+0.033	+0.84
3 1/2	89	0.403	10.23	+0.035	+0.89
4	102	0.458	11.64	+0.040	+1.02
4 1/2	114	0.514	13.05	+0.045	+1.14
5	127	0.569	14.46	+0.050	+1.27
6	152	0.681	17.29	+0.060	+1.52

^A The minimum is the lowest wall thickness of the pipe at any cross section. The maximum permitted wall thickness, at any cross section, is the minimum wall thickness plus the stated tolerance. All tolerances are on the plus side of the minimum requirement.

^B For tubing sizes of 1/2 in. and below, wall thickness minimums are not functions of SDR.

of crosslinking, and (3) long-term strength tests. There is a strong correlation between nominal density and results of short-term strength tests.

NOTE 1—PEX tubing intended for use in the transport of potable water should be evaluated and certified as safe for this purpose by a testing agency acceptable to the local health authority. The evaluation should be in accordance with requirements for chemical extraction, taste, and odor that are no less restrictive than those included in NSF/ANSI 14. The seal or mark of the laboratory making the evaluation should be included on the tubing.

5.2 *Basic Materials*—PEX tubing shall be made from polyethylene compounds which have been crosslinked by peroxides, Azo compounds, or silane compounds in extrusion, or by electron beam after extrusion, or by other means such that the tubing meets the performance requirements of Section 6. For the use temperatures that the tubing will be marked for, the materials, procedure for mixing, and the process for crosslinking shall result in a product with long term hydrostatic stress ratings equal to or better than those shown in Table 3, when determined in accordance with procedures no less restrictive than those of PPI TR-3.⁹ See Appendix X1 for additional information on PPI hydrostatic stress ratings.

NOTE 2—Tubing produced by crosslinking by peroxides, Azo compounds, or silane compounds in extrusion, or by electron beam after extrusion have met the requirements of Section 6. There are several other processes for producing crosslinked polyethylene tubing. However, each process must be established as meeting the requirements of this specification.

5.3 *Tubing Material Designation*—The tubing meeting the requirements of this specification shall be designated PEX.

⁹ PPI Technical Report TR-3, Policies and Procedures for Developing Recommended Hydrostatic Design Stresses for Thermoplastic Pipe Materials.

6. Requirements

6.1 *Workmanship*—The tubing shall be homogeneous throughout and free of visible cracks, holes, foreign inclusions, or other defects. The pipe shall be as uniform as commercially practicable in color, opacity, density, and other physical properties.

6.2 *Out-of Roundness*—The maximum out-of roundness requirements, shown in Table 4 for tubing, apply to the average, measured diameter after rounding with a rounding tool recommended by the manufacturer.

6.3 *Dimensions and Tolerances:*

6.3.1 *Outside Diameters*—The outside diameters and tolerances shall be as shown in Table 4, when measured in accordance with 7.4 and 7.4.1.

6.3.2 *Wall Thickness*—The wall thickness and tolerances shall be as shown in Table 1, when measured in accordance with 7.4 and 7.4.2.

NOTE 3—Tubing diameters less than 5/8 in. diameter have minimum wall thicknesses based on both hydrostatic and mechanical strength.

6.4 *Density*—When determined in accordance with 7.5, the crosslinked polyethylene tubing material shall have a minimum density of 0.926 Mg/m³.

6.5 *Hydrostatic Sustained Pressure Strength*—The tubing shall not fail, balloon, burst, or weep as defined in Test Method D 1598, at the test pressures shown in Table 5 when tested in accordance with 7.6.

6.6 *Hydrostatic Burst Pressure*—The minimum burst pressure for PEX plastic tubing shall be as shown in Table 6, when determined in accordance with 7.7.


6.7 *Environmental Stress Cracking*—There shall be no loss of pressure in the tubing, when tested in accordance with 7.8.

6.8 *Degree of Crosslinking*—When tested in accordance with 7.9, the degree of crosslinking for PEX tubing material shall be within the range from 65 to 89 % inclusive. Depending on the process used, the following minimum percentage crosslinking values shall be achieved: 70 % by peroxides, 65 % by Azo compounds, 65 % by electron beam, or 65 % by silane compounds.

NOTE 4—Techniques as found in Test Methods D 2765.

6.9 *Stabilizer Functionality*—Stabilizer Functionality shall be tested in accordance with 7.10.

NOTE 5—For example ASTM F 876 PEX tubing marked with the material designation code PEX 1006 is a PEX tubing meeting the chlorine resistance requirement for 25% of the time at 140°F and 75% of the time at 73°F and having an HDS for water at 73°F of 630psi (HDB of 1250 psi) as follows:

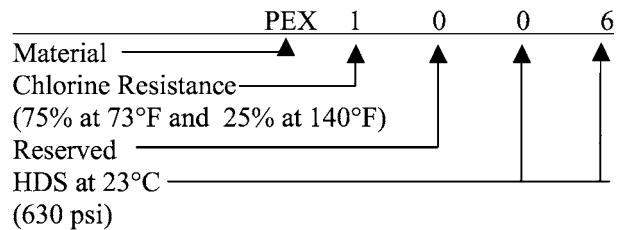

6.10 *Oxidative Stability in Potable Chlorinated Water*

TABLE 2 Material Designation Code Cells

Property	Standard	0	1	2	3	4	5	6	7	8	9
Chlorine Resistance	F 2023	Not tested or rated	75 % at 73°F and 25 % at 140°F	Reserved	50 % at 73°F and 50 % at 140°F	Reserved	100 % at 140°F
Reserved HDS for water at 73°F	630	...	800	...

TABLE 3 Hydrostatic Design Stresses and Pressure Ratings for PEX SDR 9 Tubing for Water at Different Temperatures

Rated Temperature		Hydrostatic Design Stress		Pressure Rating for Water	
°F	°C	psi	(MPa)	psi	(MPa)
73.4	23	630	(4.34)	160	(1.10)
180	82.2	400	(2.76)	100	(0.69)
200	93.3	315	(2.17)	80	(0.55)

Applications—PEX tubing intended for use in the transport of potable water shall have a minimum extrapolated time-to-time failure of 50 years when tested and evaluated in accordance with 7.11.

6.11 Bent Tube Hydrostatic Sustained Pressure Strength:

6.11.1 General—PEX tubing, up to and including 1 in. nominal diameter, can be installed bent by using either of two techniques described in X3.2.4 and X3.2.5, provided that 6.11.2 and 6.11.3 requirements are met.

NOTE 6—PEX tubing, larger than 1 in. nominal diameter, is typically installed as main distribution lines and is installed in straight runs. Fittings are used when a change in direction of 90° or greater and a bend radius of 6 times the outside diameter is needed. The test procedures in 6.11.2 and 6.11.3 are intended to evaluate PEX tubing installed in tight bend applications in accordance with the procedures in X3.2.4 and X3.2.5. This application applies to tubing up to and including 1 in nominal diameter only.

6.11.2 Hot-bent tubing, with a radius of 2.5 times the outside diameter and consisting of a continuous bend length inducing not less than 90° angle, shall meet the minimum hydrostatic sustained pressure strength requirements for 180°F as shown in Table 5 when tested in accordance with 7.6. The bend length and bend angle is kept throughout the testing period by rigid supports immediately outside the bend.

6.11.3 Cold-bent tubing, with a radius of 6 times the outside diameter and consisting of a continuous bend length inducing not less than 90° angle, shall meet the minimum hydrostatic sustained pressure strength requirements for 180°F as shown in Table 5 when tested in accordance with 7.6. The bend length and bend angle is kept throughout the testing period by rigid secures immediately outside the bend.

6.12 Excessive Temperature—Pressure Capacity:

6.12.1 General—In the event of a water heating system malfunction, PEX tubing shall have adequate strength to accommodate short-term conditions, 48 h of 210°F (99°C). 150 psi (1034 kPa) until repairs can be made.

6.12.2 Excessive Temperature Hydrostatic Sustained Pressure—Tubing shall not fail as defined in Test Method D 1598 in less than 30 days (720 h) when tested in accordance with 7.12.

7. Test Methods

7.1 Conditioning—Condition the specimens at 73.4 ± 3.6°F (23 ± 2°C) and 50 ± 5% relative humidity for not less than 40 h prior to test in accordance with Procedure A of Practice D 618, for those tests where conditioning is required. In cases of disagreement, the tolerances shall be ±1.8°F (±1°C) and ±2 % relative humidity.

7.2 Test Conditions—Conduct the test in the standard laboratory atmosphere of 73.4 ± 3.6°F (23 ± 2°C) and 50 ± 5 % relative humidity, unless otherwise specified in the test methods or in this specification. In cases of disagreement, the tolerances shall be ±1.8°F (±1°C) and ±2 % relative humidity.

7.3 Sampling—A sufficient quantity of tubing, as agreed upon by the purchaser and the seller, shall be selected and tested to determine conformance with this specification (see Practice D 1898). In the case of no prior agreement, random samples selected by the testing laboratory shall be deemed adequate.

7.3.1 Test Specimens—Not less than 50 % of the test specimens required for any pressure test shall have at least a part of the marking in their central sections. The central section is that portion of tubing that is at least one tubing diameter away from an end closure.

7.4 Dimensions and Tolerances—Use any length of tubing to determine the dimensions. Measure in accordance with Test Method D 2122.

7.4.1 Outside Diameter—Measure the outside diameter of the tubing in accordance with Test Method D 2122. The referee method of measurement is to be by circumferential wrap tape. The tolerance for out-of-roundness shall apply only to tubing prior to shipment. Averaging micrometer or vernier caliper measurements, four (4) maximum and minimum diameter measurements at any cross section, may be used for quality control checks if desired.

7.4.2 Wall Thickness—Make micrometer measurements of the wall thickness in accordance with Test Method D 2122 to determine the maximum and minimum values. Measure the wall thickness at both ends of the tubing to the nearest 0.001 in. (0.025 mm).

7.5 Density—Determine the density of the tubing compound in accordance with Test Method D 1505, or Test Methods D 792, using three specimens.

7.6 Hydrostatic Sustained Pressure Test—Select the test specimens at random. Test individually with water at the three controlled temperatures and under the pressures given in Table 5, 18 specimens of tubing, each specimen at least ten times the nominal diameter in length, but not less than 10 in. (25.4 cm)

TABLE 4 Outside Diameters and Tolerances for PEX Tubing

Nominal Tubing Size		Average Outside Diameter		Tolerances for Average Diameter		Out-of-Roundness ^A	
in.	mm	in.	mm	in.	mm	in.	mm
1/8	3	0.250	6.35	±0.003	±0.08	0.008	0.20
1/4	7	0.375	9.52	±0.003	±0.08	0.008	0.20
5/16	8	0.430	10.92	±0.003	±0.08	0.008	0.20
3/8	10	0.500	12.70	±0.003	±0.08	0.012	0.32
1/2	13	0.625	15.88	±0.004	±0.10	0.016	0.40
5/8	16	0.750	19.05	±0.004	±0.10	0.016	0.40
3/4	19	0.875	22.22	±0.004	±0.10	0.016	0.40
1	25	1.125	28.58	±0.005	±0.12	0.020	0.48
1 1/4	32	1.375	34.92	±0.005	±0.12	0.020	0.48
1 1/2	38	1.625	41.28	±0.006	±0.16	0.024	0.60
2	51	2.125	53.98	±0.006	±0.16	0.030	0.76
2 1/2	64	2.625	66.68	±0.007	±0.18	0.038	0.95
3	76	3.125	79.38	±0.008	±0.20	0.045	1.14
3 1/2	89	3.625	92.08	±0.008	±0.20	0.046	1.16
4	102	4.125	104.78	±0.009	±0.23	0.052	1.32
4 1/2	114	4.625	117.48	±0.009	±0.23	0.059	1.49
5	127	5.125	130.18	±0.010	±0.25	0.065	1.65
6	152	6.125	155.58	±0.011	±0.28	0.072	1.83

^A The Out-of-Roundness specification applies only to tubing prior to coiling.

TABLE 5 Minimum Hydrostatic Sustained Pressure Requirements for PEX Nominal SDR 9 Tubing

Nominal Tubing Size		Pressure Required for Test, psi ^A (MPa)					
in.	mm	73.4°F (23°C)	180°F (82.2°C)	200°F (93.3°C)	73.4°F (23°C)	180°F (82.2°C)	200°F (93.3°C)
1/8	3	595 (4.10)	355 (2.45)	300 (2.07)	595 (4.10)	355 (2.45)	300 (2.07)
1/4	7	515 (3.55)	305 (2.10)	260 (1.79)	515 (3.55)	305 (2.10)	260 (1.79)
3/8	10	425 (2.93)	250 (1.72)	210 (1.45)	425 (2.93)	250 (1.72)	210 (1.45)
1/2	13	330 (2.28)	195 (1.34)	165 (1.14)	330 (2.28)	195 (1.34)	165 (1.14)
5/8 and larger	16 and larger	325 (2.24)	190 (1.31)	165 (1.14)	325 (2.24)	190 (1.31)	165 (1.14)

^A The fiber stresses used to derive these test pressures are:
at 73.4°F (23.0°C) 1300 psi (8.96 MPa).
at 180°F (82.2°C) 770 psi (5.31 MPa).
at 200°F (93.3°C) 650 psi (4.48 MPa).

TABLE 6 Burst Pressure Requirements for Water at Different Temperatures for PEX SDR 9 Plastic Tubing

Nominal Tubing Size		Minimum Burst Pressures at Different Temperatures, psi ^A (MPa)					
in.	mm	73.4°F (23°C)	180°F (82.2°C)	200°F (93.3°C)	73.4°F (23°C)	180°F (82.2°C)	200°F (93.3°C)
1/8	3	870 (6.00)	390 (2.69)	330 (2.28)	870 (6.00)	390 (2.69)	330 (2.28)
1/4	7	752 (5.19)	336 (2.32)	285 (1.96)	752 (5.19)	336 (2.32)	285 (1.96)
3/8	10	620 (4.27)	275 (1.90)	235 (1.62)	620 (4.27)	275 (1.90)	235 (1.62)
1/2	13	480 (3.31)	215 (1.48)	185 (1.28)	480 (3.31)	215 (1.48)	185 (1.28)
5/8 and larger	16 and larger	475 (3.27)	210 (1.45)	180 (1.24)	475 (3.27)	210 (1.45)	180 (1.24)

^A The fiber stresses used to derive these test pressures are:
at 73.4°F (23.0°C) 1900 psi (13.10 MPa).
at 180°F (82.2°C) 850 psi (5.86 MPa).
at 200°F (93.3°C) 720 psi (4.96 MPa).

or more than 3 ft (91.4 cm) between end closures and containing the permanent marking on the tubing. Test six specimens at each temperature. Condition the specimens for at least 2 h to within ± 3.6°F (±2°C) of the specified test temperatures. Maintain the specimens at the pressures indicated for the appropriate temperatures for a period of 1000 h. Hold the pressure as closely as possible, but within ± 10 psi (±0.070 MPa). Maintain the test temperatures within ± 3.6°F (±2°C) of the specified temperature. Test in accordance with Test Method D 1598 except maintain the pressure at the values given in Table 5 for 1000 h. Failure of two of the six specimens

tested at either temperature constitutes failure in the test. Failure of one of six specimens tested at either temperature is cause for retest of six additional specimens at that temperature. Failure of one of six specimens tested at either temperature in retest constitutes failure in the test. Failure of the tubing shall be defined in accordance with Test Method D 1598, namely:

7.6.1 *Failure*—Any continuous loss of pressure resulting from the transmission of the test liquid through the body of the specimen under test.

7.6.2 *Ballooning*—Any abnormal localized expansion of a tubing specimen while under internal hydraulic pressure.

7.6.3 *Bursting*—Failure by a break in the tubing with immediate loss of test liquid and continued loss at essentially no pressure.

7.6.4 *Seepage or Weeping*—Failure that occurs through essentially microscopic breaks in the tubing wall, frequently only at or near the test pressure.

NOTE 7—At lower pressures, the pipe may carry liquids without evidence of loss of liquids.

7.7 *Hydrostatic Burst Pressure*—Determine the minimum burst pressure with at least five specimens in accordance with Test Method D 1599. The time of testing of each specimen shall be between 60 and 70 s. The pressure values are given in Table 6.

7.8 *Environmental Stress Cracking Test*—Use six randomly selected 10-in. (250-mm) long specimens for this test. Make a notch on the inside of the tubing wall in the axial direction. The notch depth shall be 10 % of measured minimum wall thickness and the notch length 1 in. (25 mm). Use a sharp blade mounted in a jig to make this imperfection. Use a depth micrometer or other means for setting the blade in the jig so that the notch depth is controlled as specified. The notch shall be placed, at its nearest point, at least 1.5 times the nominal diameter away from end closures. Fill the tubing with the test medium which is 5 % “Igepal CO-630”¹⁰ mixed with 95 % of untreated water. The test is then made in accordance with 7.6, under the pressures given in Table 5, except maintain the pressure for 100 h.

7.9 *Degree of Crosslinking*—Place a tubing sample in a lathe with automatic feeding. Shave a strip that consists of the full wall thickness. The strip thickness shall be approximately 0.004 in. (0.1 mm) which is obtained by setting the lathe feeding accordingly. Test the specimens in accordance with Test Methods D 2765, Method B, with the only deviation: test specimen preparation. For the purpose of this specification, degree of crosslinking (V) is defined as 100 % minus extract percent equals V .

NOTE 8—This method provides a test method for measuring the average degree of crosslinking over the tube wall thickness. That, however, does not mean that the degree of crosslinking is allowed to vary outside the limits for the grade in question at any part of the tubing. In case of disagreement, strips of the same thickness, 0.004 in. (0.1 mm), can be taken in tangential, axial, or radial direction at any angle section or wall thickness depth, or both, etc. to measure the degree of crosslinking.

7.10 *Stabilizer Functionality*—The functionality of a stabilizer in a specific PEX compound shall be verified by hydrostatic testing of pipe made from the compound. Test six pipe samples continuously for 3000 h at a hoop stress of 0.70 MPa at 120° C, or for 8000 h at a hoop stress of 2.8 MPa at 110° C. This test is used to demonstrate the specific compound’s ability to withstand long term temperature conditions set forth elsewhere in this standard.

7.10.1 *Procedure*—The test procedure shall be conducted in accordance with Test Method D 1598 or ISO 1167. Test six (6) samples at one of the temperature conditions in 7.10. The

internal medium is water the external medium is air. Failure of any one of the specimens constitutes failure of the test.

7.10.2 *Significance*—The test need only be performed for the original validation of pipe made from a particular compound.

7.11 *Oxidative Stability in Potable Chlorinated Water Applications*—The test shall be conducted, and the extrapolated time-to-failure shall be determined in accordance with Test Method F 2023. The test fluid shall be prepared in accordance with 9.1.1 of Test Method F 2023. The extrapolated time-to-failure shall be calculated in accordance with 13.3 of Test Method F 2023 and as follows:

7.11.1 For a chlorine resistance cell of “1” using the coefficients from Test Method F 2023, 13.1 and using Miners Rule, calculate the estimated time to-failure for a hoop stress corresponding to a sustained internal pressure of 80 psig (551.7 kPa) for the DR of the tested specimens at temperature exposure conditions of 25 % of the total time at 140°F (60°C) and 75% of the total time at 73°F (23°C) in accordance with ISO 13760.

7.11.2 For a chlorine resistance cell of “3” using the coefficients from Test Method F 2023, 13.1, and using Miners Rule, calculate the estimated time to-failure for a hoop stress corresponding to a sustained internal pressure of 80 psig (551.7 kPa) for the DR of the tested specimens at temperature exposure conditions of 50 % of the total time at 140°F (60°C) and 50% of the total time at 73°F (23°C) in accordance with ISO 13760.

7.11.3 For a chlorine resistance cell of “5”, using the coefficients from Test Method F 2023, 13.1, calculate the estimated time-to-failure at a hoop stress corresponding to a sustained internal pressure of 80 psig (551.7 kPa) for the DR of the tested specimens at temperature of 100% of the time at 140°F (60°C)

7.11.4 *Significance*—The test need only be performed on representative pipe samples for the original validation of pipe made from a particular compound.

NOTE 9—The conditions described in Test Method F 2023, 13.3 only apply to intermittent service such as might be found in normal residential use. This does not validate the use of PEX tubing in continuous recirculation applications.

7.12 *Excessive Temperature and Pressure Capability:*

7.12.1 *Hydrostatic Sustained Pressure*—Determine in accordance with Test Method D 1598, except for the following requirements:

7.12.1.1 Test at least six specimens from randomly selected specimens diameter ½ in. or greater. Specimens shall be at least 5 pipe diameters long.

7.12.1.2 Condition tubing in accordance with 7.1.

7.12.1.3 Test temperature shall be 210 ± 4°F (99 ± 2°C).

7.12.1.4 The external test environment shall be air.

7.12.1.5 Fill the specimens with water and condition for 2 h at a temperature of 210 ± 4°F (99 ± 2°C) and a pressure of 30 ± 3 psi (207±21kPa).

7.12.1.6 Pressurize test specimens to the required pressure and maintain for 30 days (720 h). The pressure for PEX tubing shall be 150 psi (1034 kPa), for SDR9 diameters. The fiber stress used to derive this test pressure is 595 psi (4.1 MPa).

¹⁰ This method is based on the use of “Igepal Co-630,” a trademark for a nonylphenoxy poly (ethyleneoxy) ethanol, which may be obtained from GAF Corp., Dyestuff and Chemical Div., 140 W. 51st St., New York, NY 10020.